






TURNING SPACES INTO SUCCESS STORIES **SINCE 1999**

At Lavish, we combine innovation, craftsmanship, and strict quality standards to produce exceptional ceramic tiles. Recognized globally and backed by certifications like ISO 9001:2015, ISO 14025:2006, CE, and UK CA, we've become a trusted name in over 85 countries. Our unique designs and dedication to perfection set us apart as true artisans in the tile industry.

BUILT ON THE FOUNDATION OF

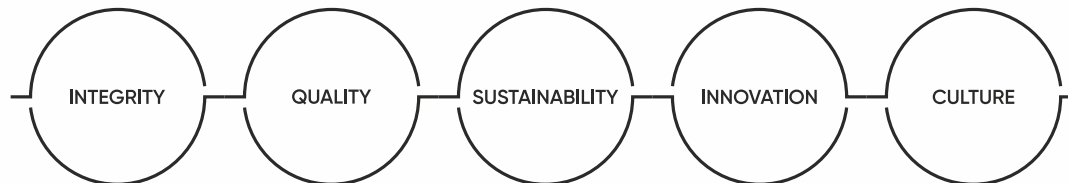

WALL & FLOOR TILES

Craftsmanship is also at the heart of our brand! In a way, we don't consider ourselves manufacturers but we see ourselves as a team of skilled artisans who take great care in crafting beautiful surfaces that are unmatched, unparalleled, and unrivaled! The uniqueness of our product is reflected in our designs, colors, sizes, and finishes which are exclusive to us and different by all means! In short, "We are a breath of fresh air in a sea of sameness"!

Glazed Porcelain Tiles
30x60 | 60x60 | 80x80
60x120 | 80x160 | 100x100
120x120 | 120x180cm

Wooden Tiles
10x60cm | 20x120 | 30x120
20x160 | 26x160cm

Architectural Surfaces
30x120cm


Ceramic Wall Tiles
25x40 | 30x60cm
Subway Tiles

Double Charged Tiles
60x60 | 60x120cm

Fullbody
60x60 | 60x120cm

Outdoor Tiles
30x30 | 30x60 | 60x60 | 60x90
60x120 | 20x120 | 30x120cm

Thickness
07mm | 08mm | 09mm
12mm | 20mm

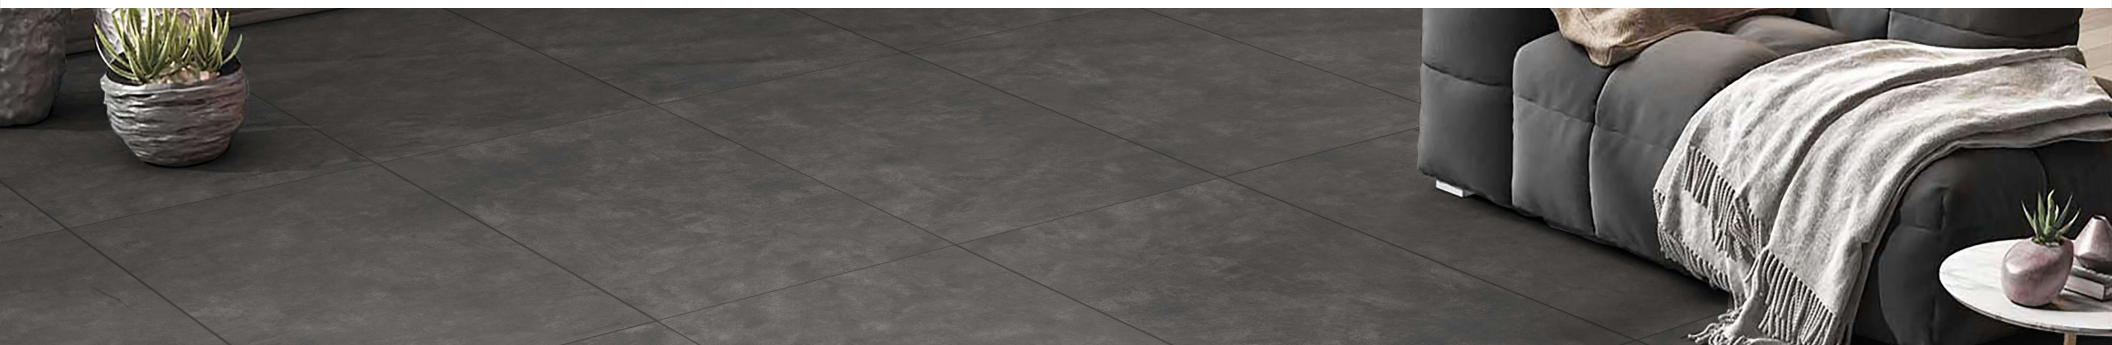

Discover a whole new concept of space embellishment with the GT series. Amalgamating together the charm of stone and elegance of wood to incite the implicit aura of grandeur in your surroundings.





CLASS:5
STAIN RESISTANCE

Stain Resistance Test is classified from Class 1 to Class 5. This test determines a surface's stain resistance.

Staining tests are performed by exposing the tile surface to test solutions and dry staining agents over an extended period. After the staining agent has been removed from the tiles using a mixture of cleaning processes, they are visually examined. In this test, we have achieved class-5, which is maximum class we can achieve in Porcelain Tile!



CLASS:7
HARDNESS MOH SCALE


We have got class 7 in this test, which is the highest you could achieve in Porcelain Tile.

This is a hardness scale ranging from 1 (talc) to 10 (diamond) that is used to determine the scratch resistance of a material. Porcelain tile is usually comes with mohs scale 5 to 6, whereas as LAVISH's GT series has got class 7.

ambient
SERIES




600x
1200mm
800x
1600mm

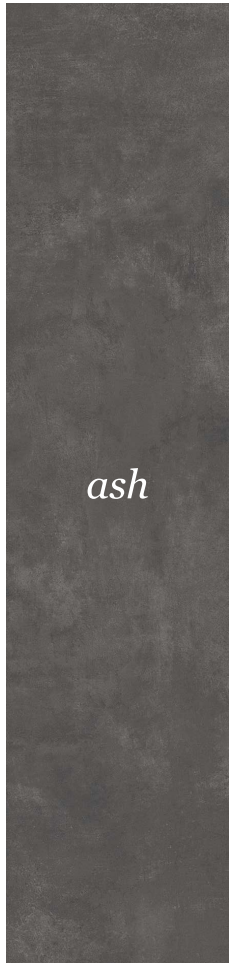


ash



crema

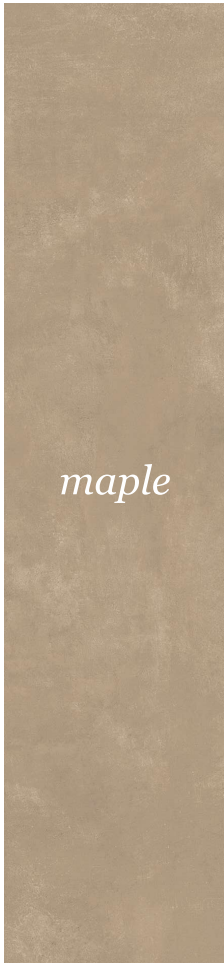

maple

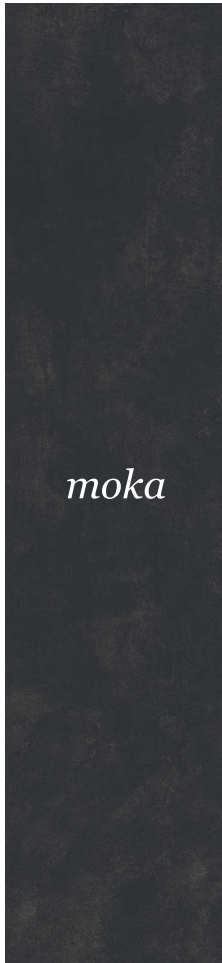

moka



pearl





smoke



taupe



walnut

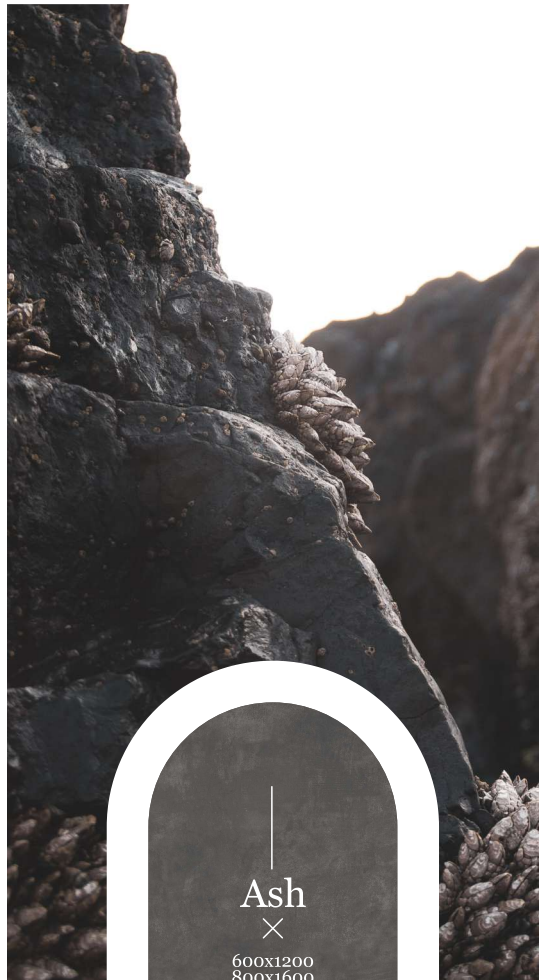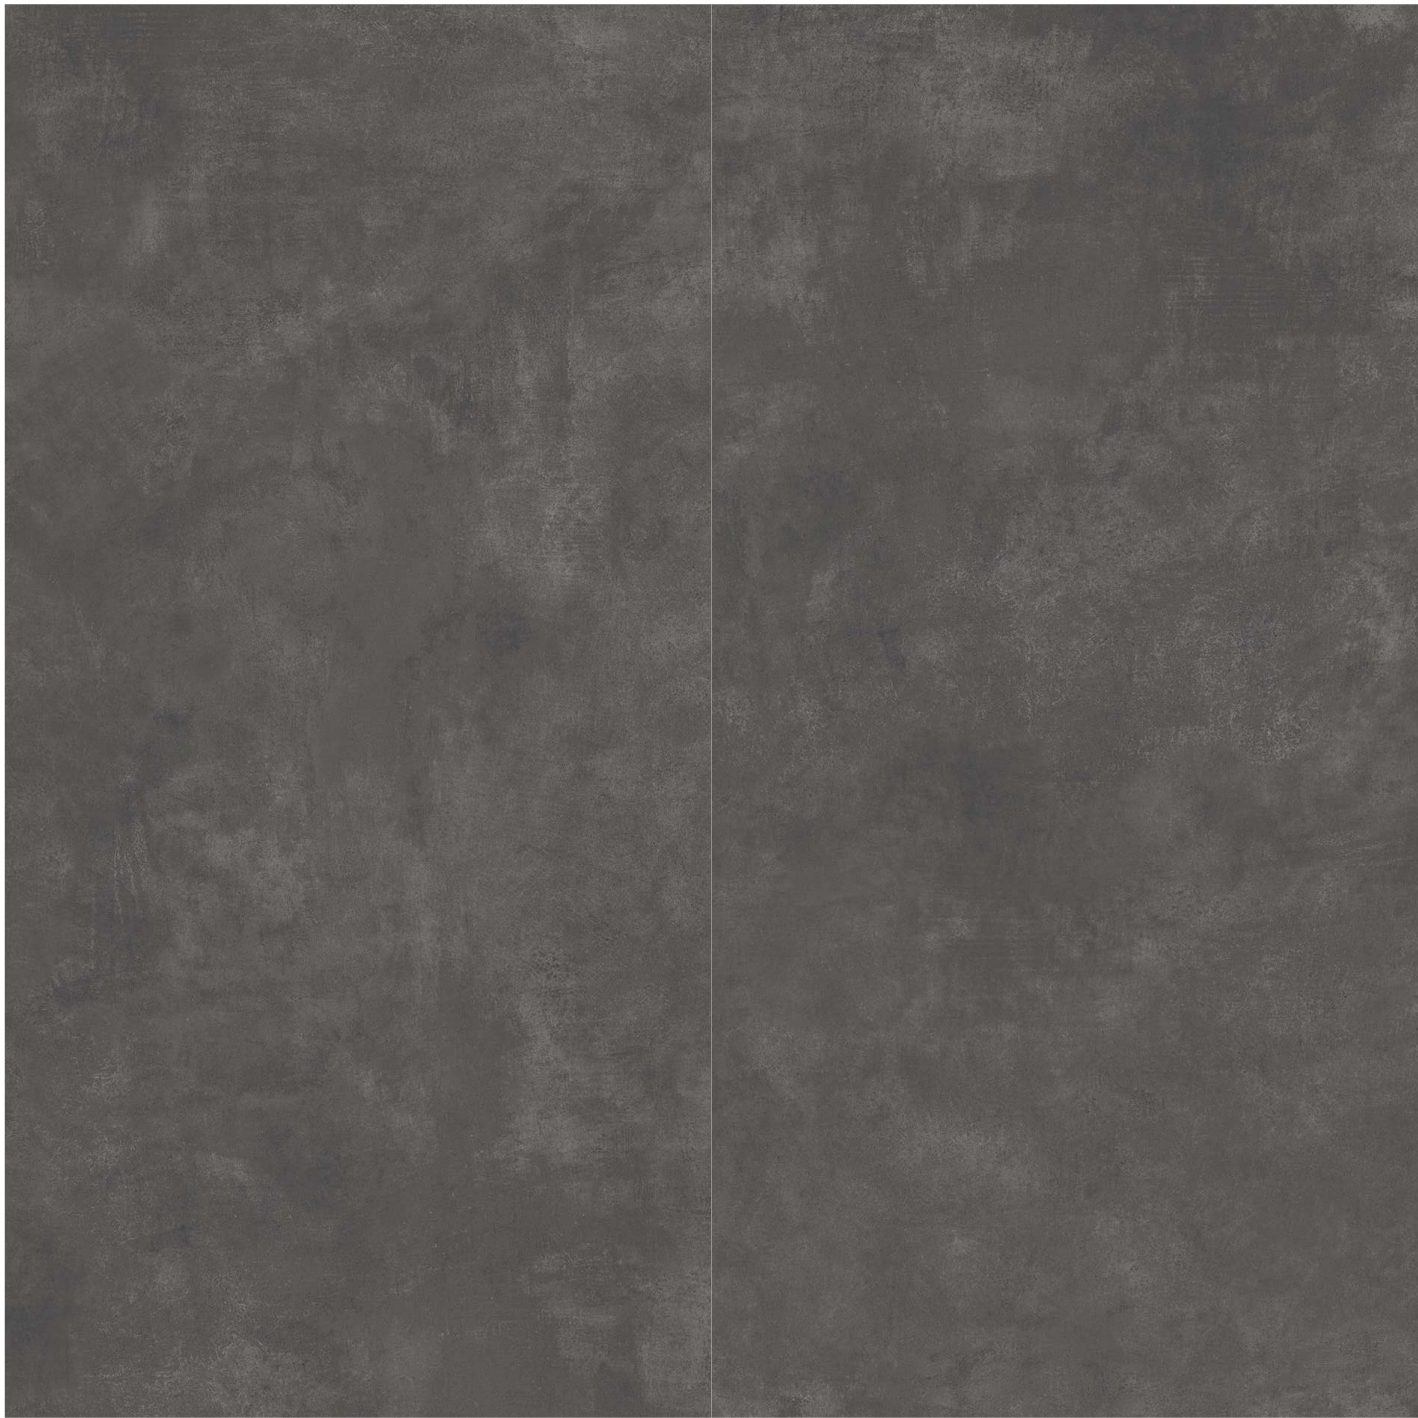



Ash
×
600x1200
800x1600




Crema

×
600x1200
800x1600





Crema
×
600x1200
800x1600


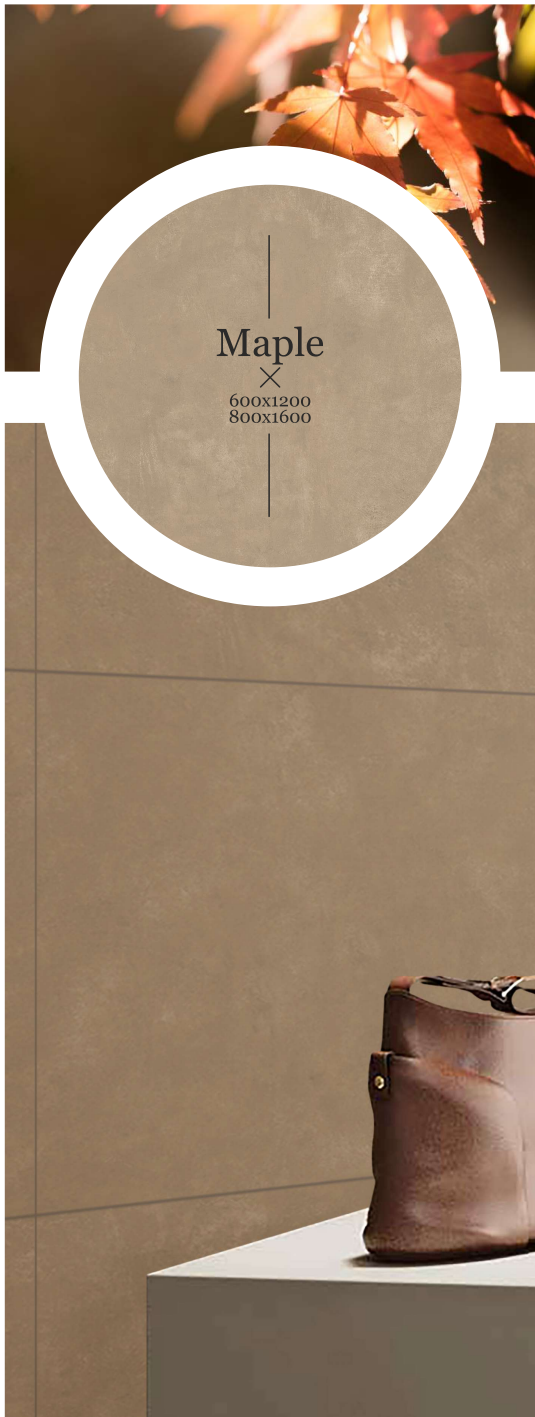


Maple


600x1200
800x1600



Maple
X
600x1200
800x1600

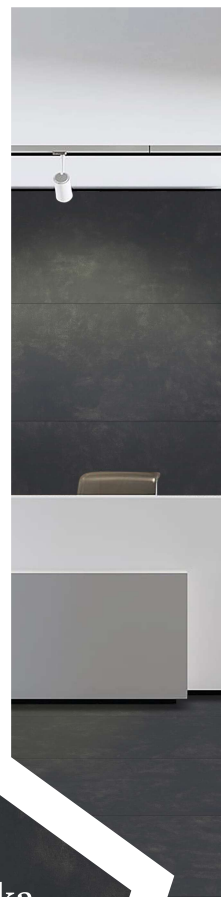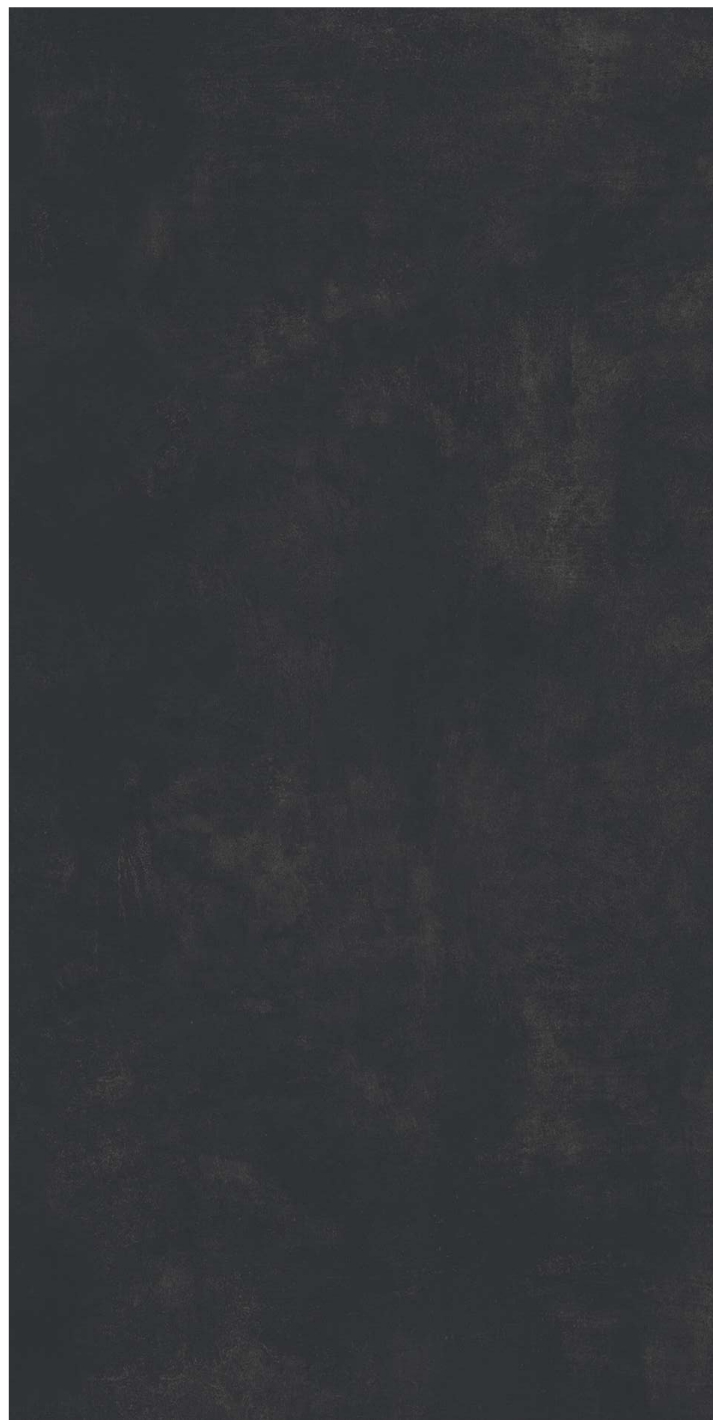


Moka
×
600x1200
800x1600

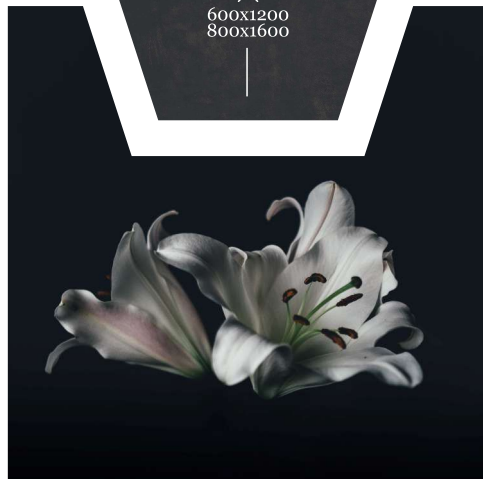






Moka
×
600x1200
800x1600

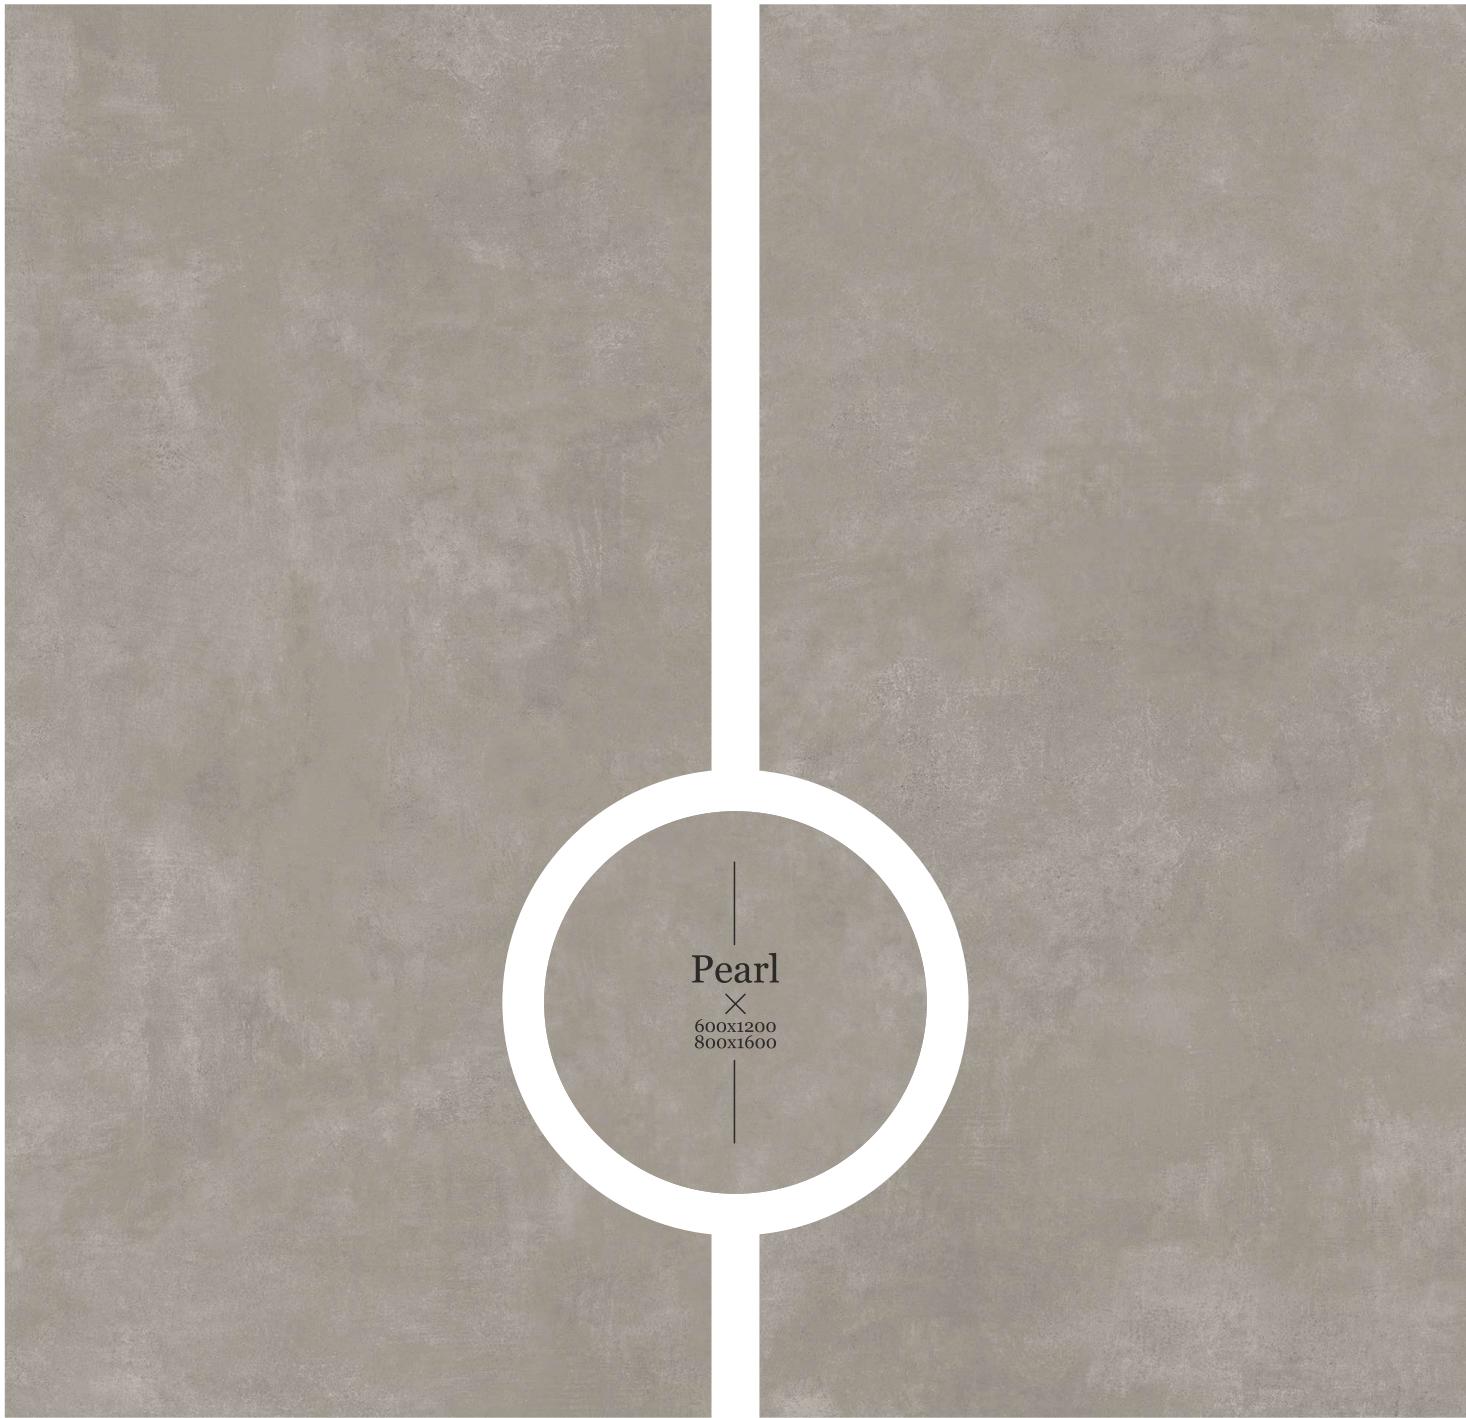




Pearl
X
600x1200
800x1600

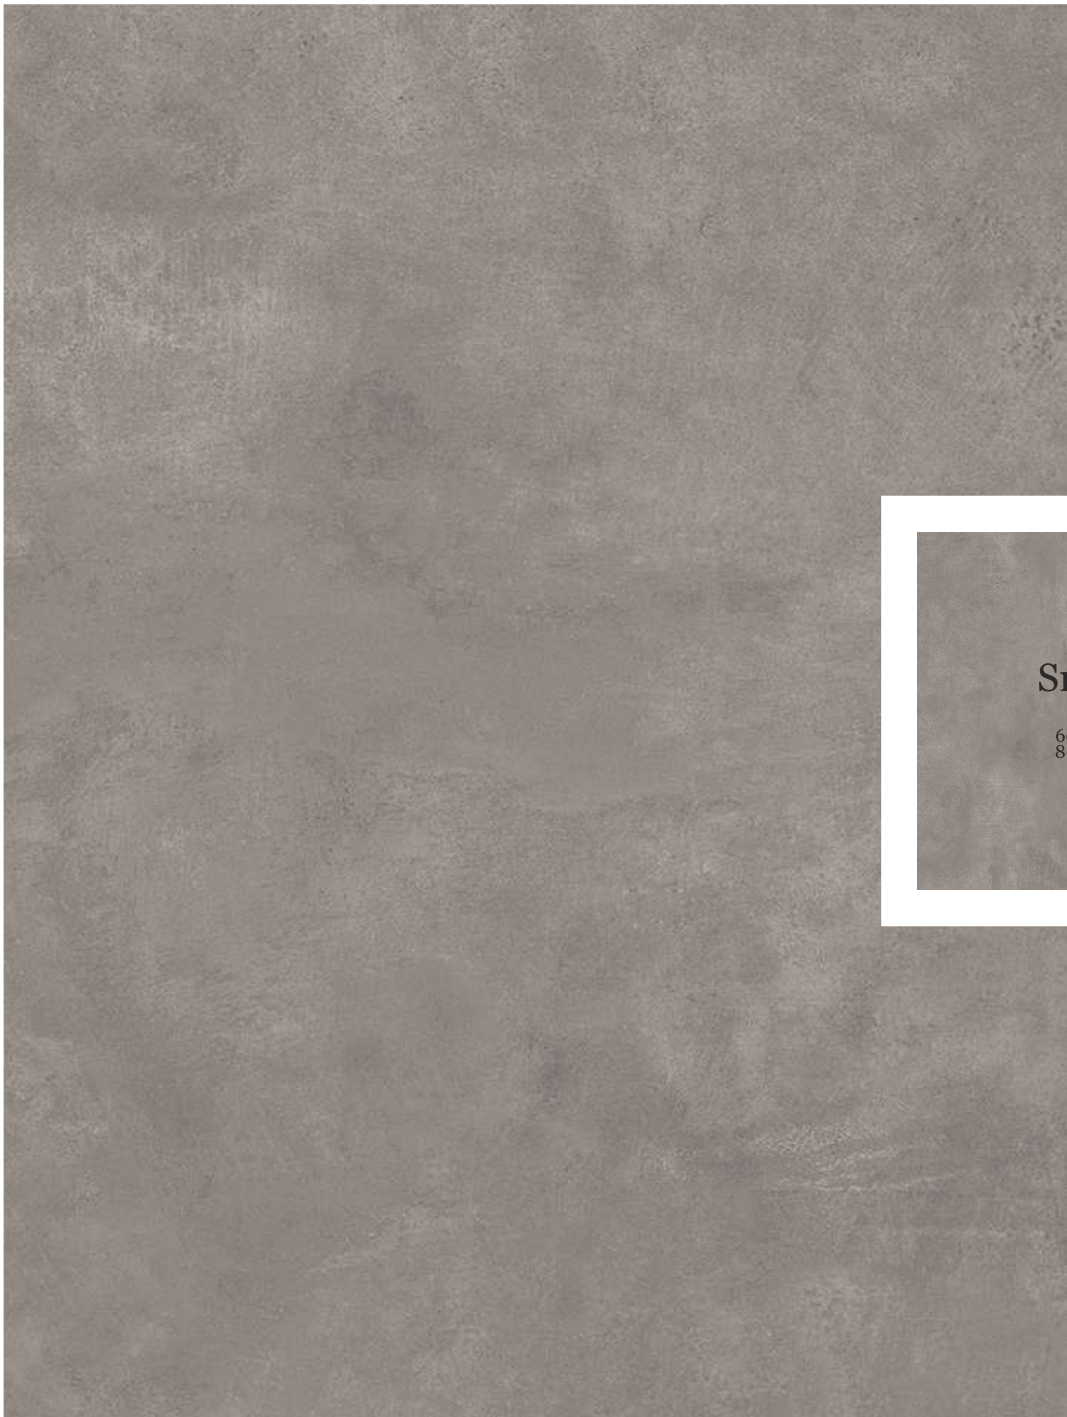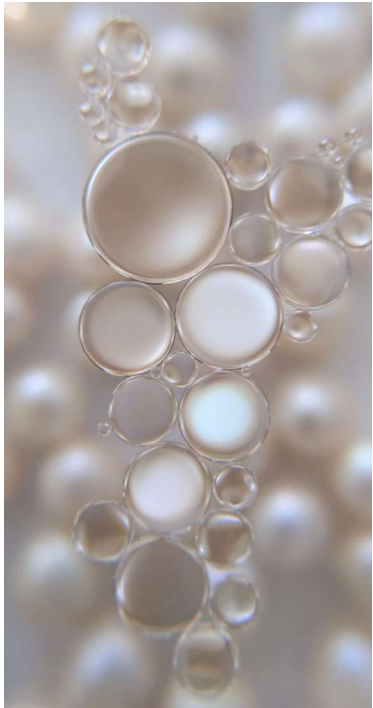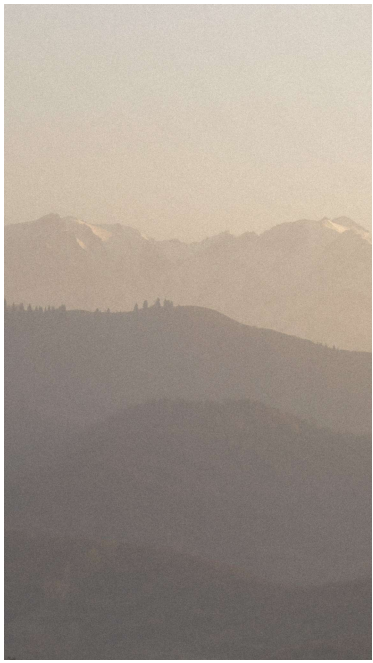



Smoke
X
600x1200
800x1600

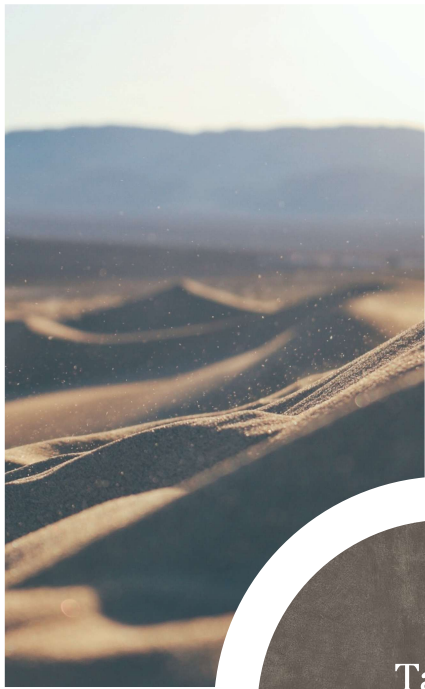





Taupe
X
600x1200
800x1600



Wallnut

×
600x1200
800x1600

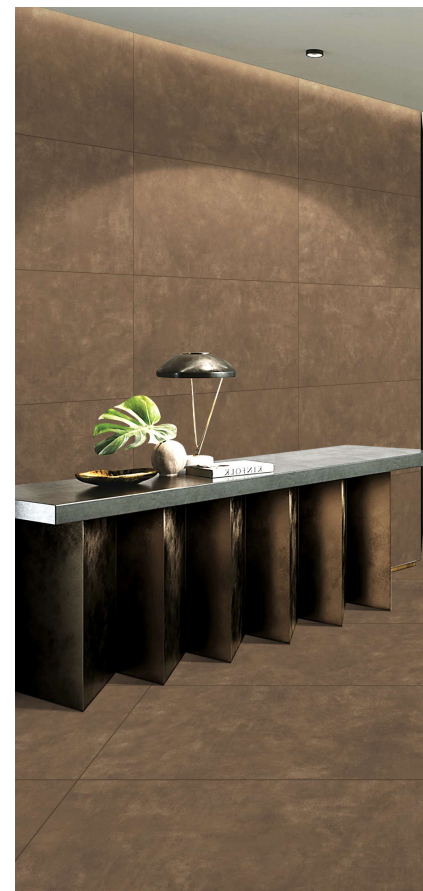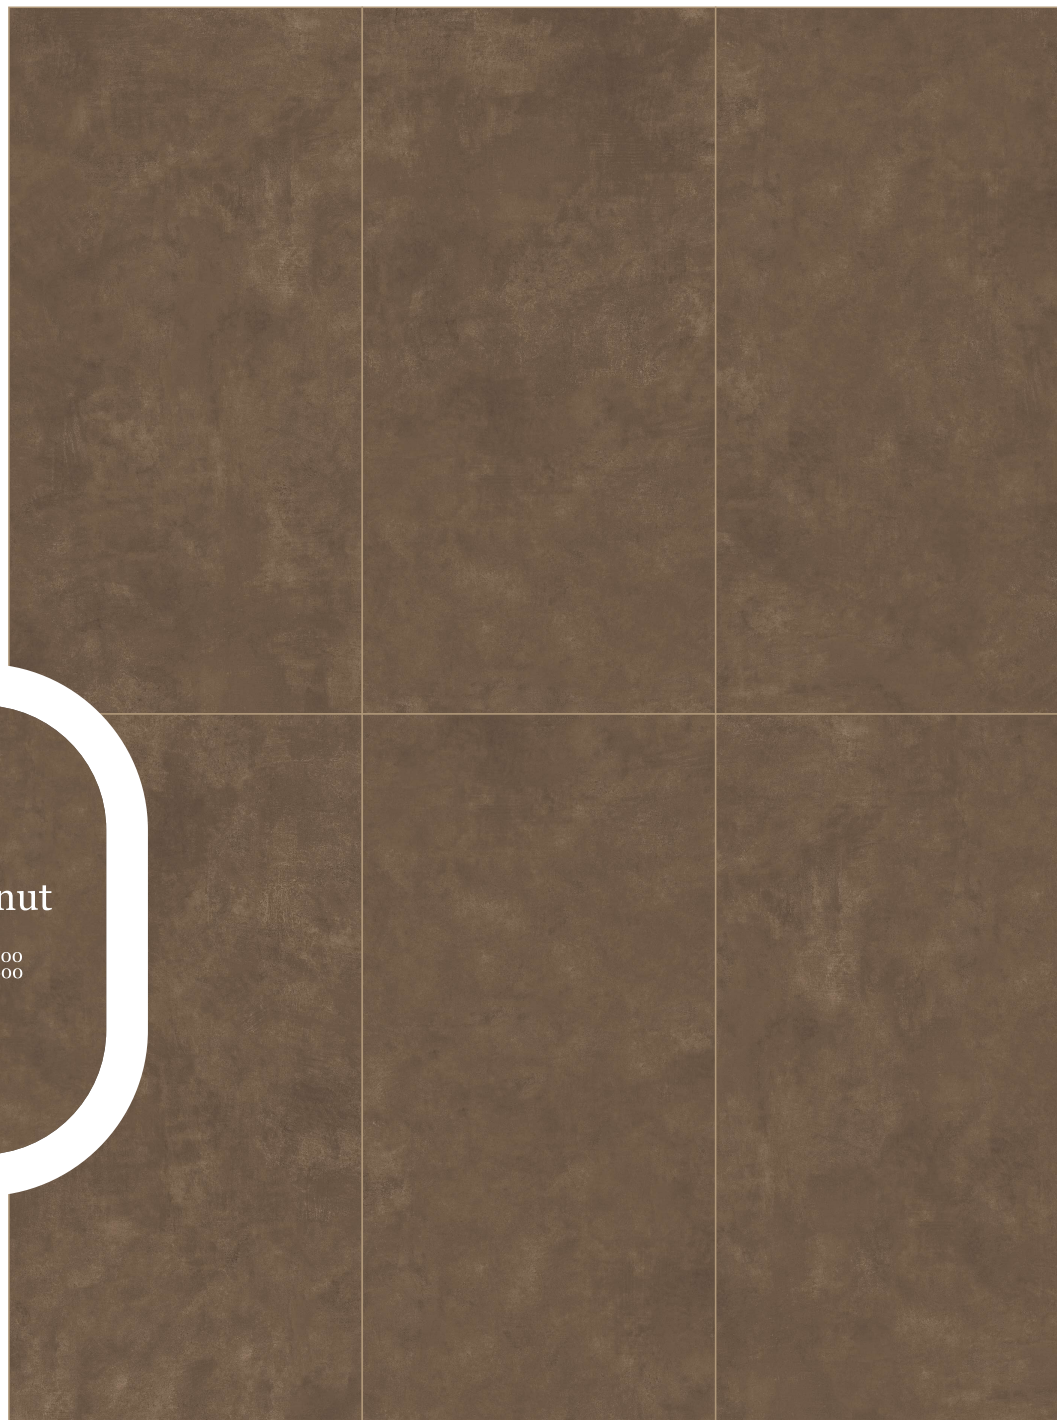



Walnut
×
600x1200
800x1600



choco

crema

graphite

gris


smoke



Choco


×

600x1200
800x1600

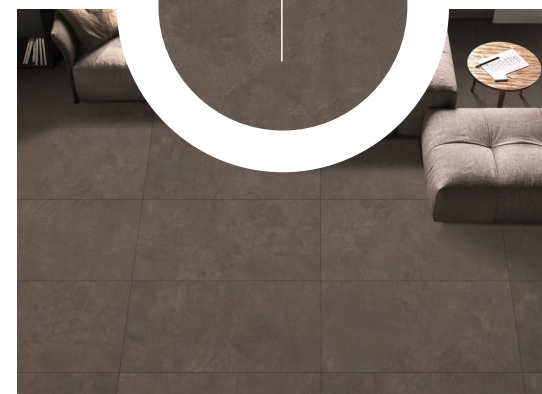





Choco
×
600x1200
800x1600

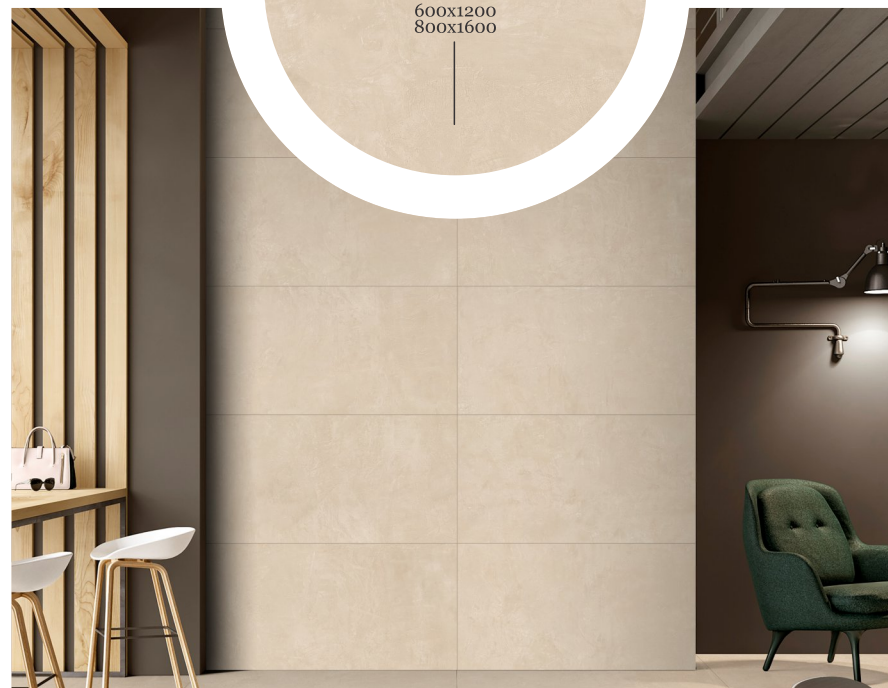




Crema
×
600x1200
800x1600

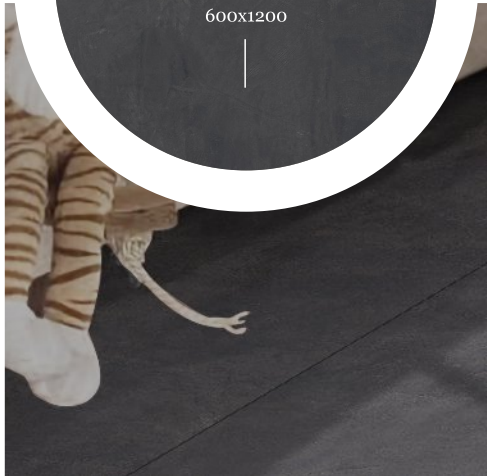
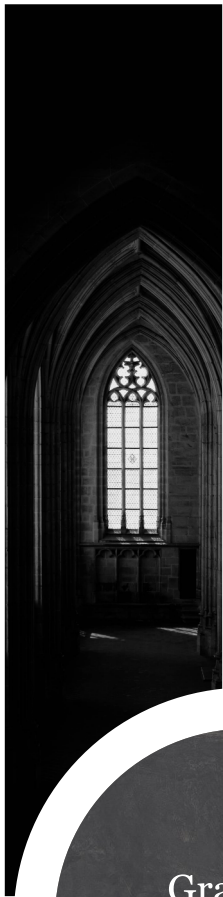


Graphite
X
600x1200

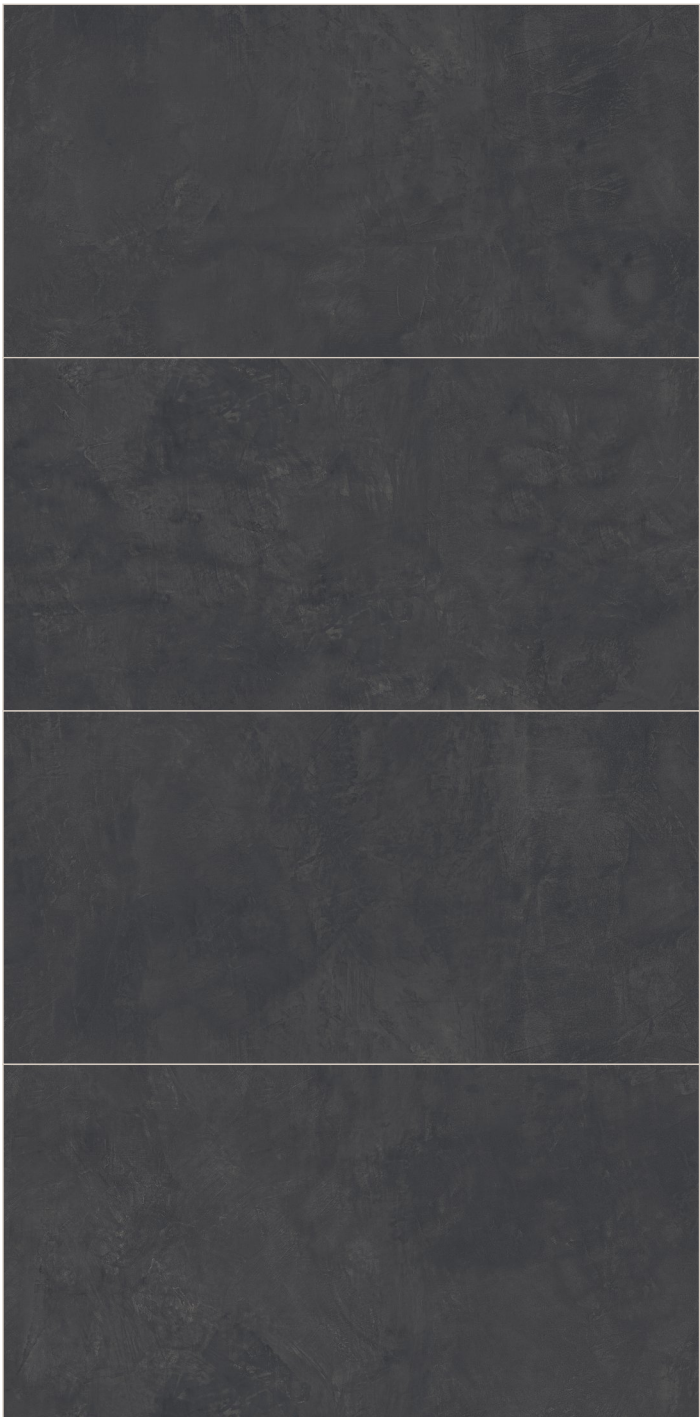




Graphite
X
600x1200
800x1600

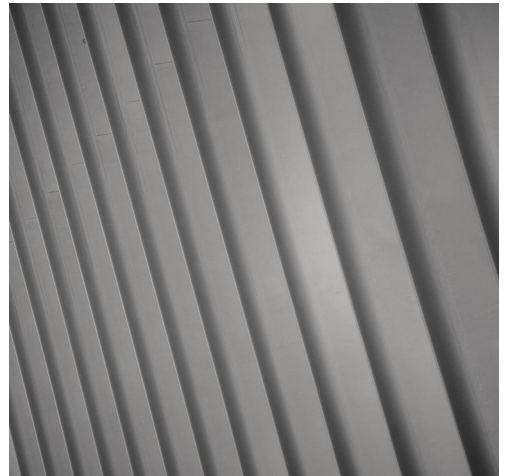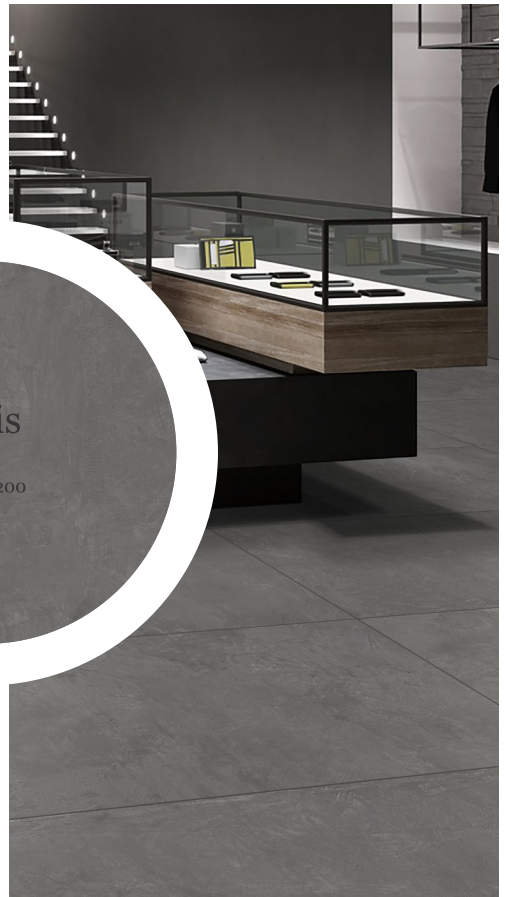



Gris
X
600x1200
800x1600

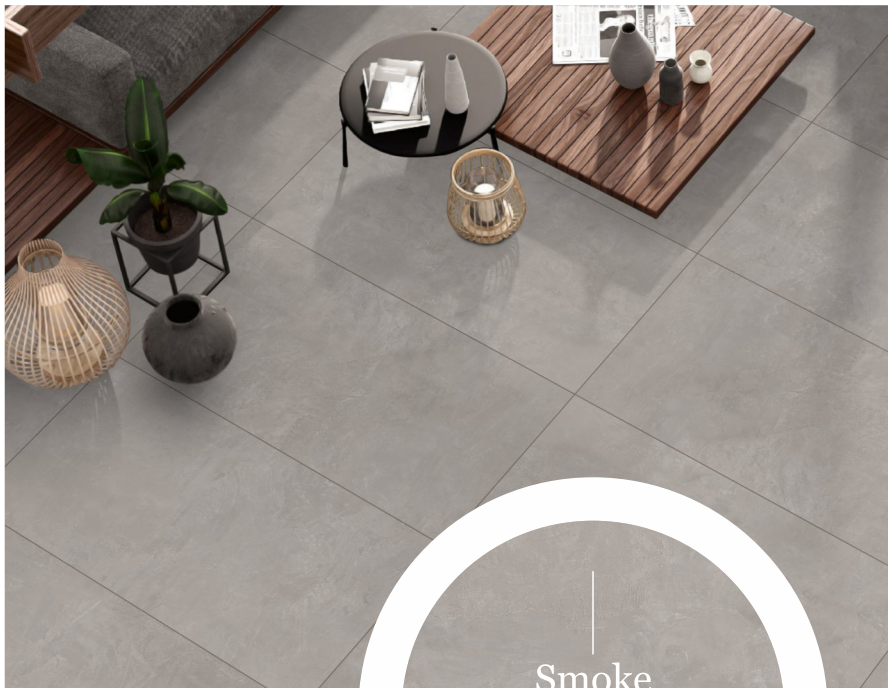

Smoke
×
600x1200





Smoke
X
600x1200
800x1600







Beige
X
600x1200
800x1600



Bianco

×
600x1200
800x1600






Bianco
X
600x1200
800x1600







Natural
X
600x1200
800x1600

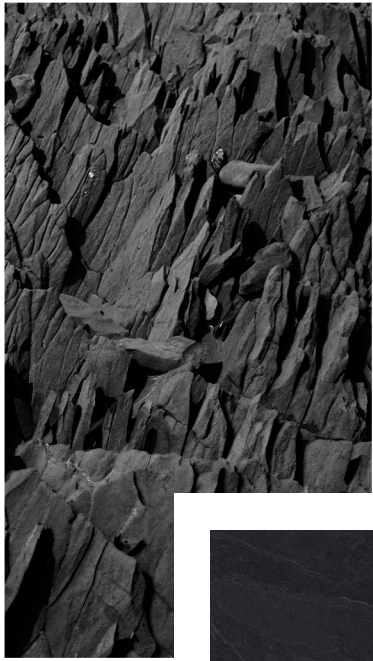


Nero
×
600x1200
800x1600

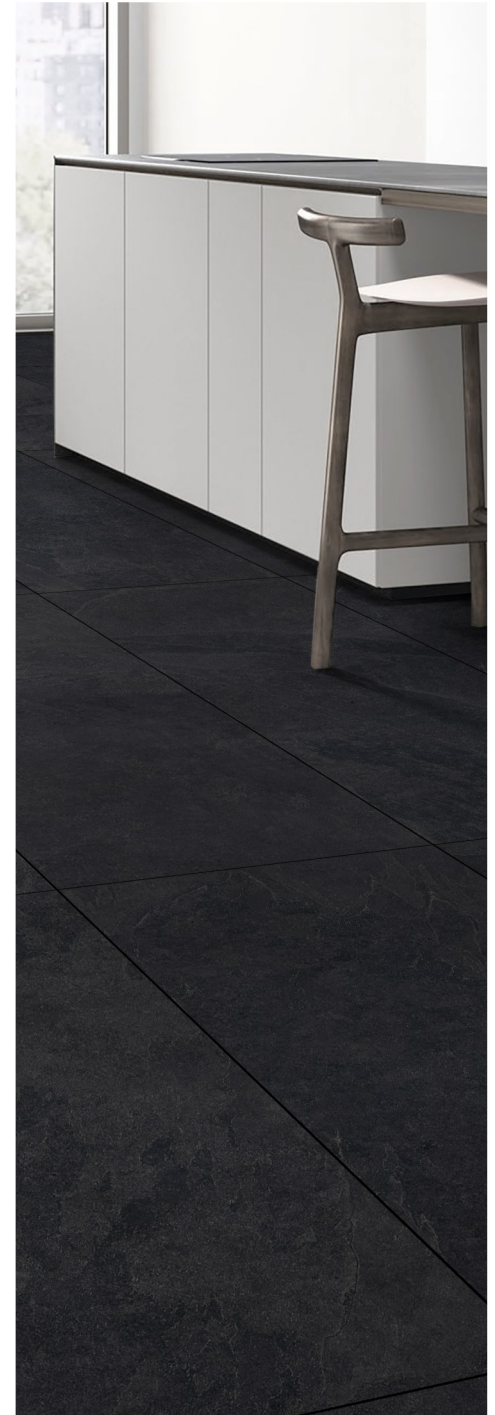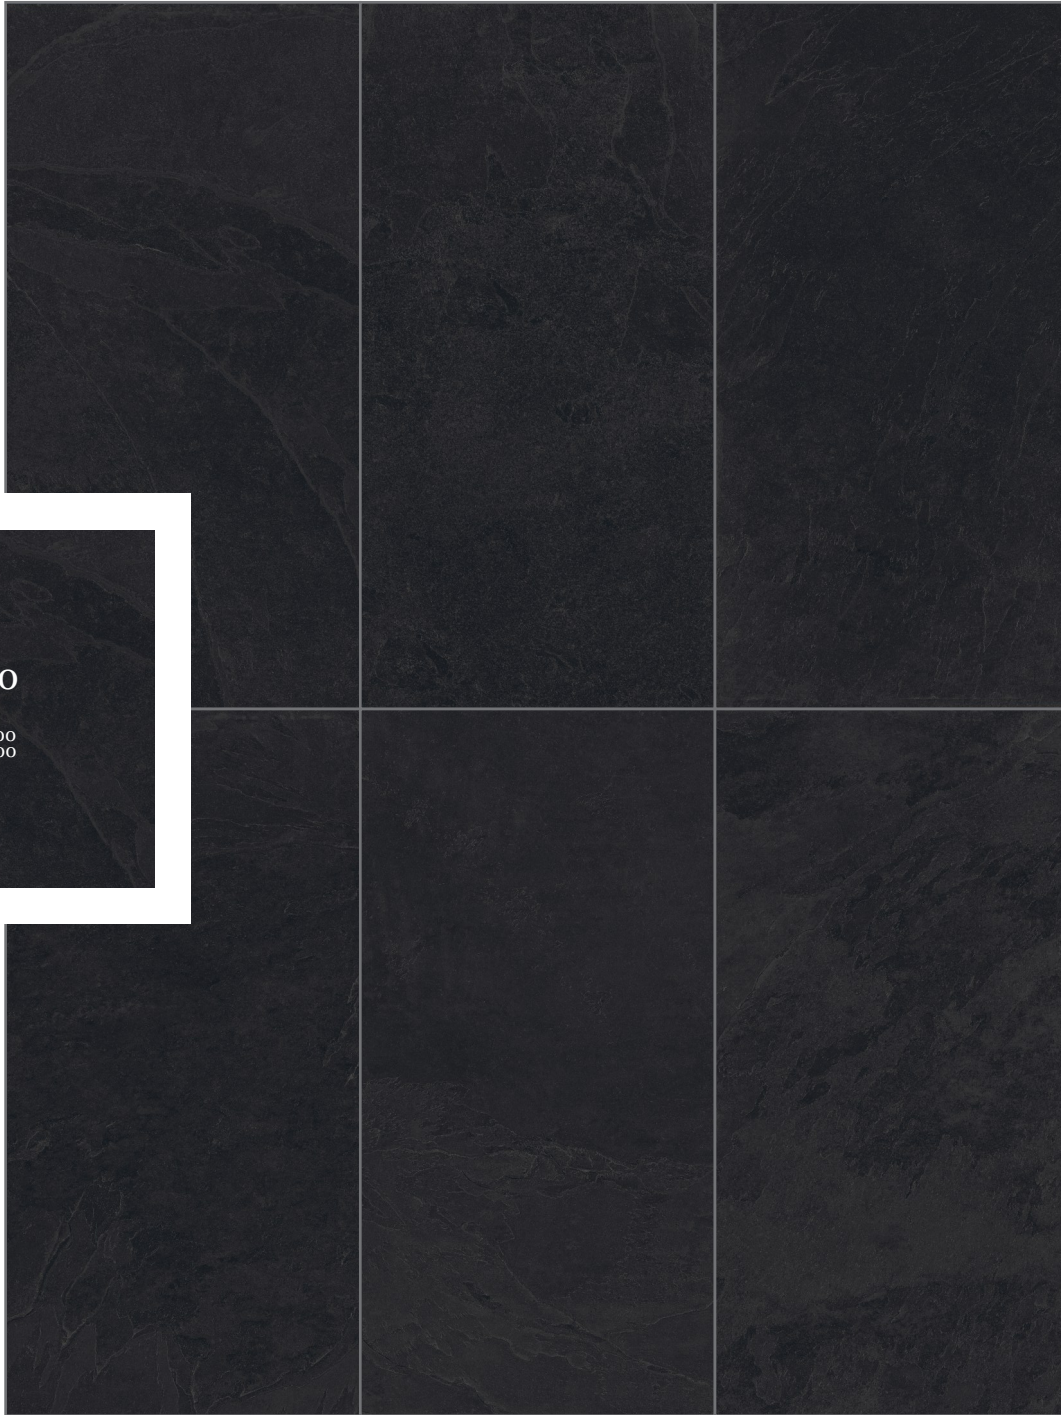



Nero
×
600x1200
800x1600

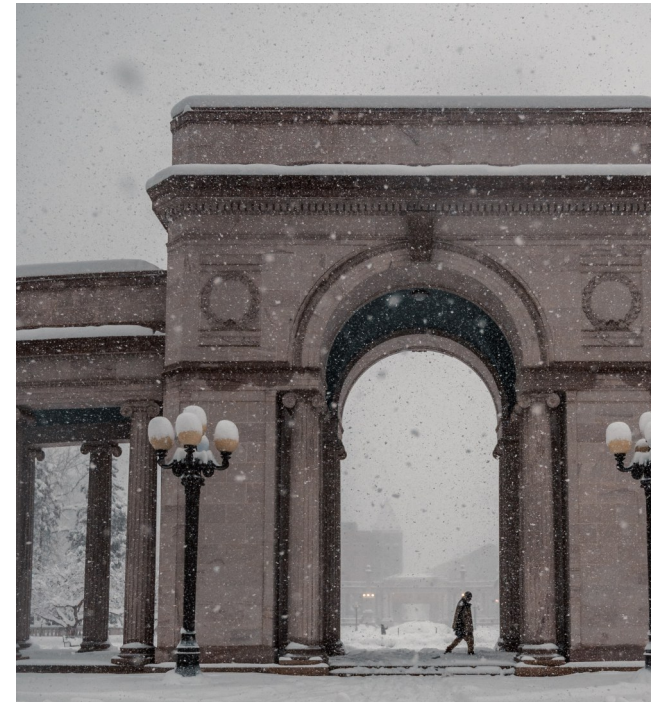



Smoke
X
600x1200
800x1600


black

brown

camel


crema

marfil

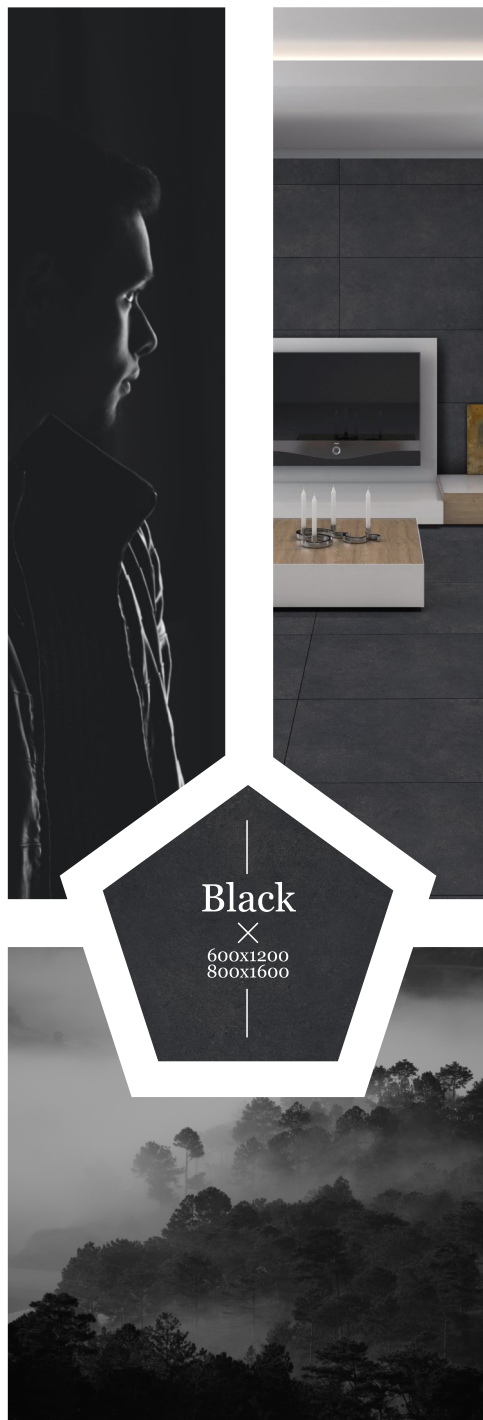





Black
×
600x1200
800x1600


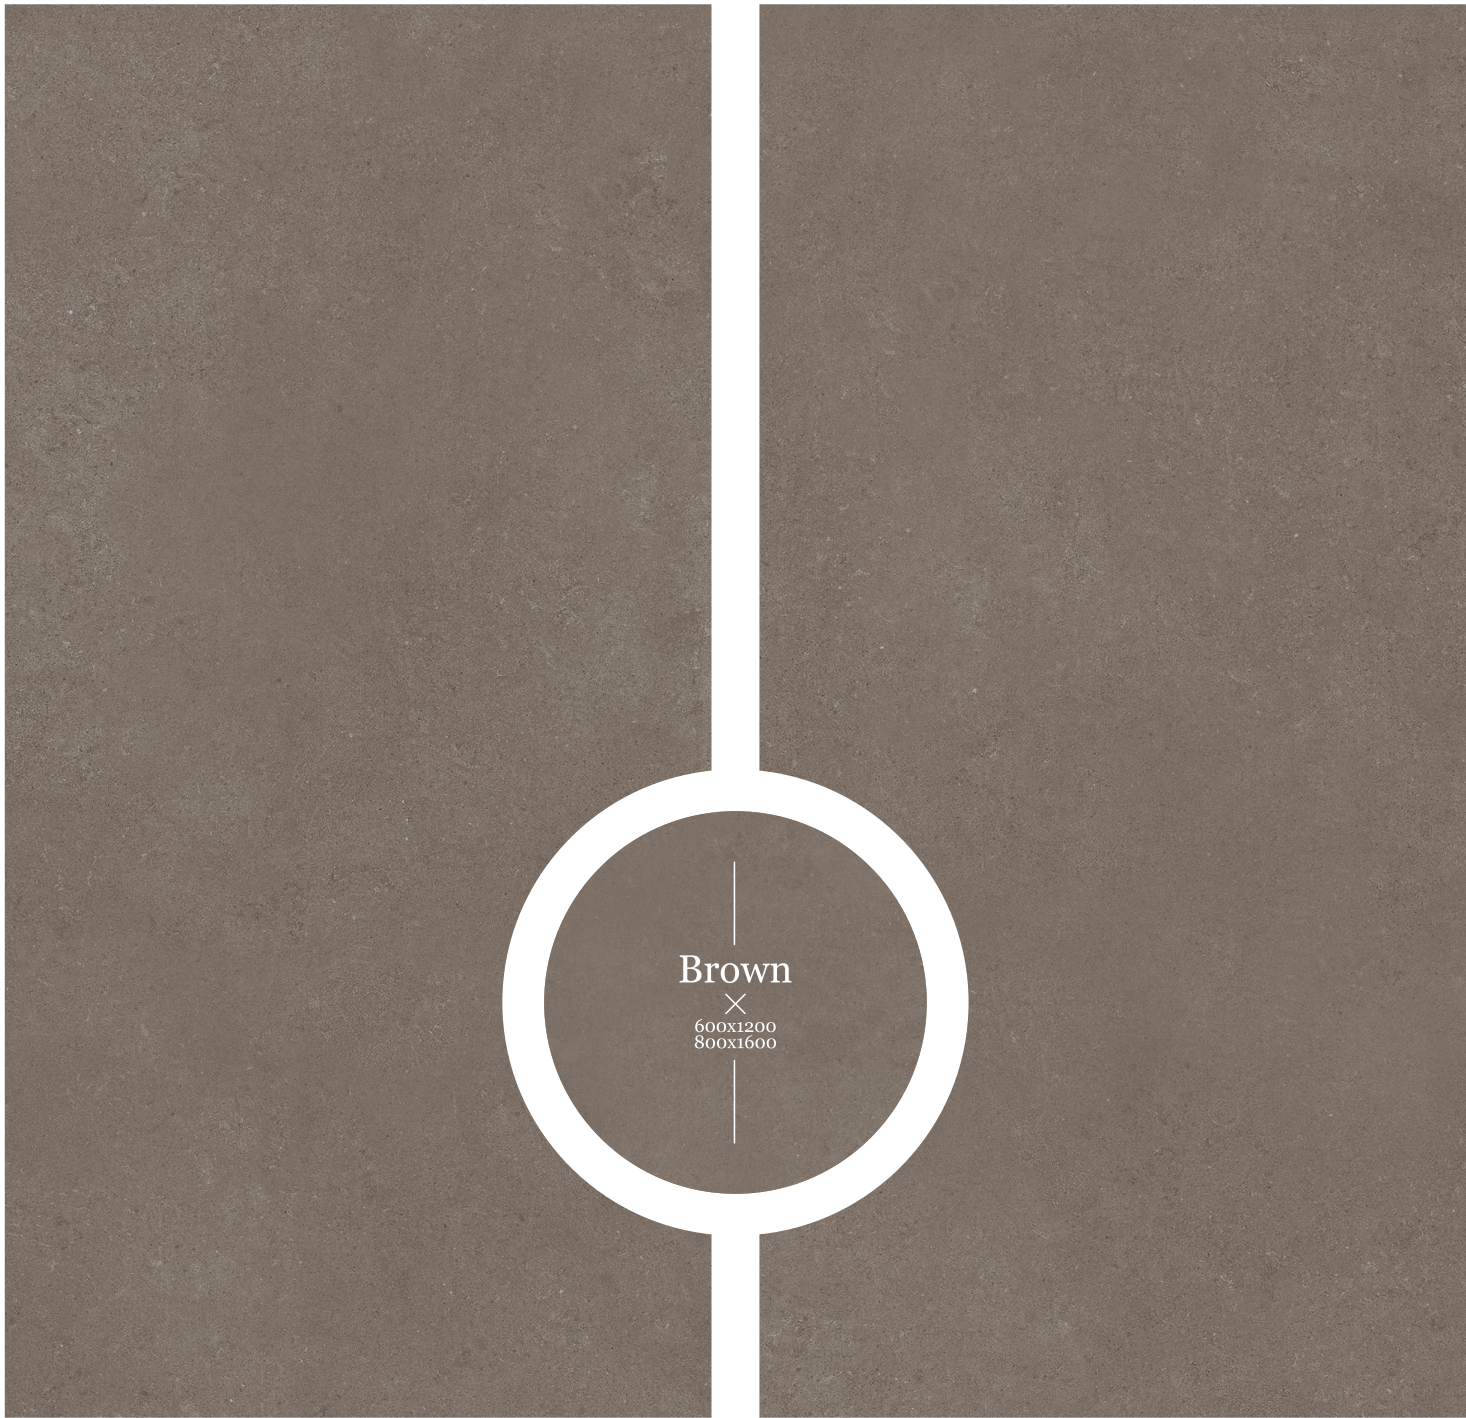




Brown
X
600x1200
800x1600

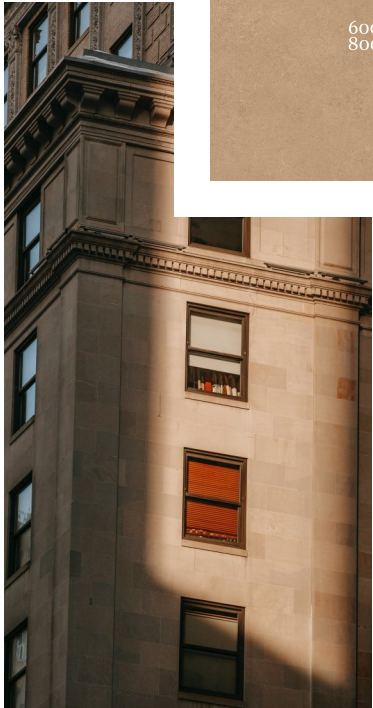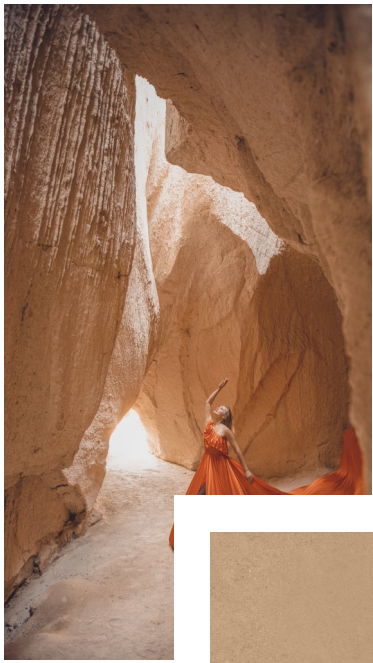


Camel
X
600X1200
800X1600

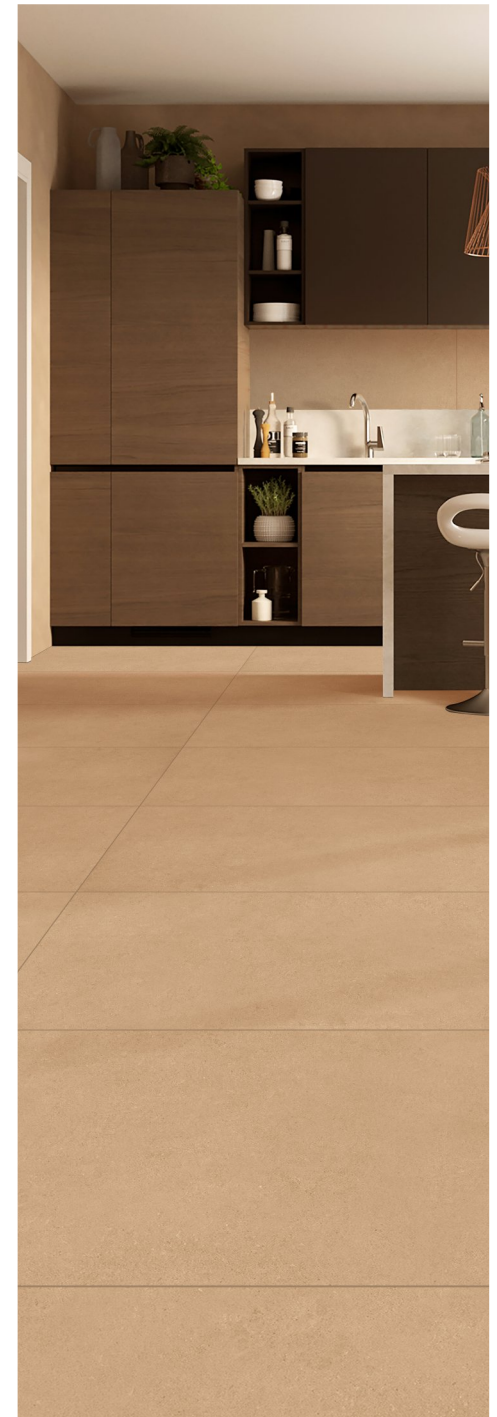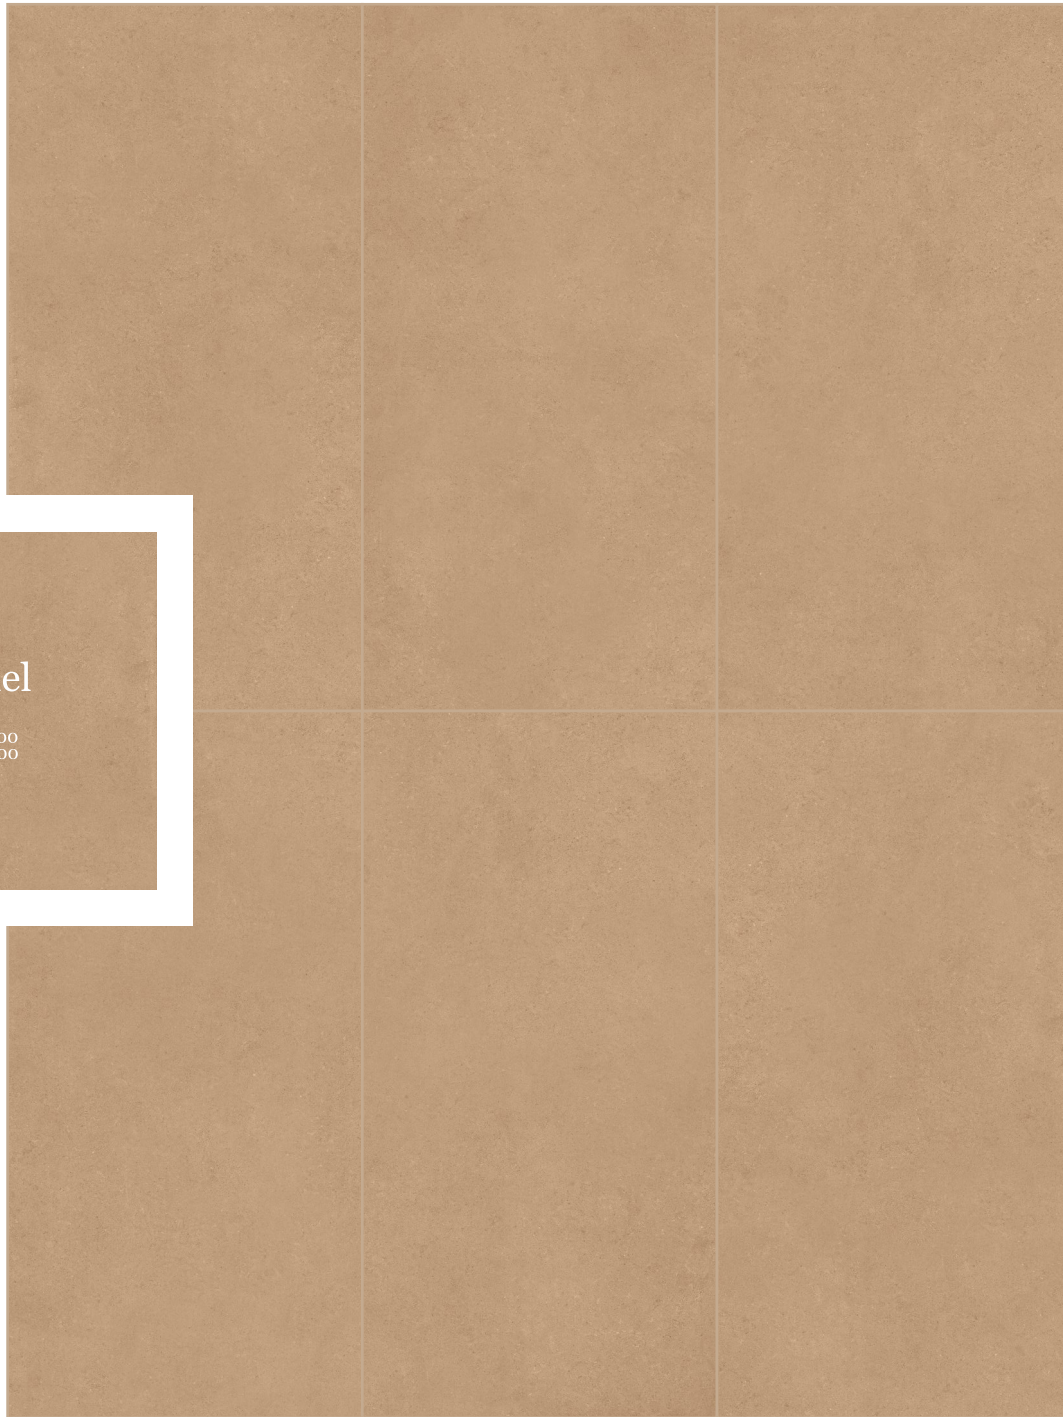




Camel
×
600x1200
800x1600

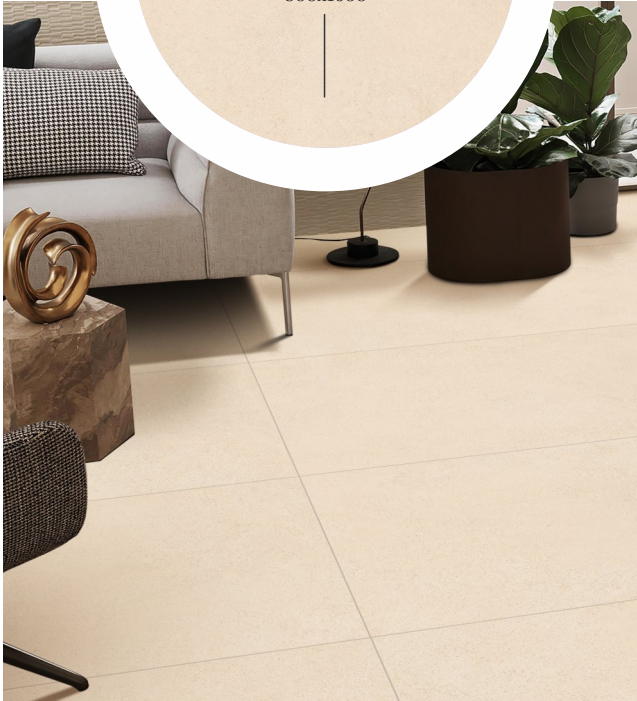



Crema
X
600x1200
800x1600

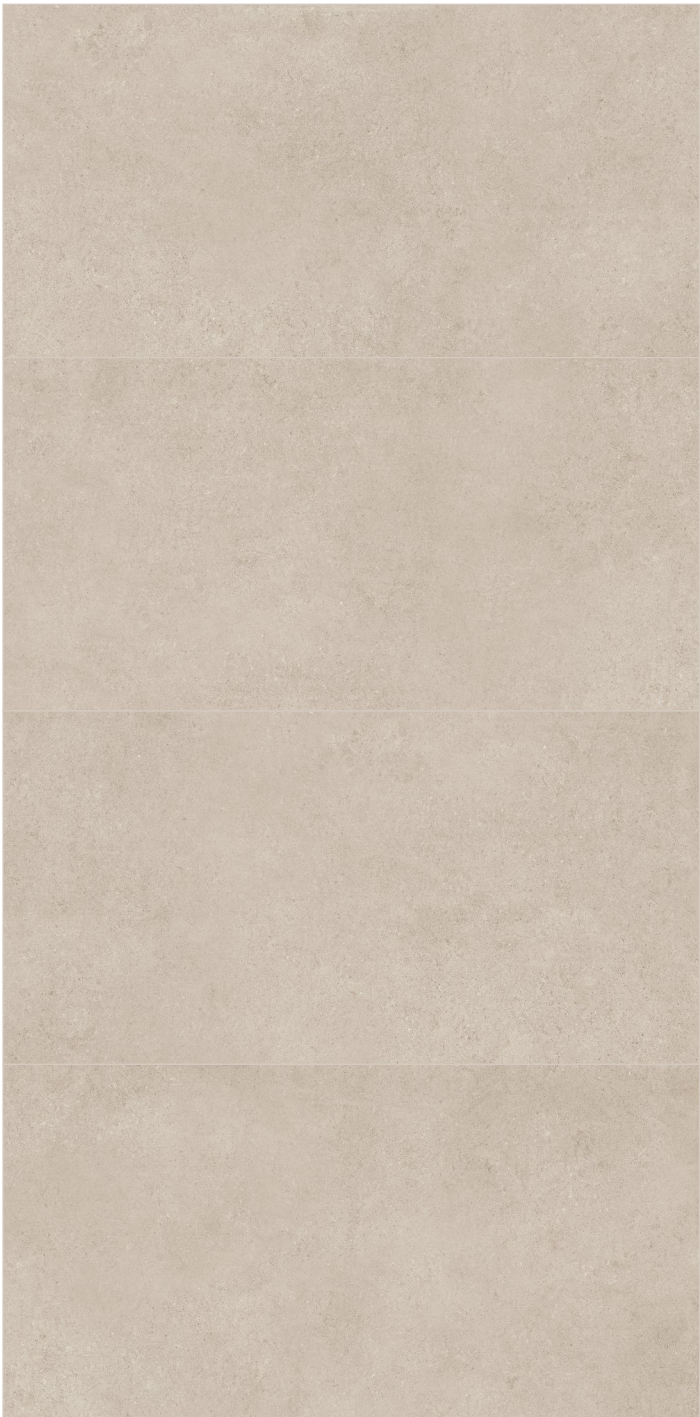



Marfil
×
600x1200
800x1600



beige chiaro

grigio



ocra

silver






Beige Chiaro
×
600x1200 | 800x1600

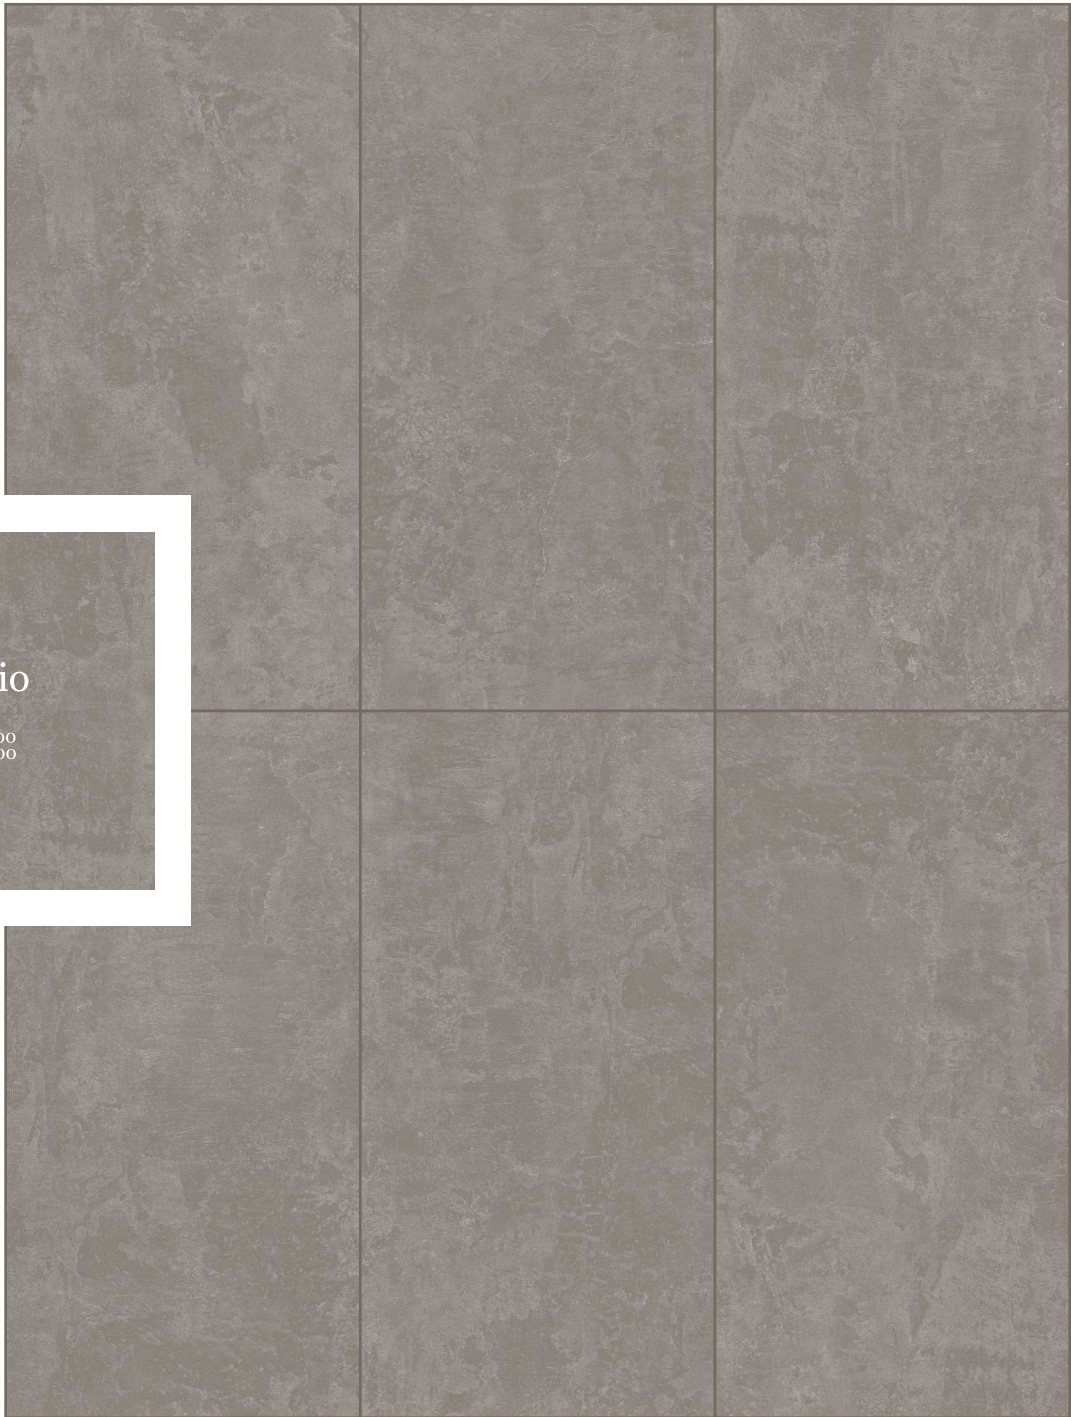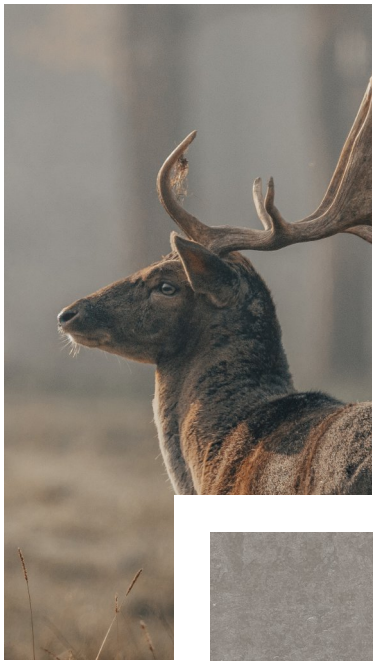



Grigio
X
600x1200
800x1600

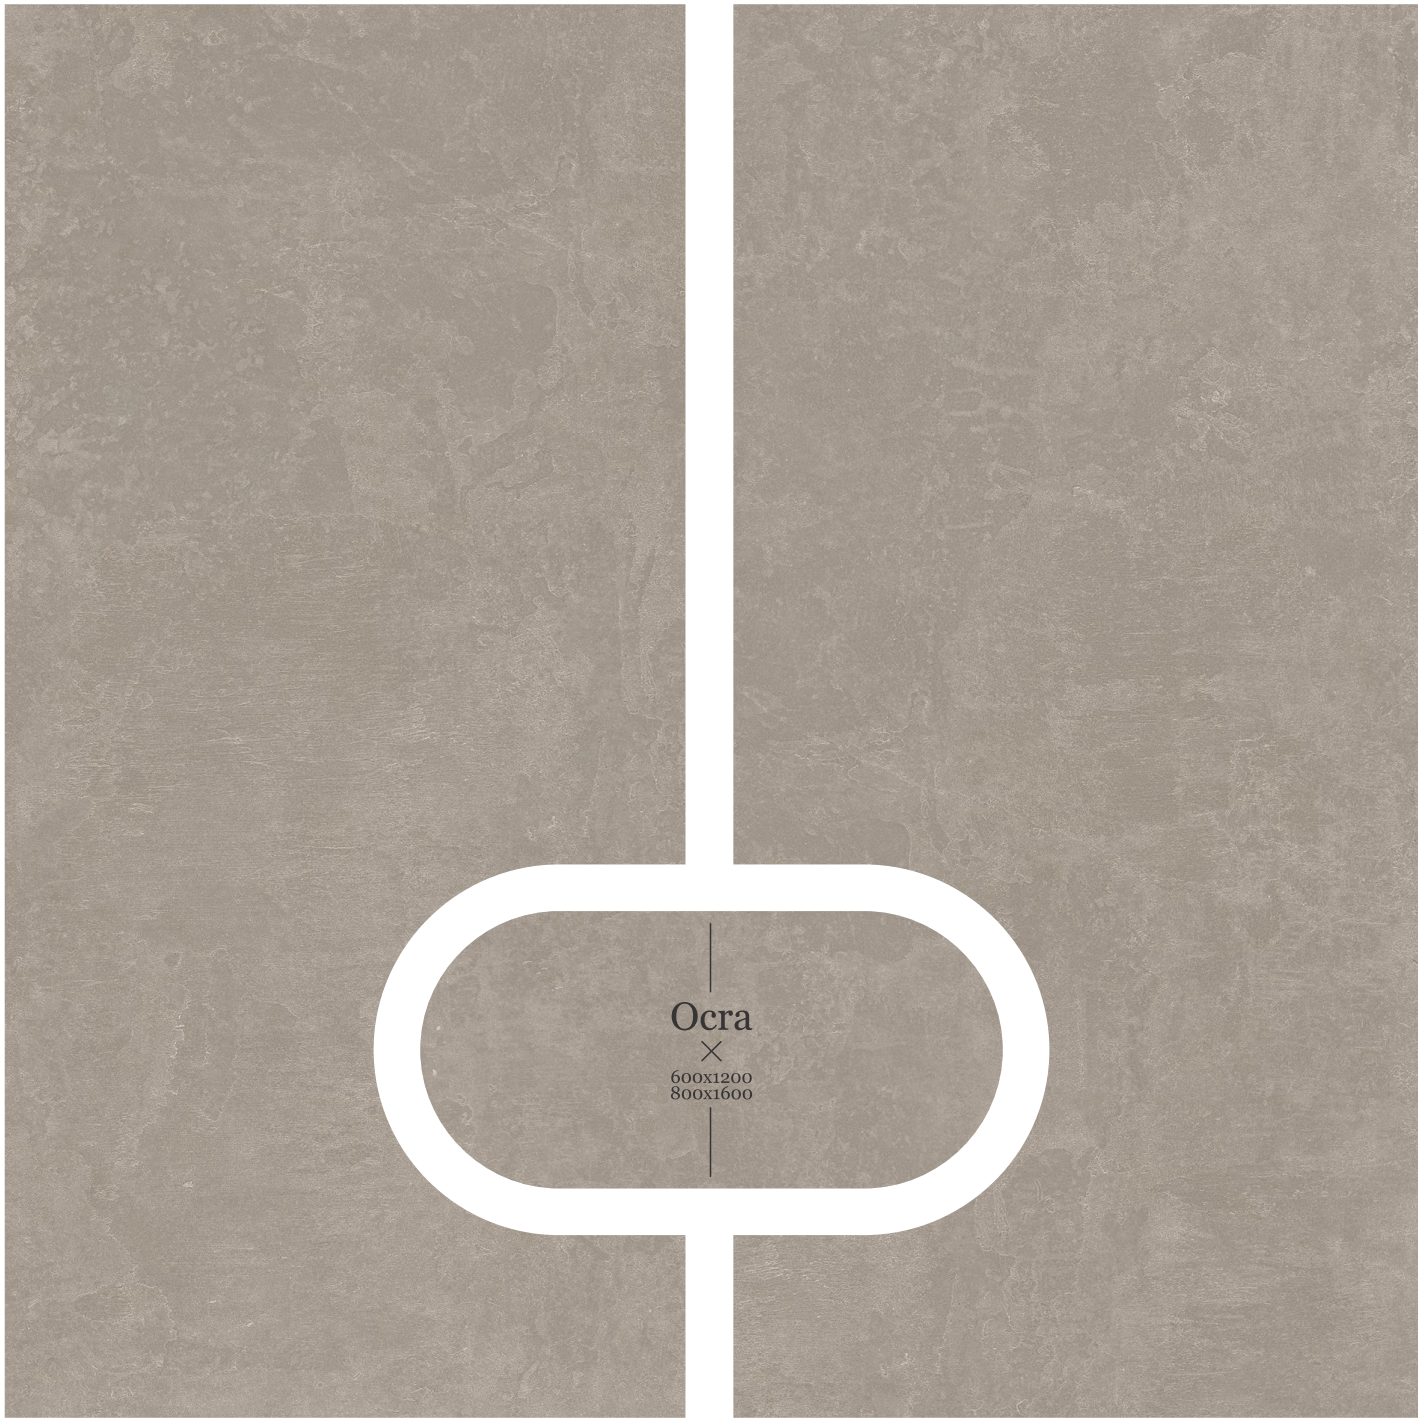

Odra

×

600x1200
800x1600






Ocra
X
600x1200
800x1600




Silver
×
600x1200

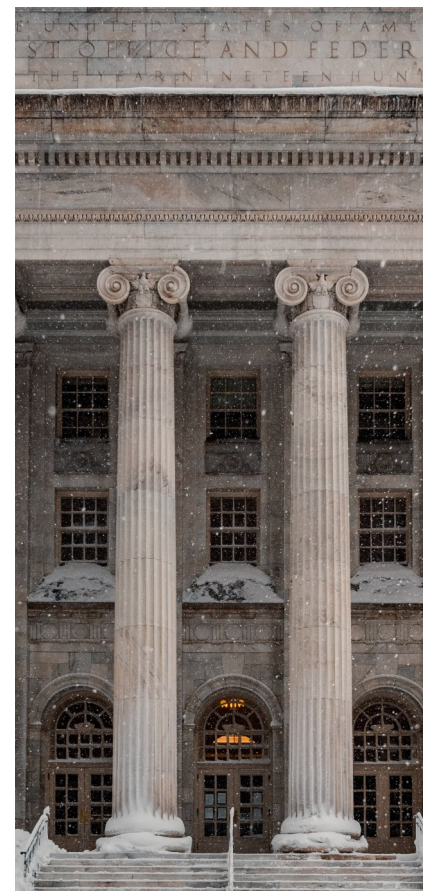



Silver
X
600x1200
800x1600

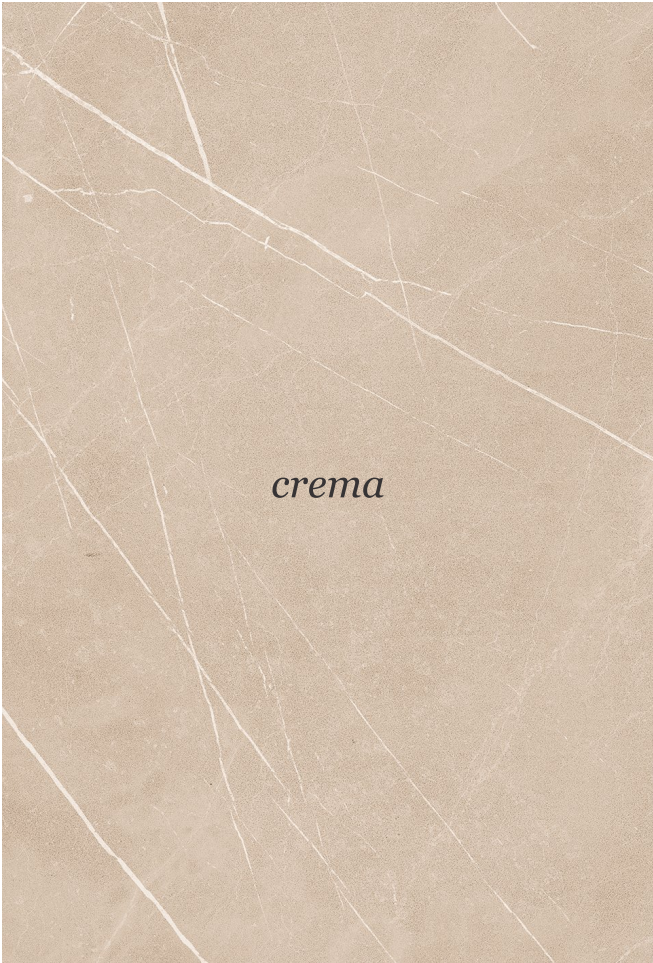


crema



grey



nero

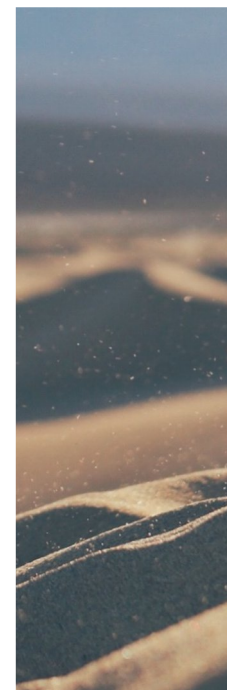




Crema
×
600x1200
800x1600




Grey
X
600x1200

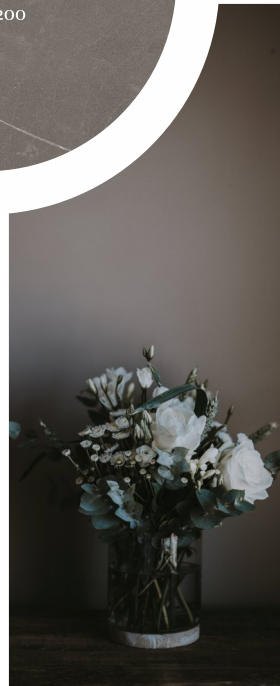






Grey
X
600x1200
800x1600


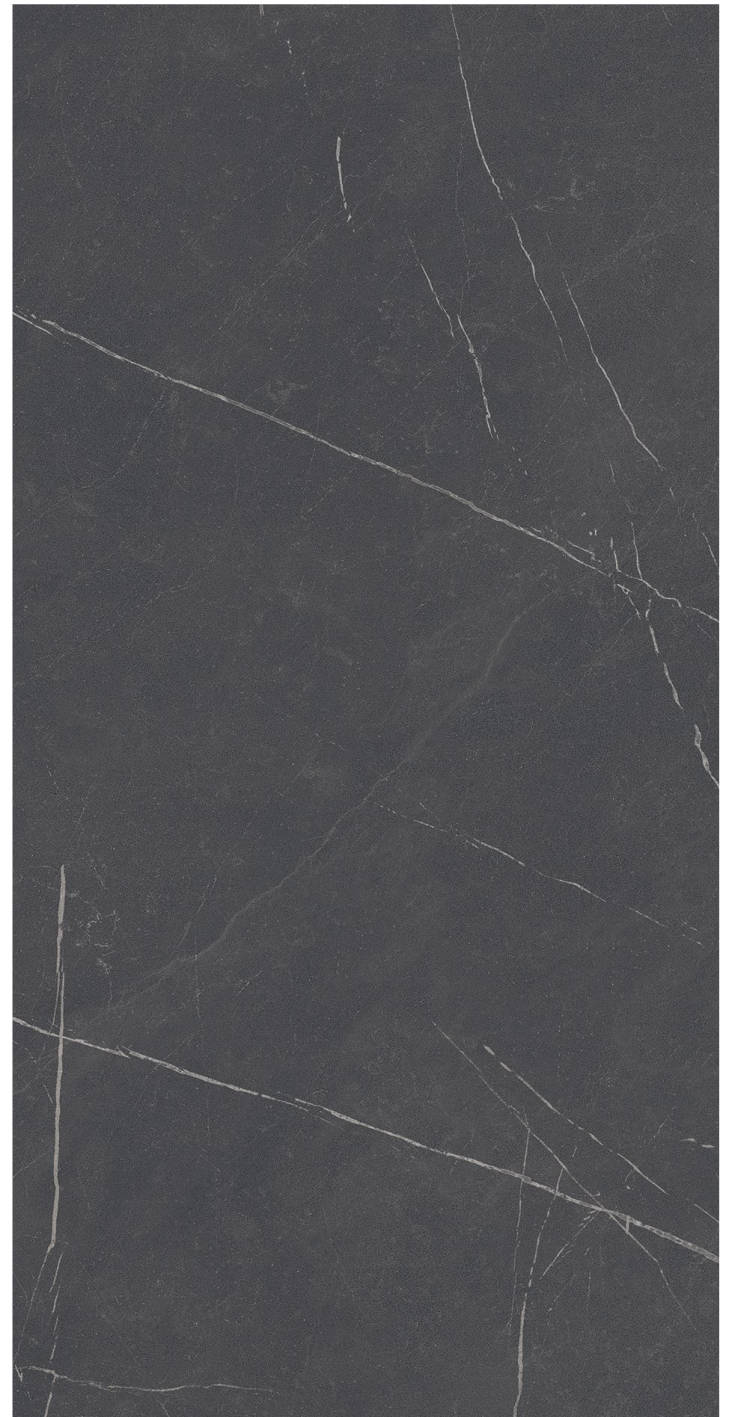




Nero
X
600x1200
800x1600



timber ambient
SERIES

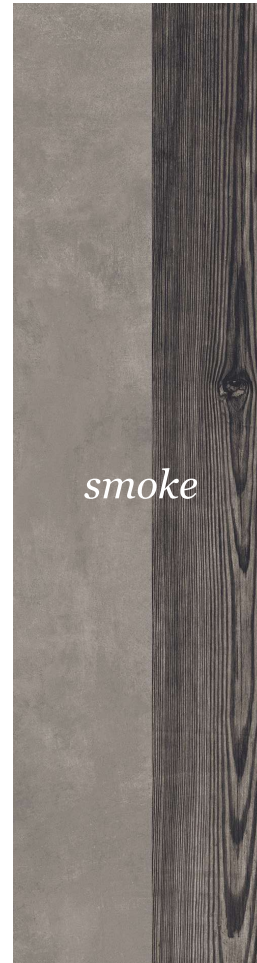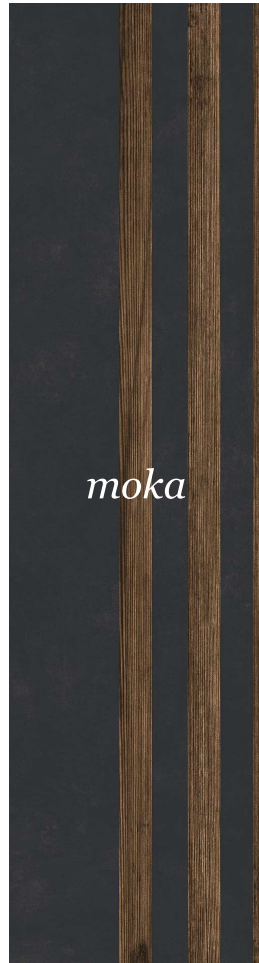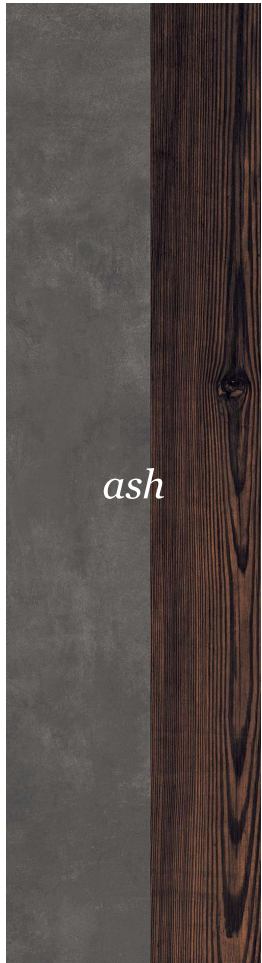

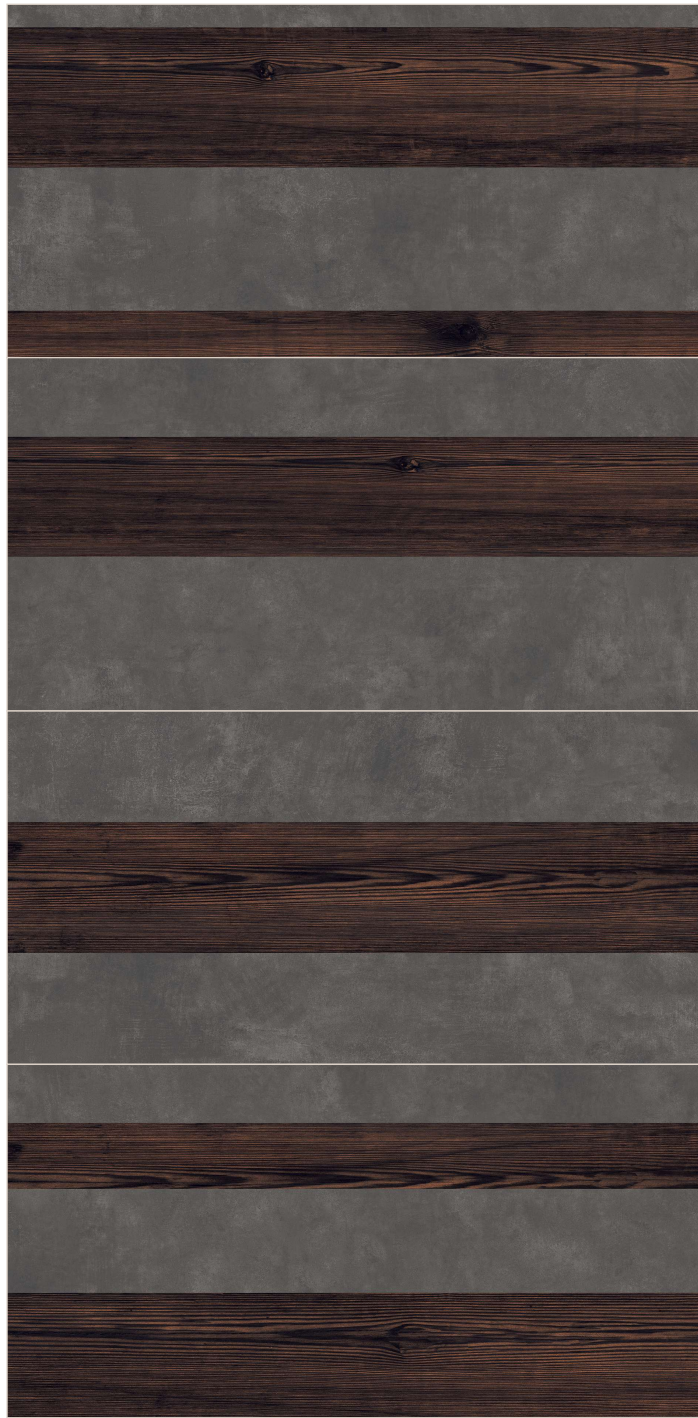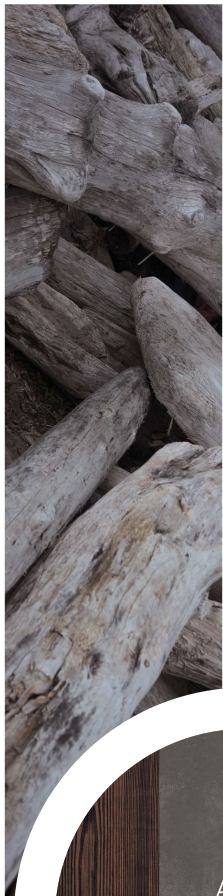




Ash
×
600x1200

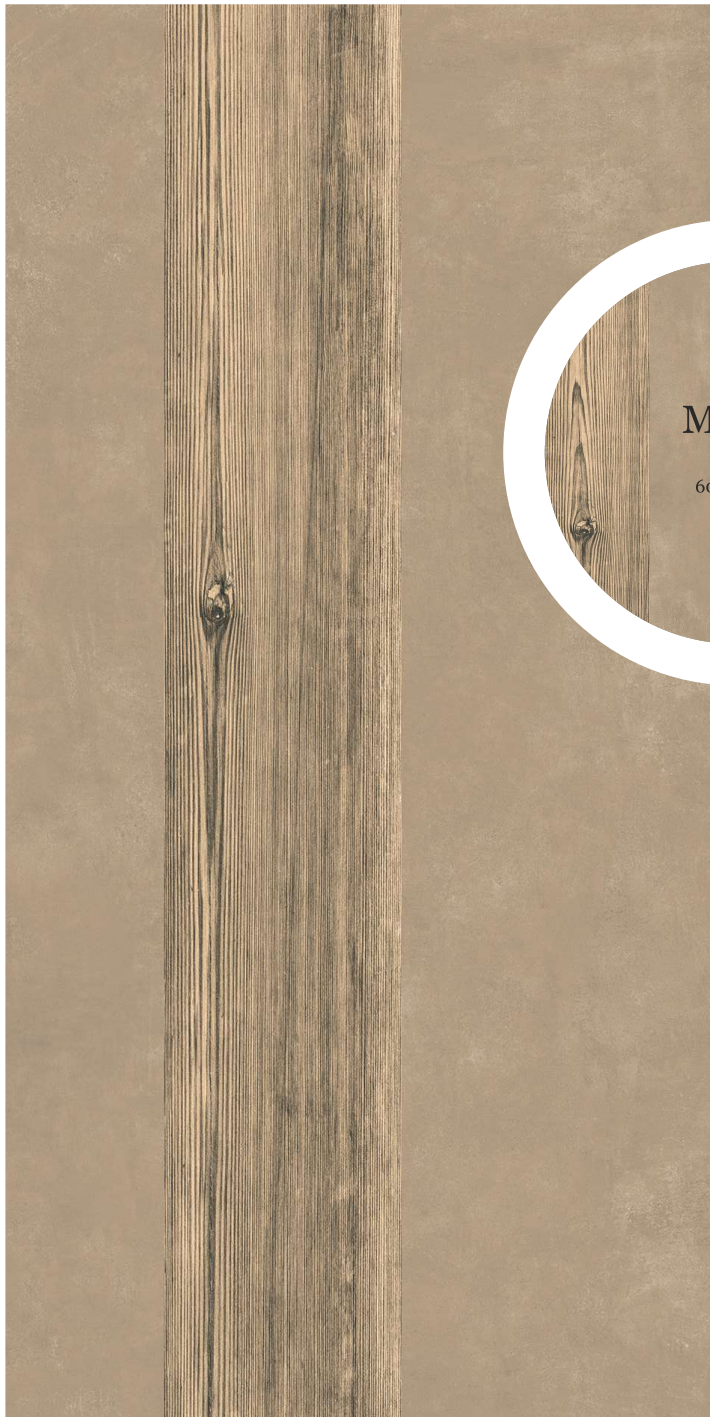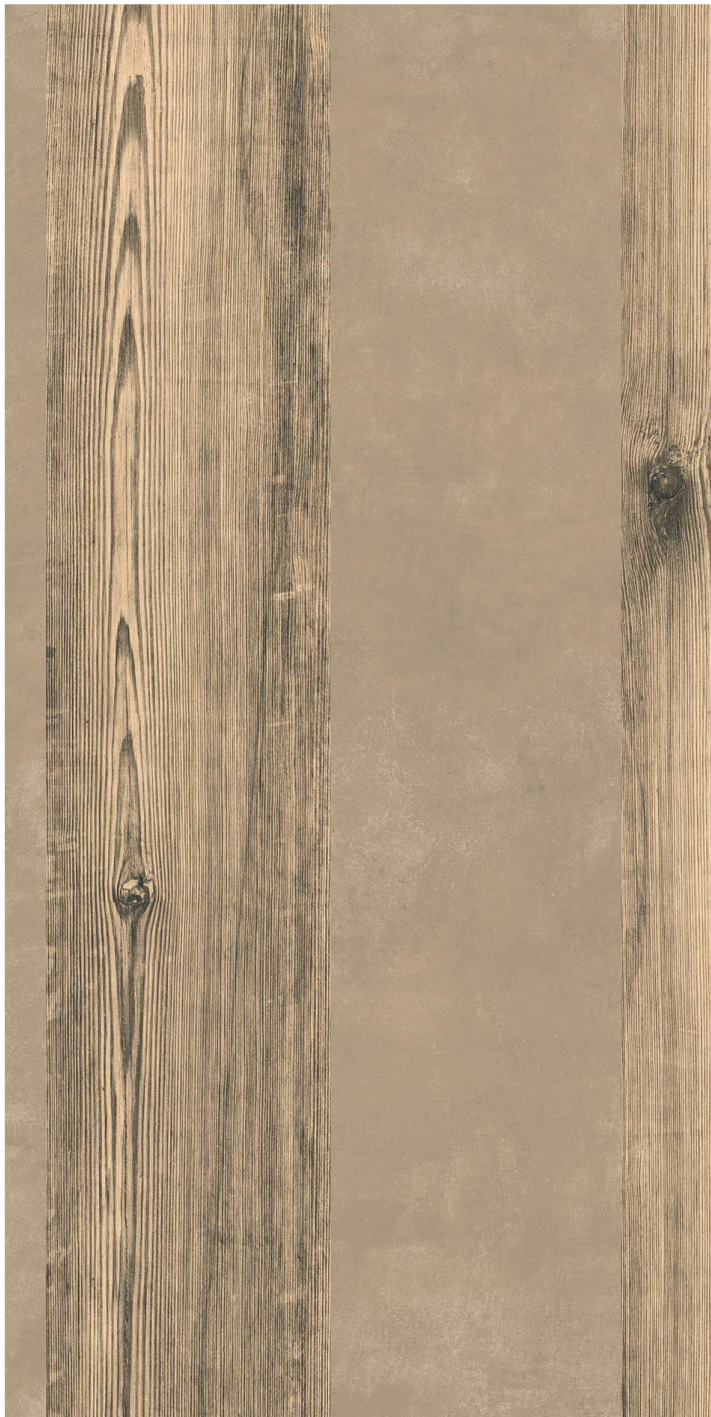




Maple
X
600x1200

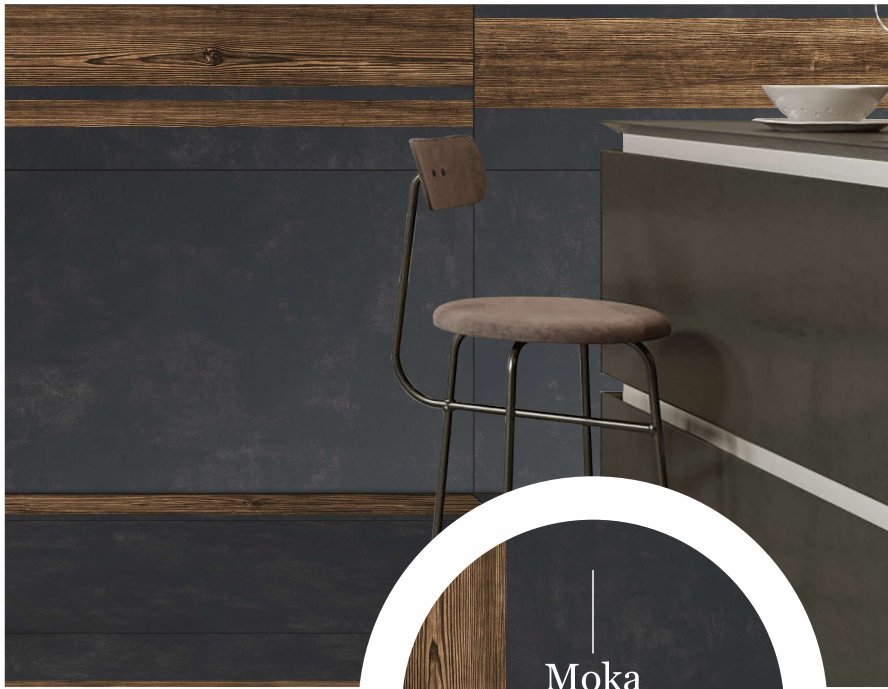

Moka
×
600x1200

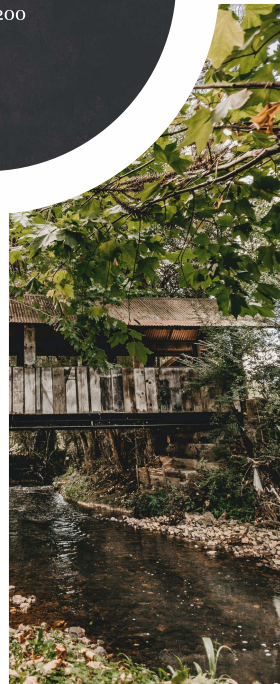



Moka
×
600x1200






Pearl
X
600x1200



LAVISH

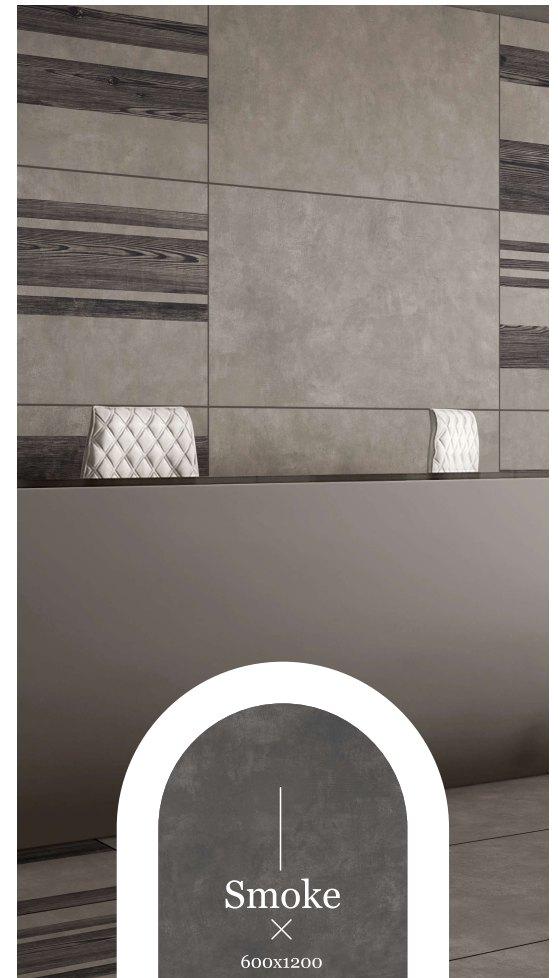


Smoke
×
600x1200






Smoke
X
600x1200

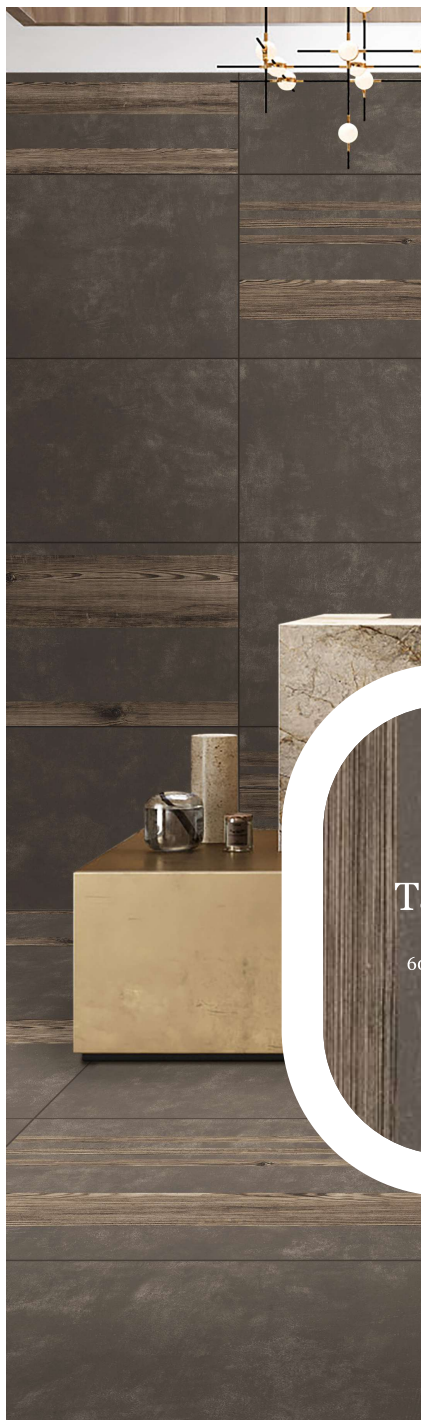

Taupe
×
600X1200



Taupe
X
600x1200

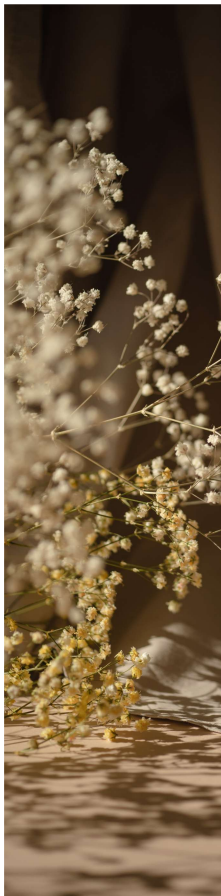

Walnut
×
600x1200





Walnut
X
600x1200

| QUALITY ITEMS | TECHNICAL FEATURE | STANDARD METHOD ISO | UNIT | REQUIREMENTS ISO 13006:2018 Ev ≤ 0.5% GROUP BIa | LAVISH Values | | | |
|--------------------------------------|---|---------------------|-------------------|--|--|--------|---------------|--------|
| | | | | | SIZE < 1200mm | | SIZE > 1200mm | |
| | | | | | % | mm | % | mm |
| DIMENSIONS AND SURFACE QUALITY | Width | ISO 10545 - 2 | mm | ± 0.3% | ± 0.1% | ± 0.8% | ± 0.1% | ± 1% |
| | length | ISO 10545 - 2 | mm | ± 0.3% | ± 0.1% | ± 0.8% | ± 0.1% | ± 1.2% |
| | thickness | ISO 10545 - 2 | mm | ± 5.0% | ± 4% | ± 0.5% | ± 4% | ± 0.5% |
| | Straightness of Side | ISO 10545 - 2 | mm | ± 0.3% | ± 0.1% | ± 0.8% | ± 0.1% | ± 1% |
| | Rectangularity | ISO 10545 - 2 | mm | ± 0.3% | ± 0.1% | ± 1.3% | ± 0.1% | ± 1.5% |
| | Surface Flatness | ISO 10545 - 2 | mm | ± 0.4% | ± 0.1% | ± 1.8% | ± 0.2% | ± 3% |
| | Surface Quality | ISO 10545 - 2 | - | A minimum of 95% of the tiles are to be free from visible defects which can impair the appearance of a major area of tiles | 95% | | | |
| PHYSICAL PROPERTIES | Water Absorption | ISO 10545 - 3 | % | ≤ 0.5% individual 0.6% | Avg ≤ 0.08% Individual 0.2% | | | |
| | Modulus of Rupture | ISO 10545 - 4 | N/mm ² | Min. 35, Individual Min. 32 | Min. 42 | | | |
| | Breaking Strength | ISO 10545 - 4 | n | Not less than 1300 | Min. 1800 | | | |
| | Moisture Expansion | ISO 10545 - 10 | mm/m | - | 0,02 | | | |
| | Mohs Hardness of surface | NA | - | - | 7 | | | |
| | Coefficient of linear thermal expansion from ambient temperature to 100°C | ISO 10545 - 8 | K ⁻¹ | As declared by the Manufacturer | 6x10 ⁻⁶ K ⁻¹ max | | | |
| | Thermal Shock Resistance | ISO 10545 - 9 | - | As declared by the Manufacturer | No damage | | | |
| | Crazing Resistance: glazed tiles | ISO 10545 - 11 | - | Required | No damage for Min. 10 Cycles | | | |
| | Bulk Density | ISO 10545 - 3 | g/cc | 2,2 | 2,2 | | | |
| | Impact Resistance | ISO 10545 - 5 | - | As declared by the Manufacturer | 0,55 | | | |
| | Frost Resistance | ISO 10545 - 12 | - | As declared by the Manufacturer | No change | | | |
| | Small color differences | ISO 10545 - 16 | - | Plain colored tiles only where required GL: ΔE < 0.75 UGL: ΔE < 1.0 | No change | | | |
| CHEMICAL PROPERTIES | Resistance to staining | ISO 10545 - 14 | Class | Minimum Class 3 | Class 4 | | | |
| | Resistance to household chemicals & swimming pool salts | ISO 10545 - 13 | Class | Minimum B | Compliant | | | |
| | resistance to acids & alkalis | ISO 10545 - 13 | Class | As declared by the Manufacturer | Compliant | | | |



LAVISH GRANITO PVT.LTD

Halvad Road, At. Unchi Mandal, Dist. Morbi - 363 642 (Gujarat) India.
+91 99786 00408/409 | info@lavishceramics.com | www.lavishceramics.com