



LAVISH
WALL | VITRIFIED | DOUBLE CHARGE



LAVISH GRANITO PVT. LTD.

Halvad Road, At. Unchi Mandal, Dist. Morbi - 363 642 (Gujarat) INDIA.
+91 99786 00408/409 | info@lavishceramics.com | www.lavishceramics.com

GLAZED PORCELAIN TILES

60X120cm | 80x80cm | 60x60cm | 30x60cm

www.lavishceramics.com



600x1200mm | 800x800mm | 600x600mm | 300x600mm



Since the past couple of decades 'Lavish' has exceeded expectations in providing innovative products to all its customers with really one of a kind accumulation of tiles and a remarkable pledge to Customer Service that provides finesse, style and quality.


'Lavish' has advanced to wind up one of the biggest ceramic manufacturers in India and its accumulations are a wonderful mix of most excellent designs covering walls & floors of both indoors & outdoors. Accompanied by ISO 9001 certified methods of production that provide quality, Lavish Group is also known as one of the largest producers of tiles in India. Our supreme quality is a result of a leading-edge 21st-century production process that includes high-end machinery, quality control process, research and development as well as automation. We are always excited to provide designs that suit your choice so go through our splendid gallery and choose us to perform your genuine decor upliftment!



**Witness Melange of
Strength & Beauty**



• AVAILABLE SIZES •

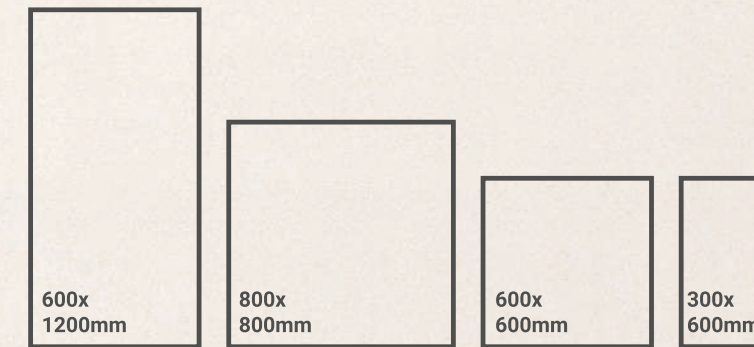

Glazed Porcelain Tiles
Grès Cérame Emailé
Gres Porcellanato Smaltato
Gres Porcelánico Esmaltado
Glasierte Feinsteinzeug

Decor trends are assimilating into the mainstream with alarming speed and so Lavish has once again come up with groundbreaking compilation. As you already know that Lavish group is renowned for manufacturing tiles that provides style, vogue and quality standard, we have furthermore upgraded our collection with some modernistic designs and a tint of creativity. Be it a home or a corporate office our range of products will surely confound you and put you into a puzzle of selection.

Behold our latest collection of extraordinary tiles which we have crafted by keeping in mind the latest trend. With a wide range of tiles, Lavish wants you to add that unimagined degree of magnificence to your place.

www.lavishceramics.com



“

Have A Good Approach to your Living Style!



LAPATO FINISH



“

Simplicity
is a forever
classic



GLAZED PORCELAIN TILES


DIAMOND BIANCO

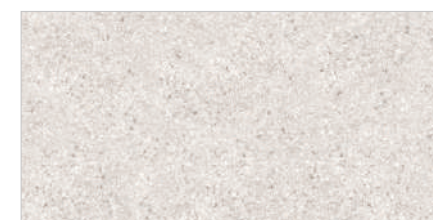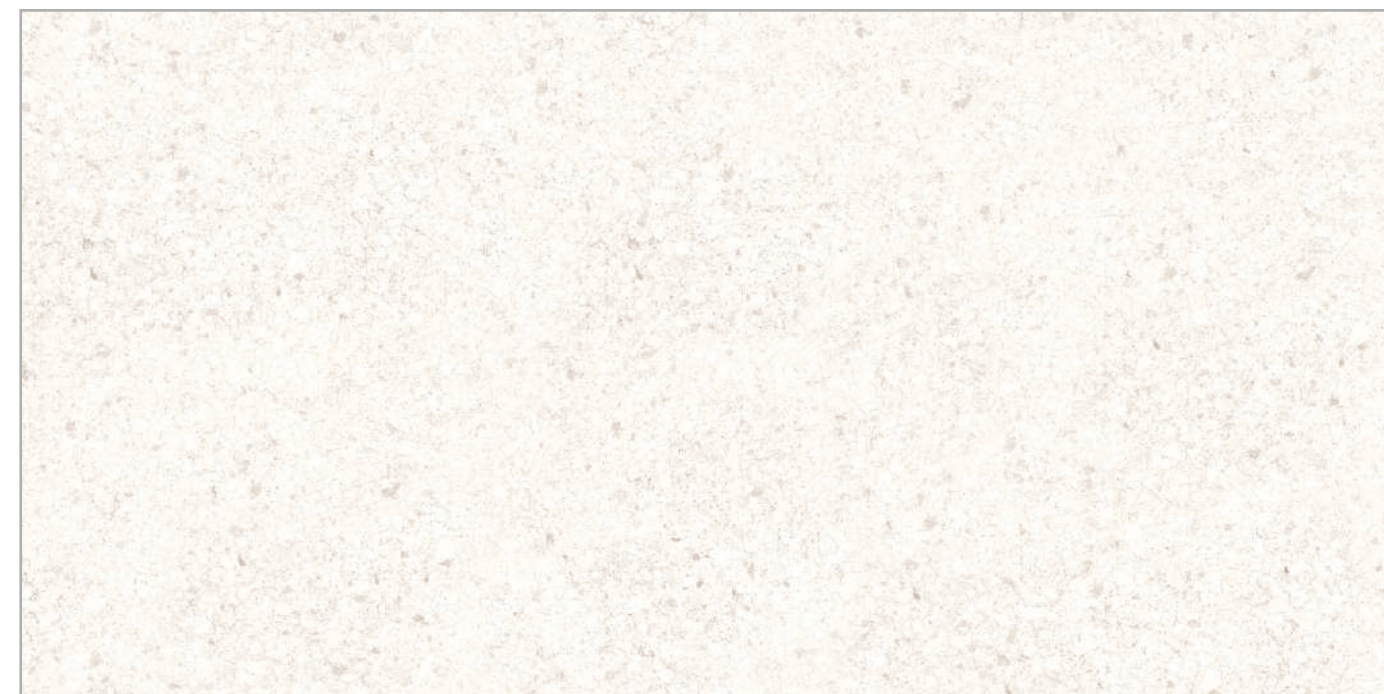

GREY




GRIS

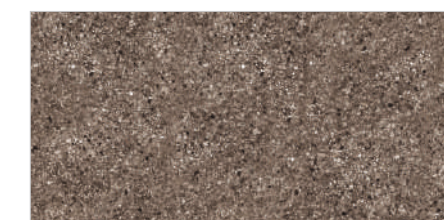

NERO

Available Sizes Of

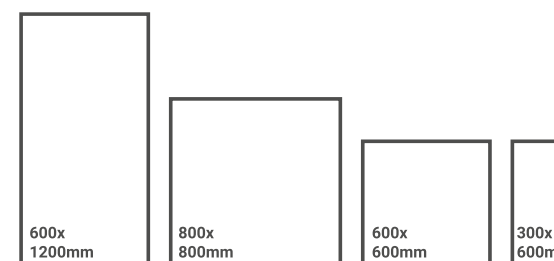


ATTIC BIANCO



GREY



CREMA

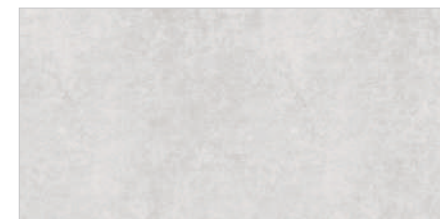

SEA STONE GREY




GRAFITO



BIANCO




CAFFE



CREMA


Available Sizes Of

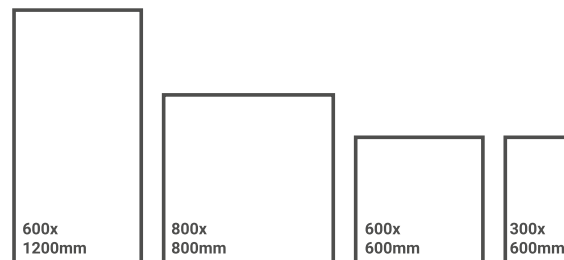



GLAZED PORCELAIN TILES


MARINA GRAFITO

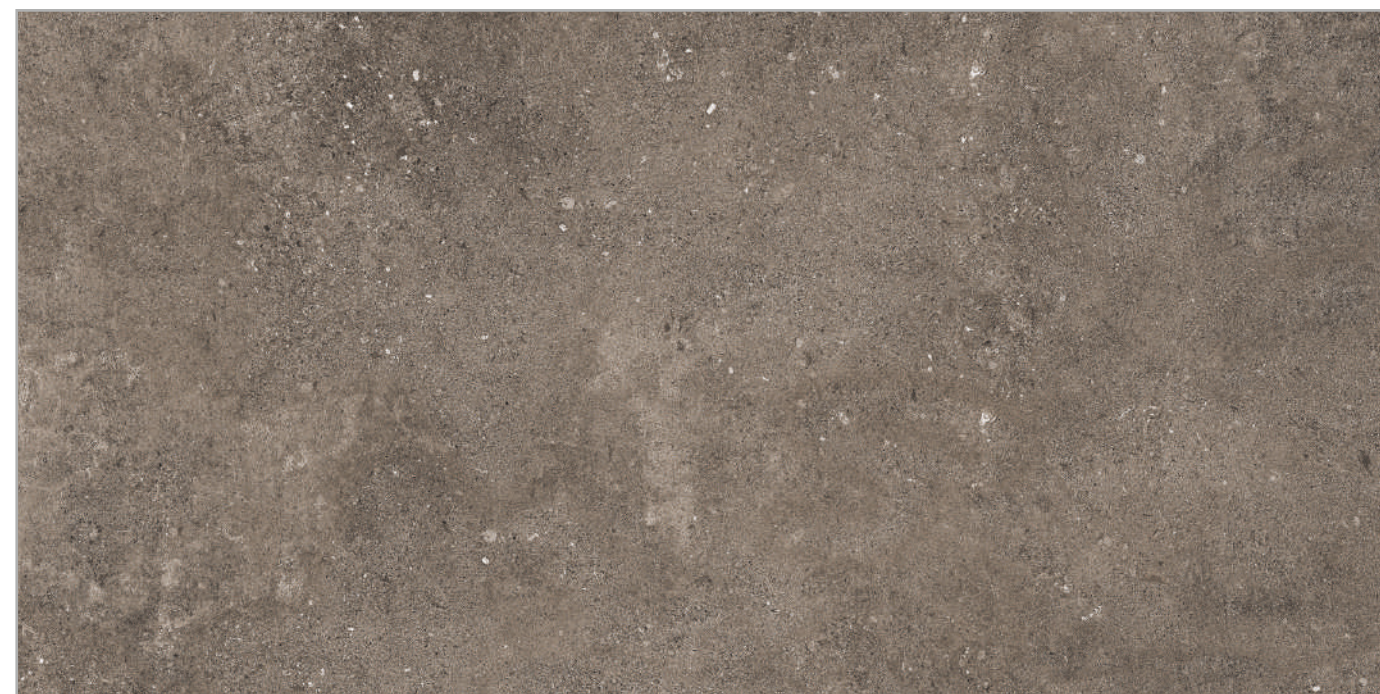

BROWN




GRIS

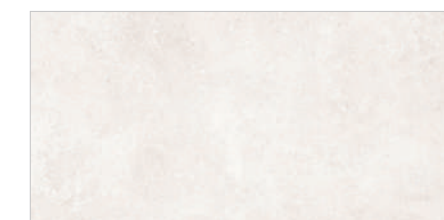

BIANCO

Available Sizes Of

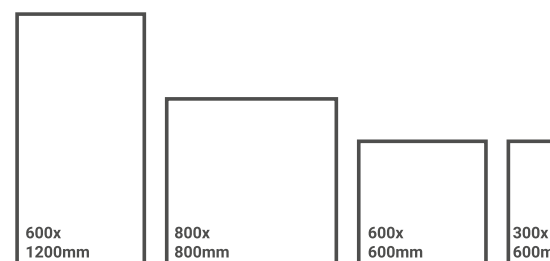

“

Crown Your Abode with Magnificence



SUGAR FINISH

“

Let your
imagination
and our art meet!



GLAZED PORCELAIN TILES

BONITA BIANCO




BLUE



BROWN




CREMA

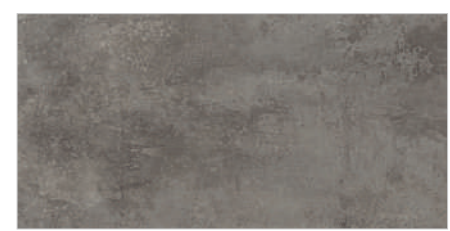


GREY


Available Sizes Of

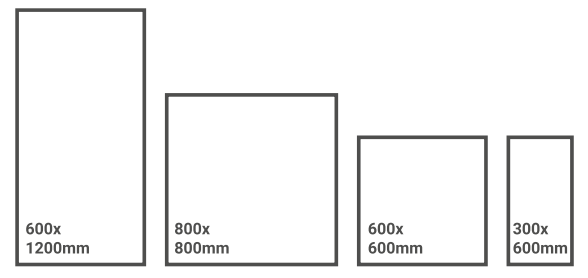

JEANS BLUE

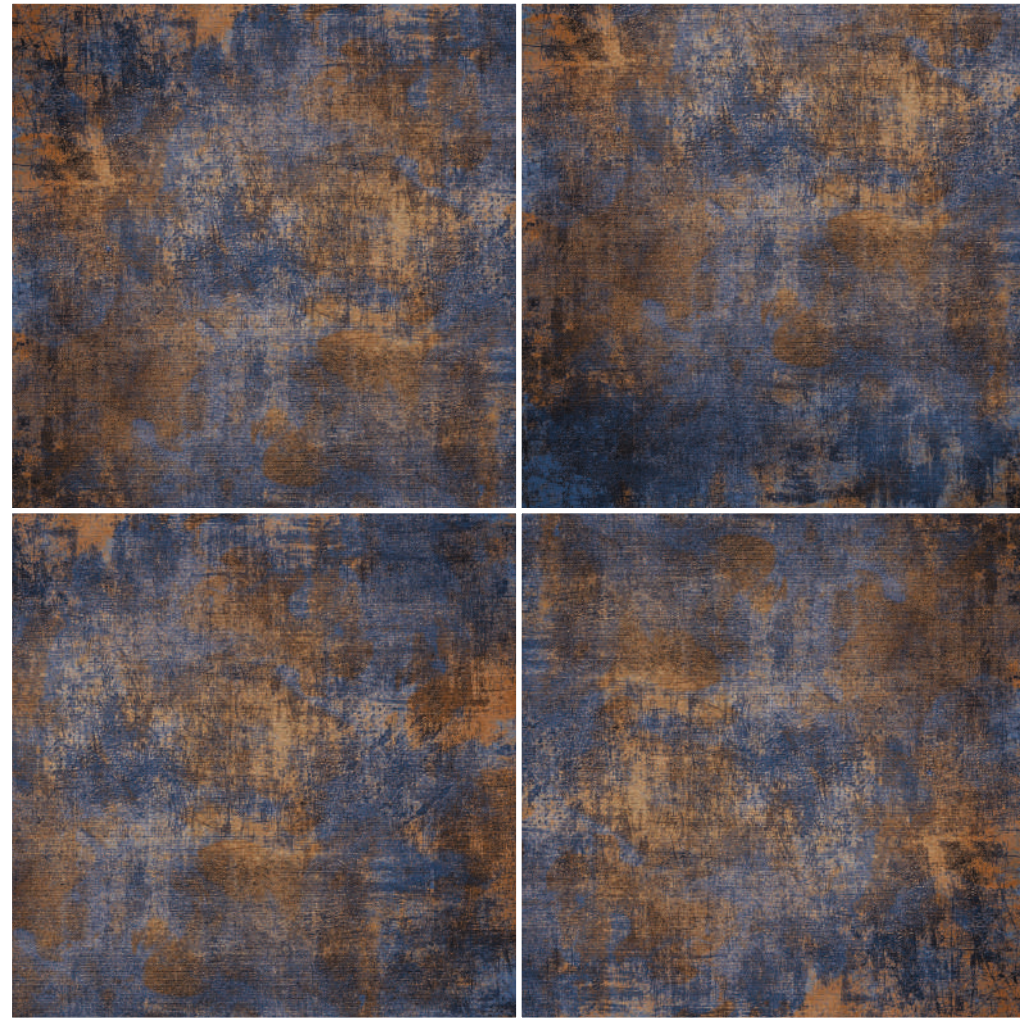


HELEN BROWN

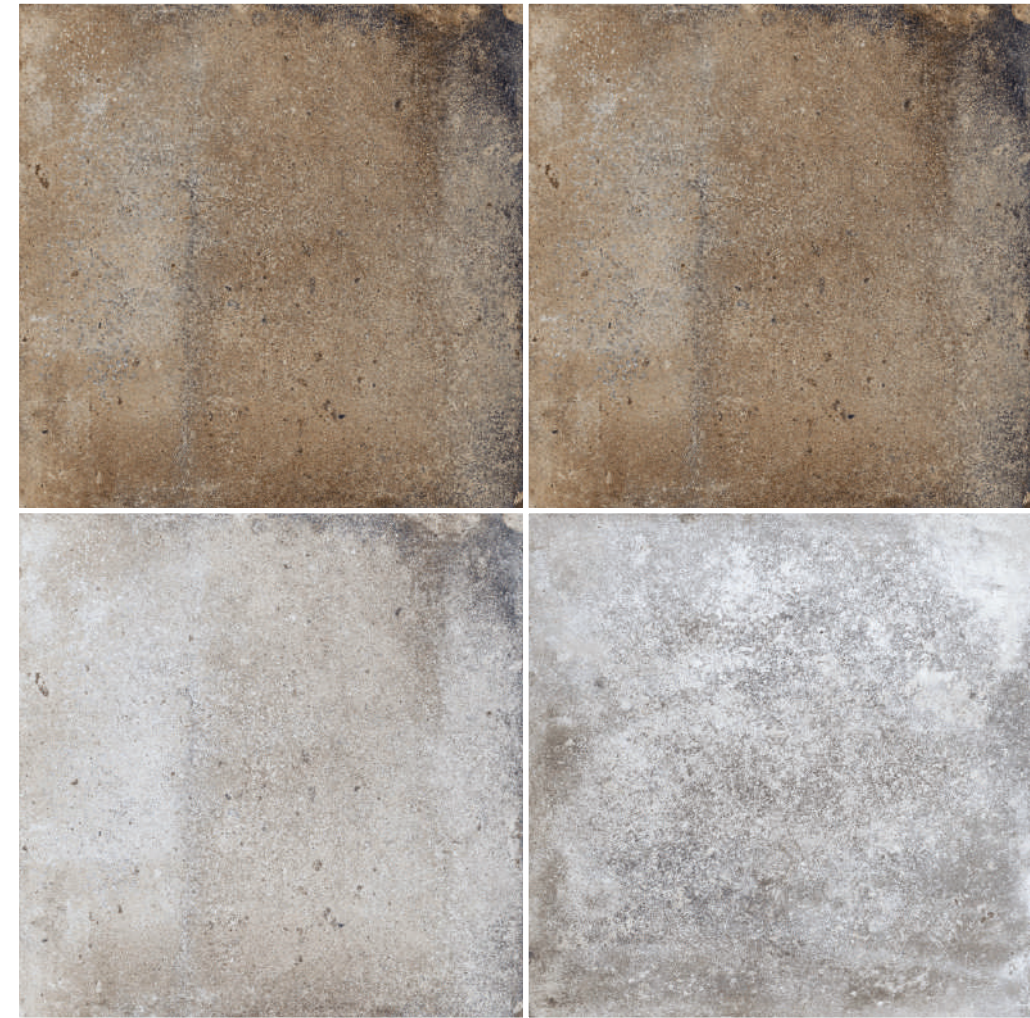

CREMA


Available Sizes Of

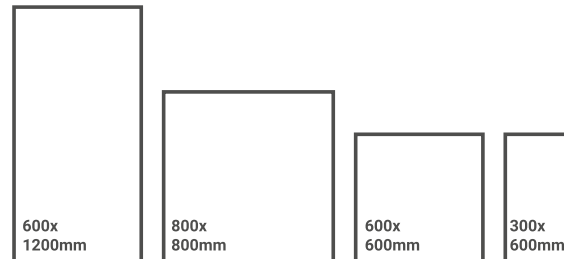




GLAZED PORCELAIN TILES

OXIDO

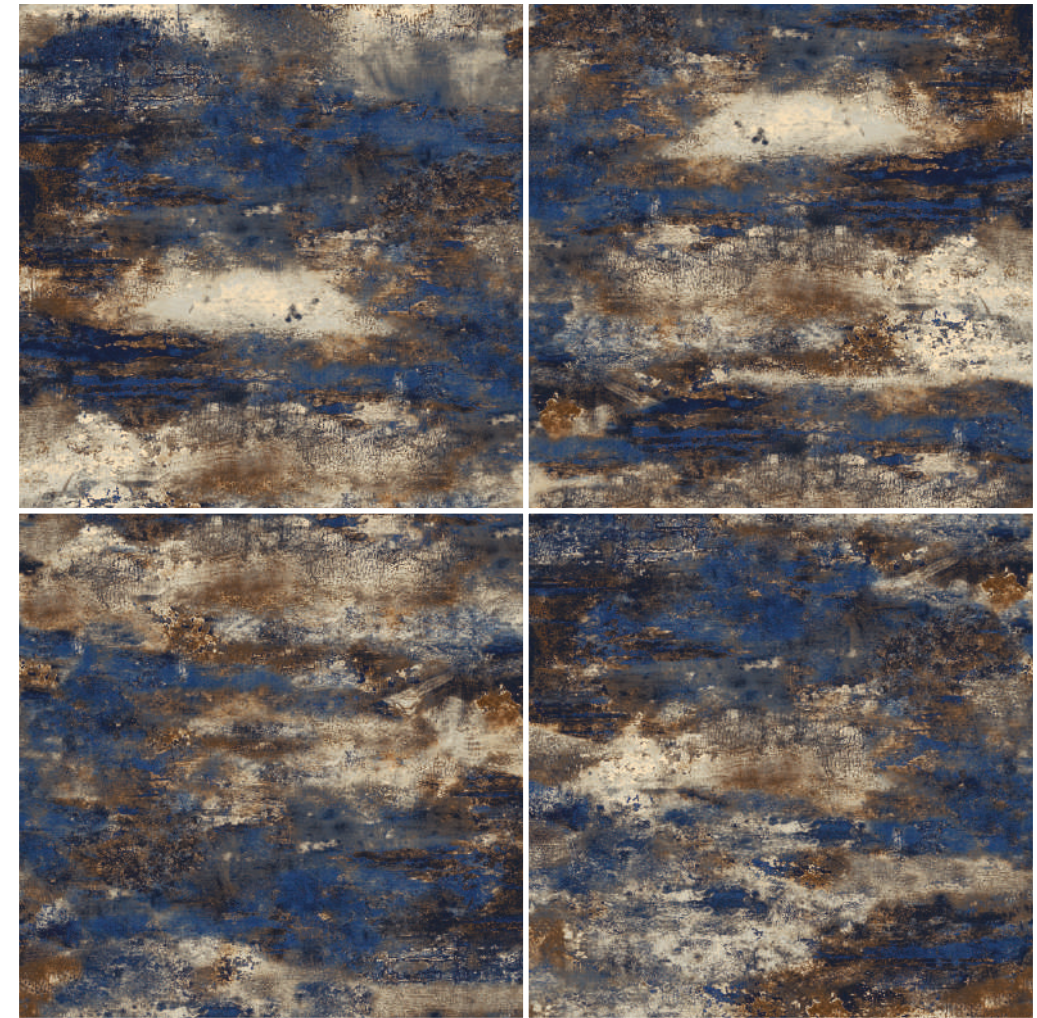

Available Sizes Of

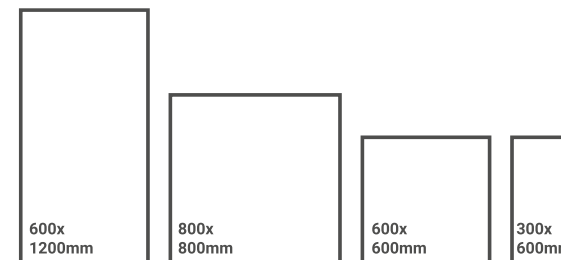




GLAZED PORCELAIN TILES

HOLZA BLACK



WHITE


Available Sizes Of

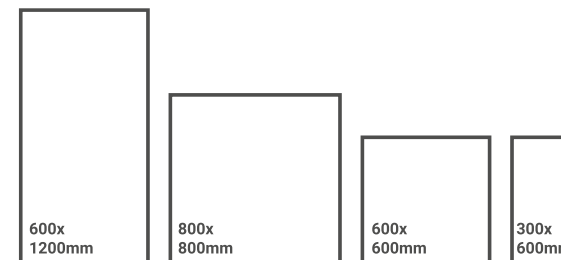

GLAM WHITE




BANGKOK GREY

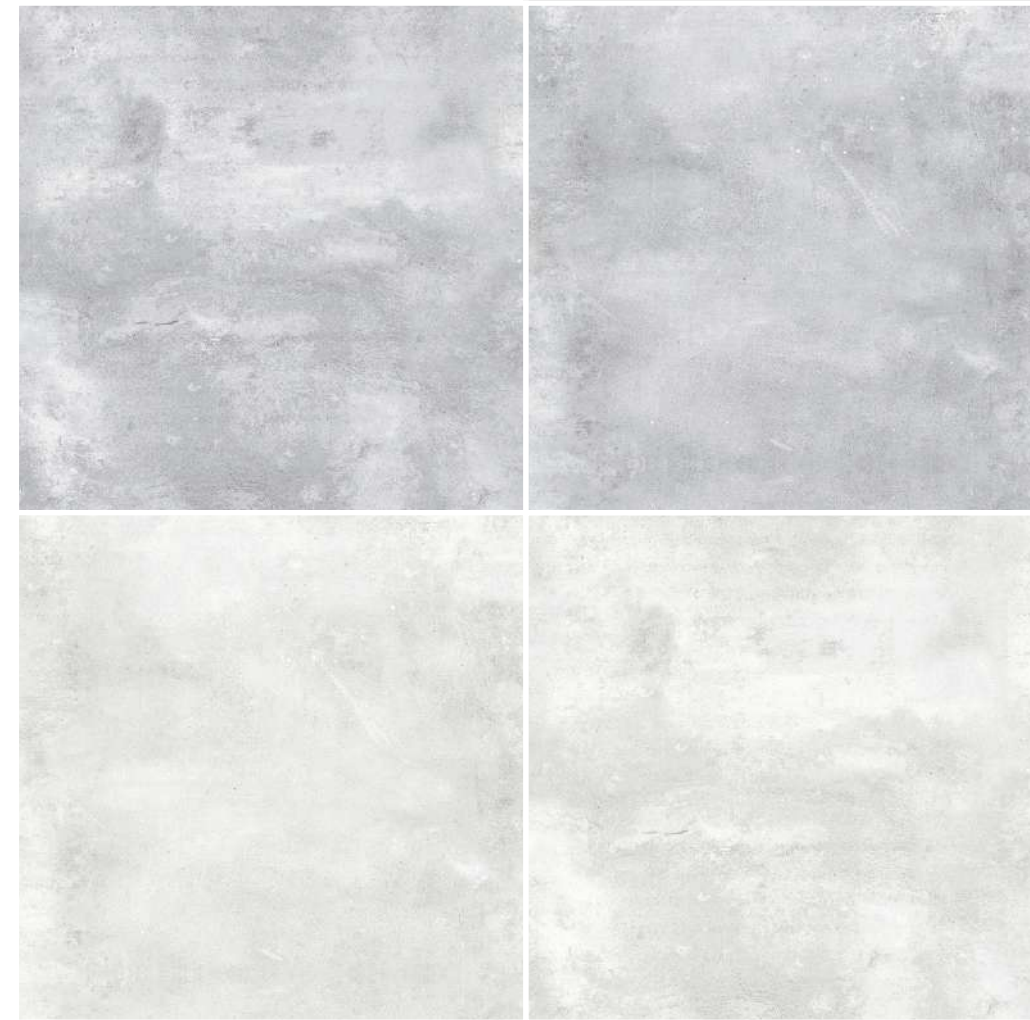


GREY

Available Sizes Of

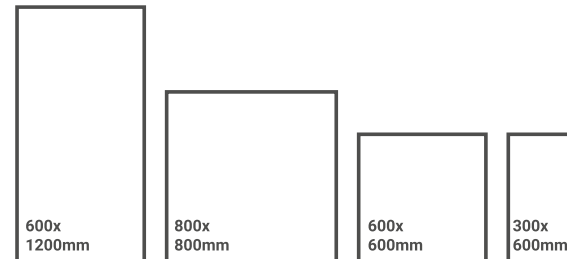


NIKON BLACK

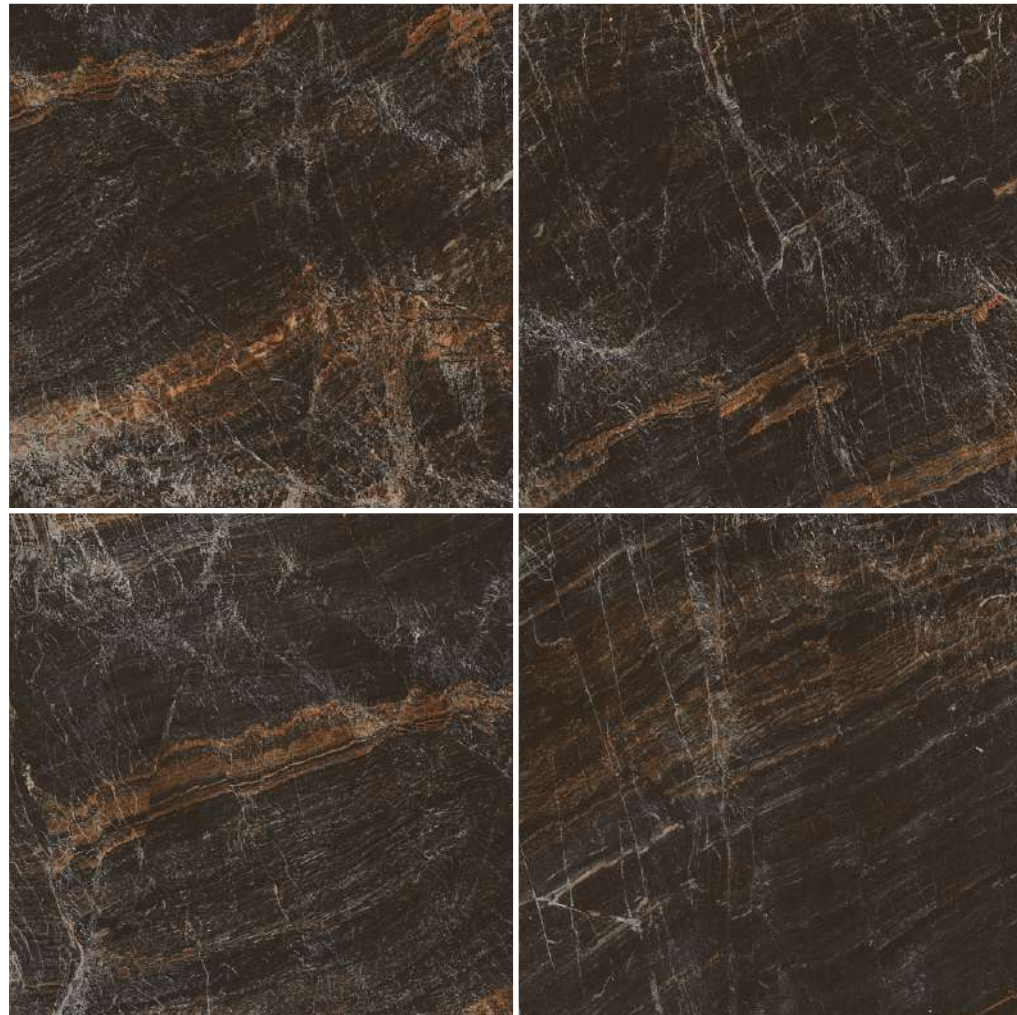

FLUENCE SATVARIO



Available Sizes Of

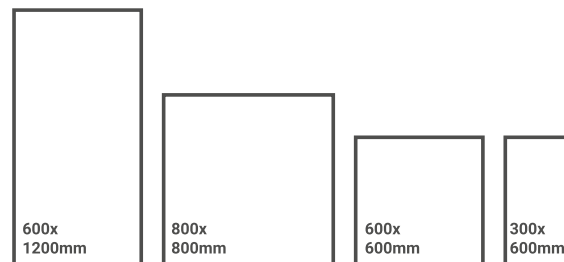



**Crown Your
Abode with
Magnificence**



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006 / En14411 GROUP Bla	LAVISH VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5%	± 0.3%	ISO-10545-2
Deviation in thickness	± 0.5%	± 4.0%	ISO-10545-2
Straightness in side	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Color difference	Unlterned	No change	ISO-10545-16
Glossiness	As per mfg.	Min 90 %	GLOSSO METER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of repture	Min. 35 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 1800 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Resistance to surface abrasion (PEI RATING)	As per mfg.	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg.	Min. 5	EN 101
THERMO HYGROMRTRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion(COE)	Max. 9.0x10 ⁻⁶	Max. 6.5x10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Min. Class 3	Class 5	ISO-10545-14
SEFETY PROPERTIES			
Slip resistance	As per mfg.	> 0.40	ISO-10545-17
Fire resistance	As per mfg.	Fireproof	N.A.
Lead & Cafmium given off by glazes tiles	As per mfg.	Does not yield Pb & Cd	ISO-10545-15

PACKING DETAILS

Size	600x1200mm	800x800mm	600x600mm	300x600mm
Pieces / Box	2 pcs.	2 pcs.	4 pcs.	5 pcs.
Area / Box	1.44 sq. mtr.	1.28 sq. mtr.	1.44 sq. mtr.	0.9 sq. mtr.
Weight / Box (approx*)	31.5 kgs.	28.5 kgs.	28.5 kgs.	17.5 kgs.