

LAVISH GRANITO PVT. LTD.

halvad Road, At. Unchi Mandal, Dist. Morbi - 363 642 (Gujarat) INDIA. +91 99786 00408/409 | info@lavishceramics.com | www.lavishceramics.com

CRAFTED UNIQUELY



www.lavishceramics.com



SINCE 1999

The brand 'Lavish' is working tirelessly to sustain its name as the most trustworthy source for selection & procurement of tiles.



Since the past couple of decades 'Lavish' has exceeded expectations in providing innovative products to all its customers with really one of a kind accumulation of tiles and a remarkable pledge to Customer Service that provides finesse, style and quality.

'Lavish' has advanced to wind up one of the biggest ceramic manufacturers in India and its accumulations are a wonderful mix of most excellent designs covering walls & floors of both indoors & outdoors. Accompanied by ISO 9001 certified methods of production that provide quality, Lavish Group is also known as one of the largest producers of tiles in India. Our supreme quality is a result of a leading-edge 21st-century production process that includes highend machinery, quality control process, research and development as well as automation. We are always excited to provide designs that suit your choice so go through our splendid gallery and choose us to perform your genuine decor upliftment!

Glazed Porcelain Tiles | Double Charge | Wall Tiles

800x1600mm | 800x800mm | 600x1200mm | 200x1200mm 600x600mm | 300x600mm



EXCLUSIVE SERIES

Look deep into nature, and then you will understand the art of living better. This collection proves that just living is not enough, one must consider the charm of nature for uplifting the character of their space.





Graphite	
01	







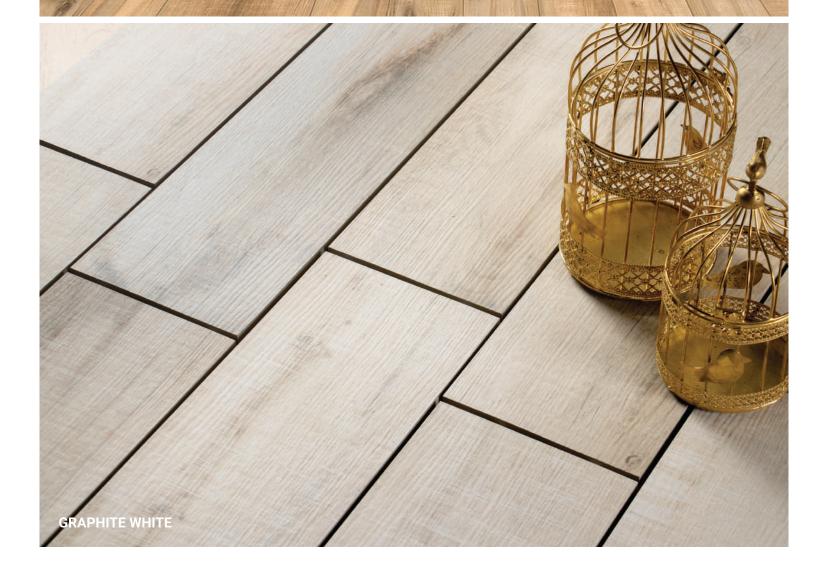

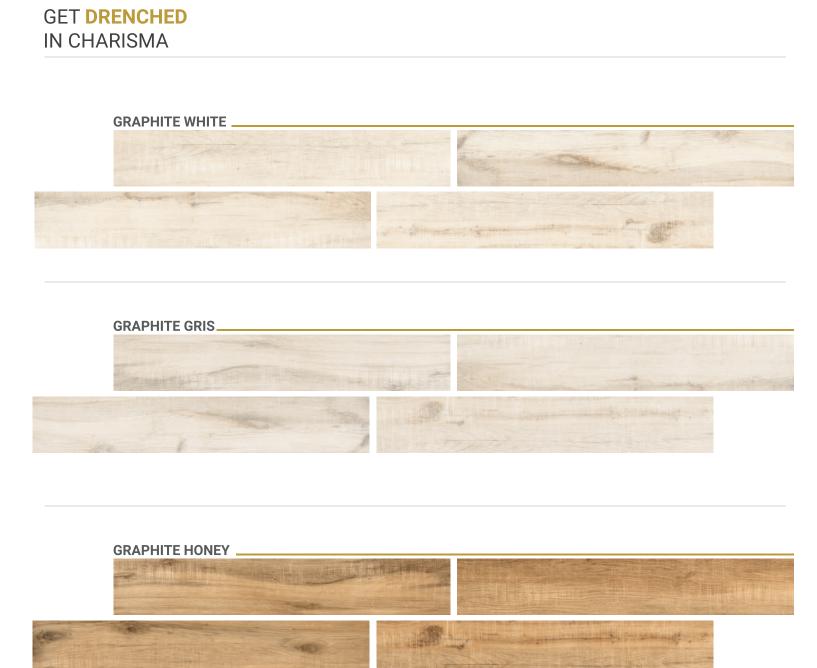






















BECOME ONE
WITH SUPREME MAGNIFICENCE



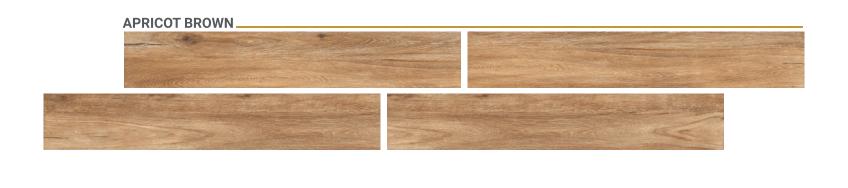

APRICOT WHITE









CATCH THE BEST OF **PANACHE** APRICOT HONEY APRICOT GRIS _ APRICOT COPPER









LATINA AVOR	RIO			
Recent		A STATE OF THE PARTY OF THE PAR		
		A Brown		
LATINA BEIGI	<u> </u>			
EATINA BEIGI		and the same of	an Table 1- F	
Contract of the second	alle Tarable	A PER METERS	777	-
LATINA NATU	JRAL			









LATINA BROWN
Succession of the second secon
A RECEIVE TO A STATE OF THE PARTY OF THE PAR
LATINA HONEY
The contract of the second of
All the second s
LATINA GREY
All sacrations and the sacration of the
LATINA CREMA








EXPERIENCE
THE BEST OF **GRANDIOSITY**









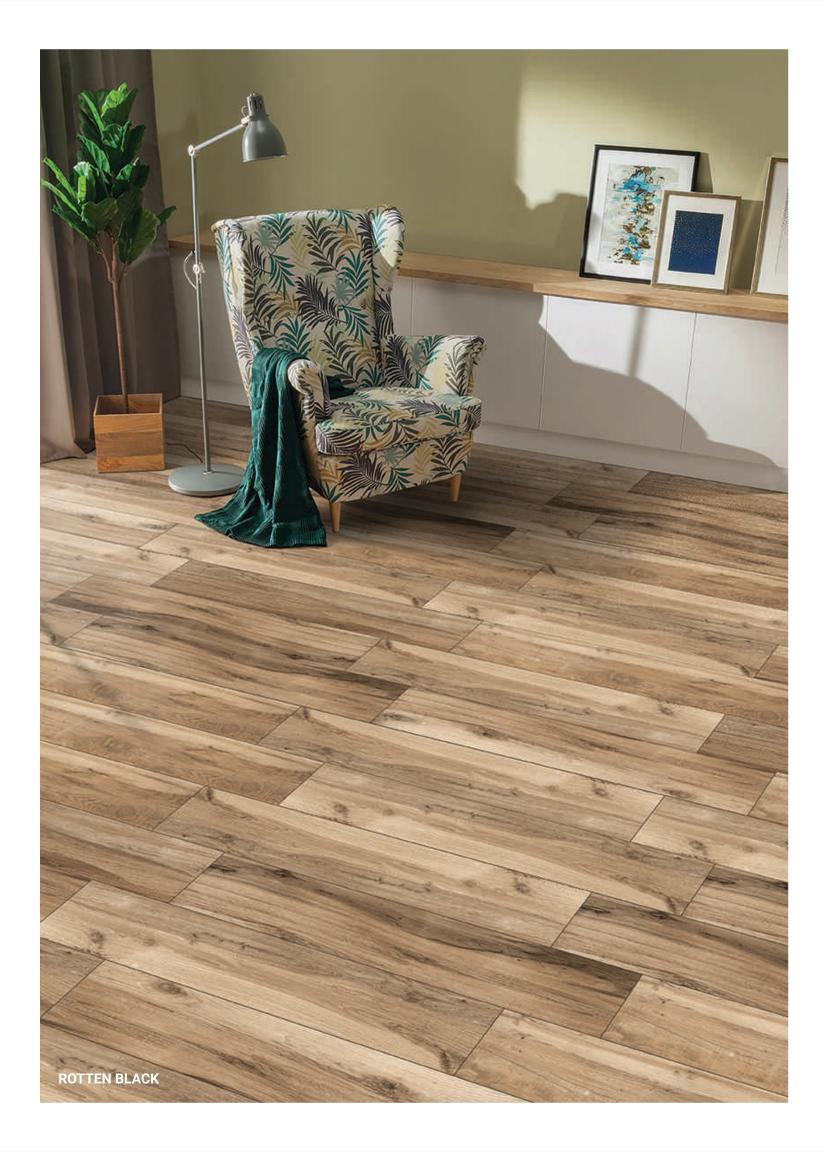




REGAL STYLE CHOICE YOU SHOULD MAKE









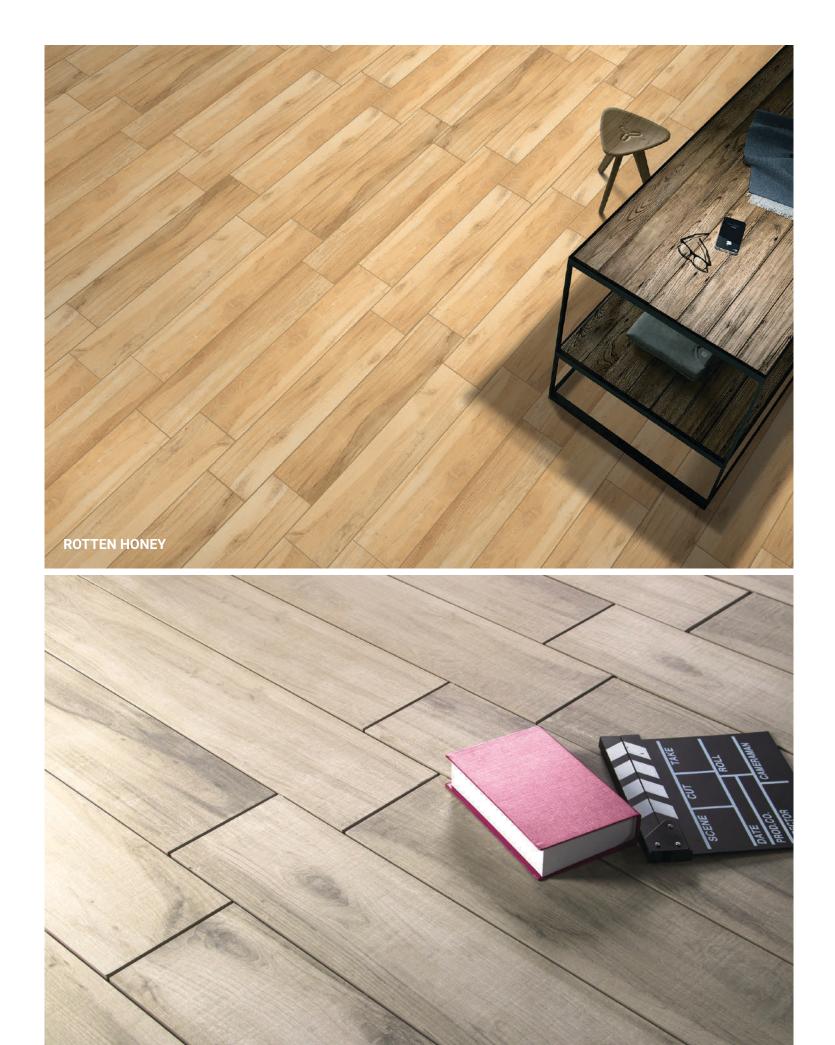

ROTTEN GRIGIO





ADD THE ART
OF NATURAL PERFECTION.

ROTTEN GRIGIO

ROTTEN HONEY







CINNAMO	N TORTORA		
-			
CINNAMO	N BROWN		
		-	
		Luca	
CININIAMOI	N HONEY		























WORK UP ON THE REFINMENT OF YOUR PLACE












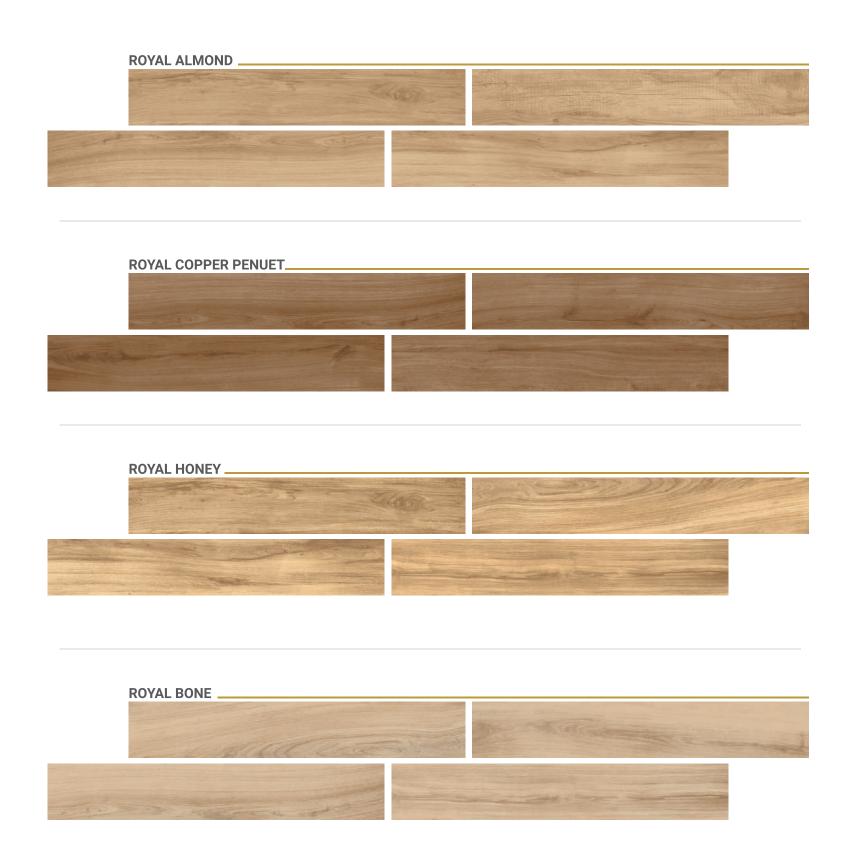












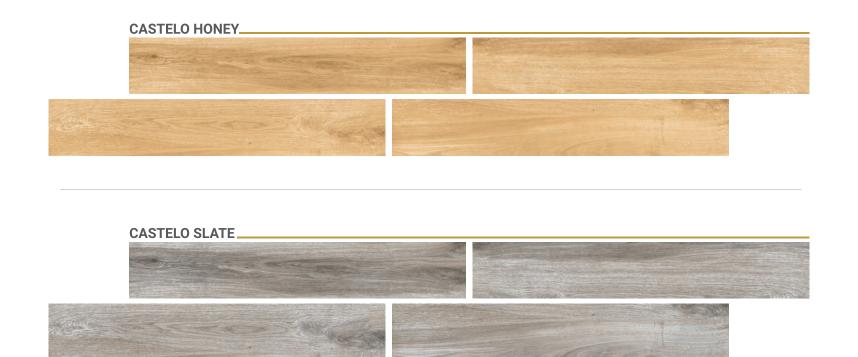


















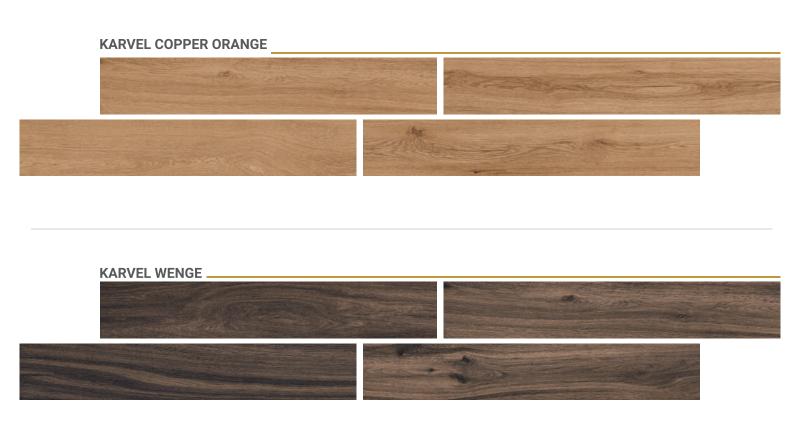











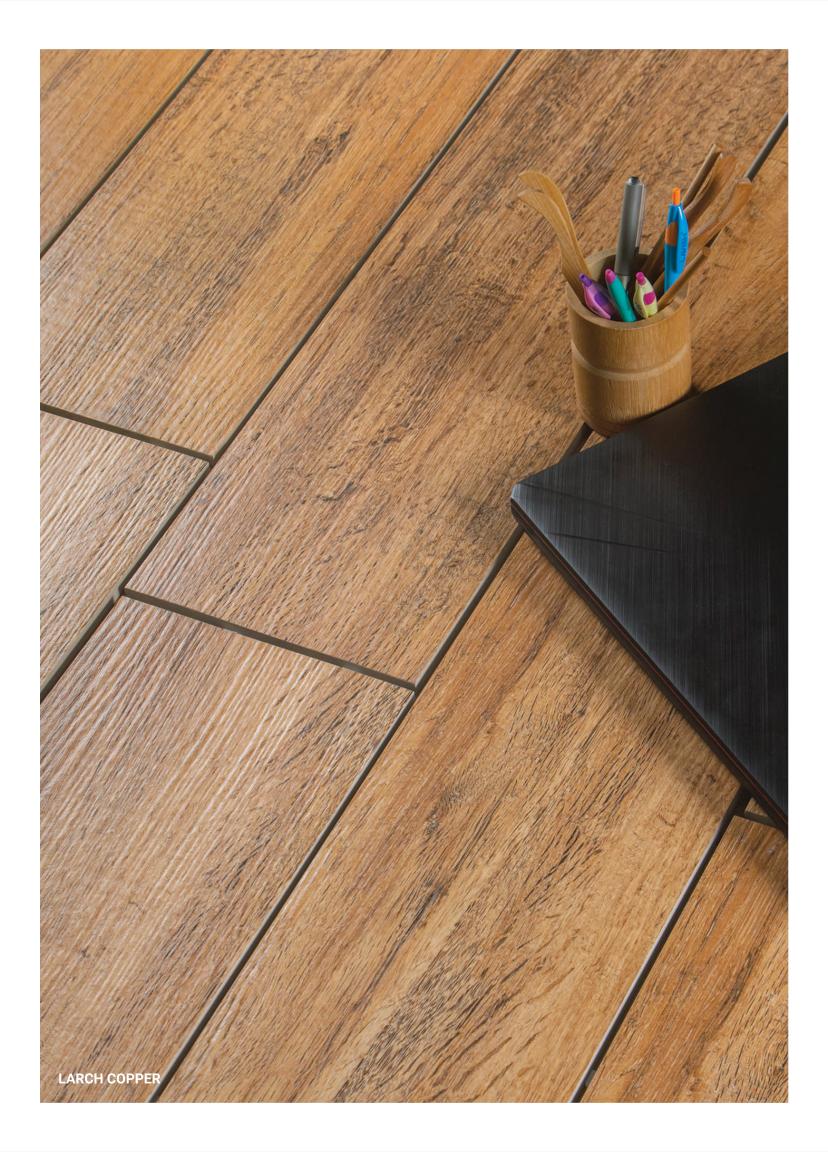







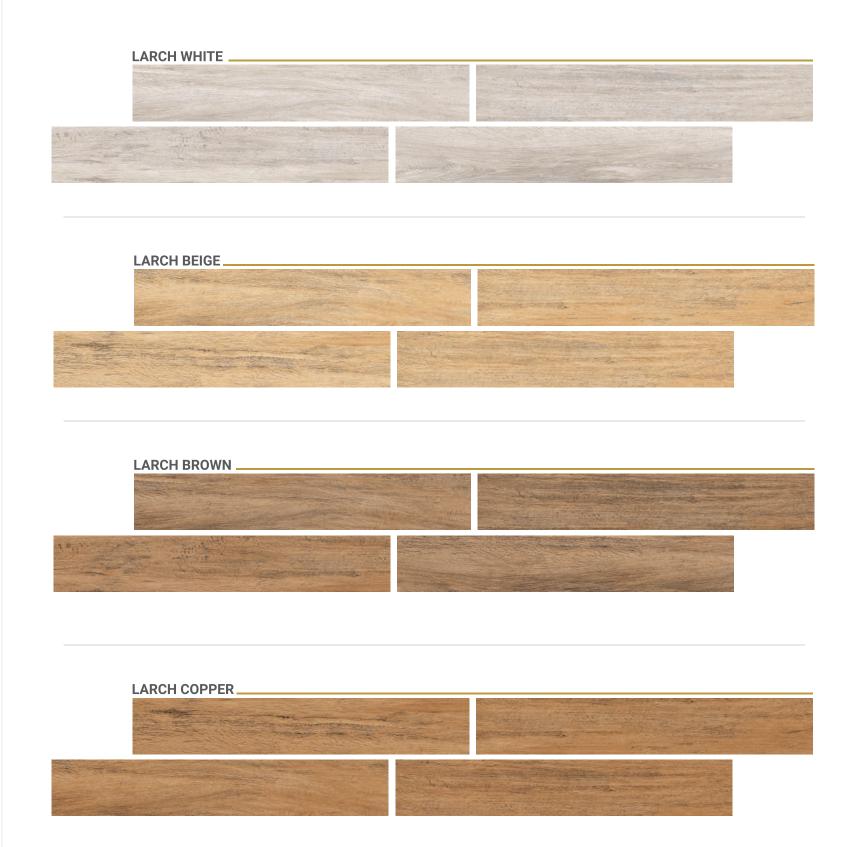



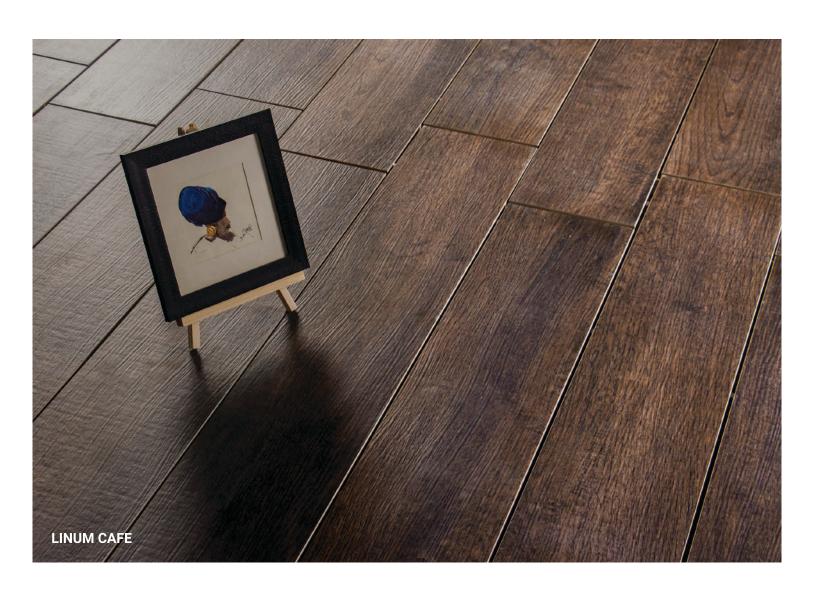

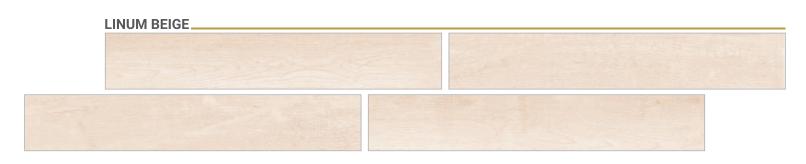








TAKING HOMES
A STEP FURTHER






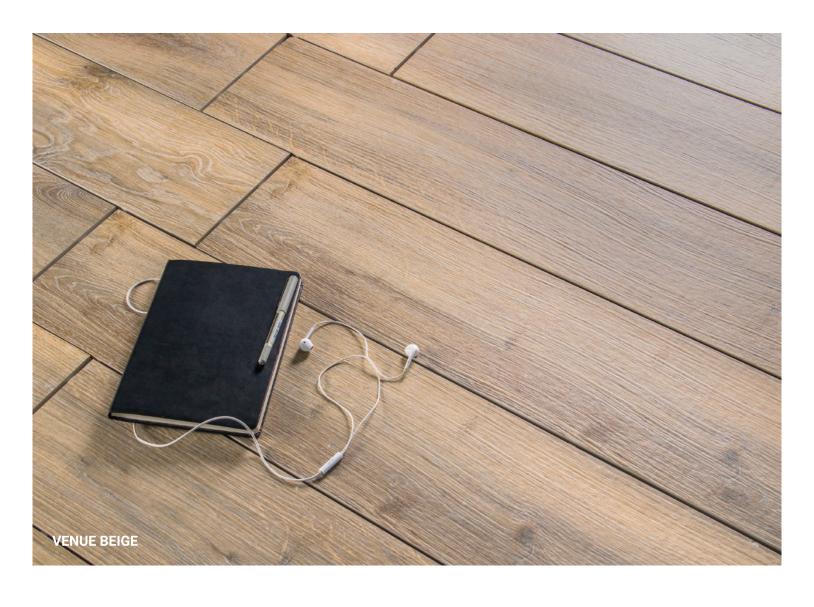







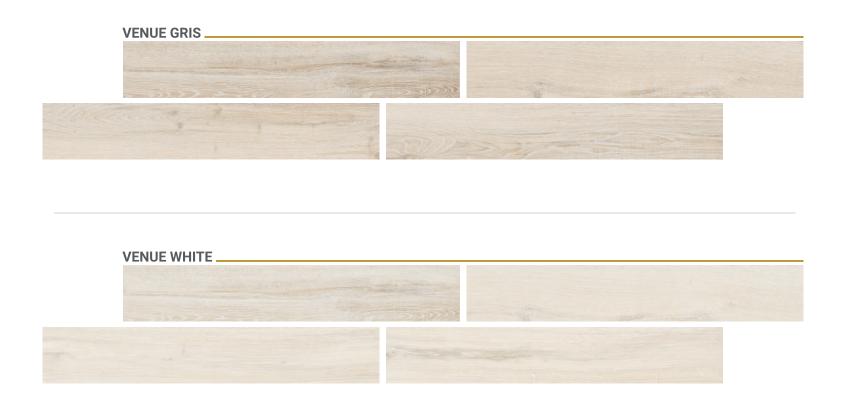








IT'S TIME TO PLEASE YOUR SIGHT **ENDLESSLY**

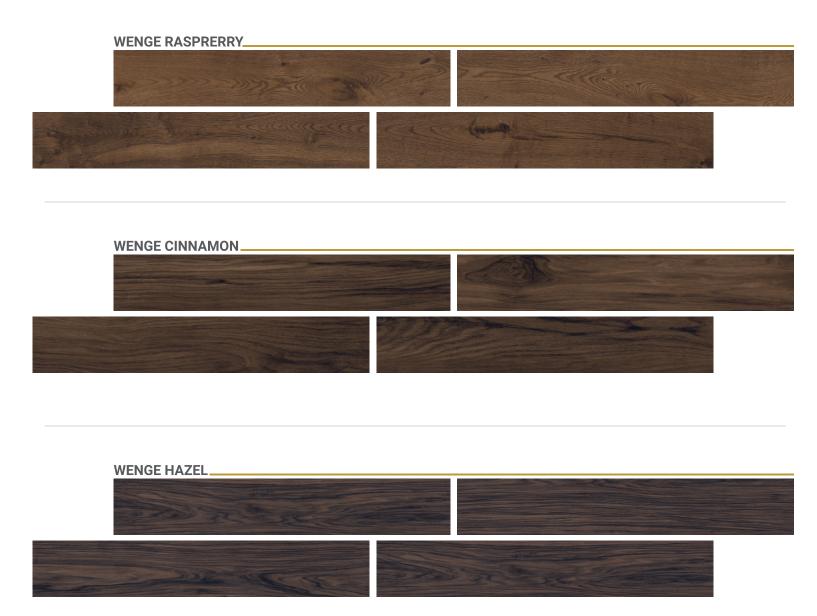











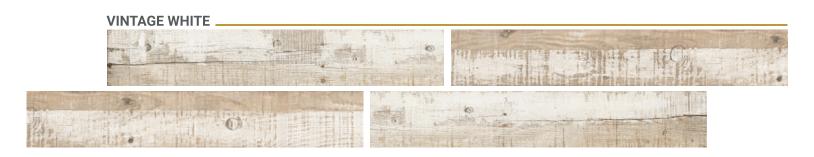







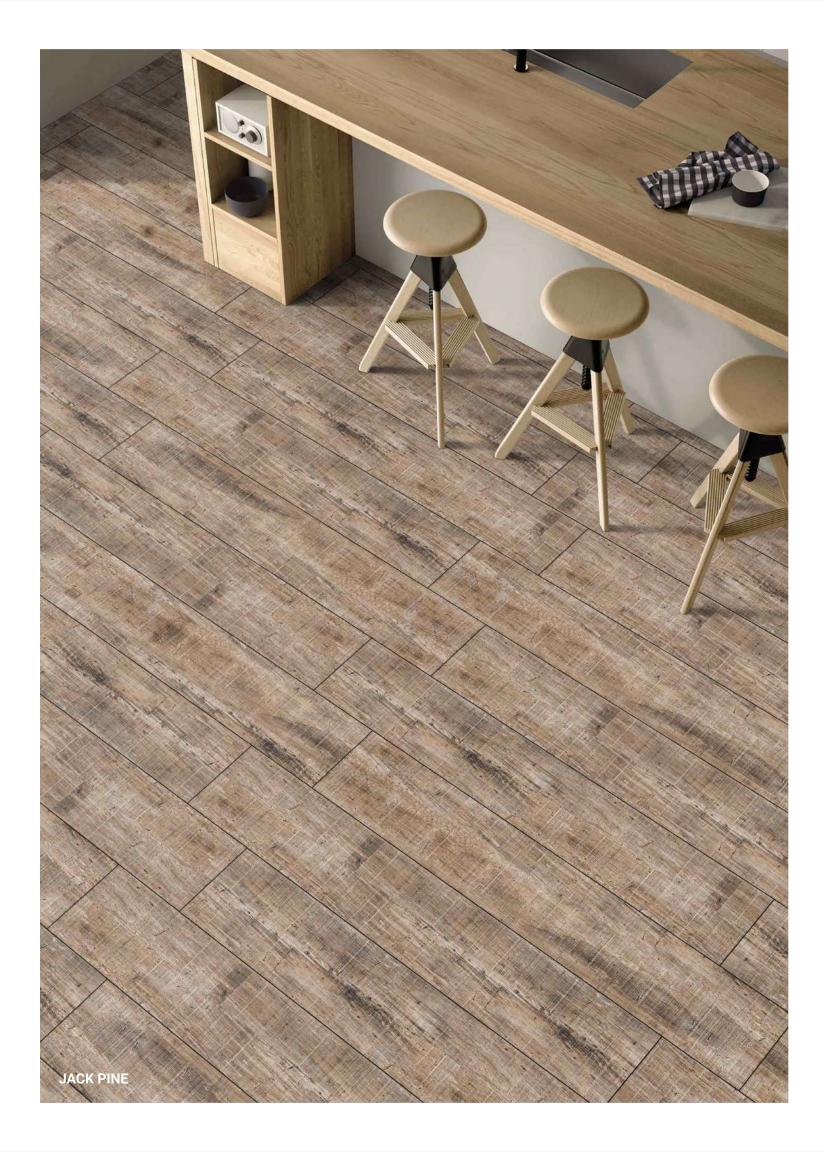




ADD THE ART OF NATURAL PERFECTION.









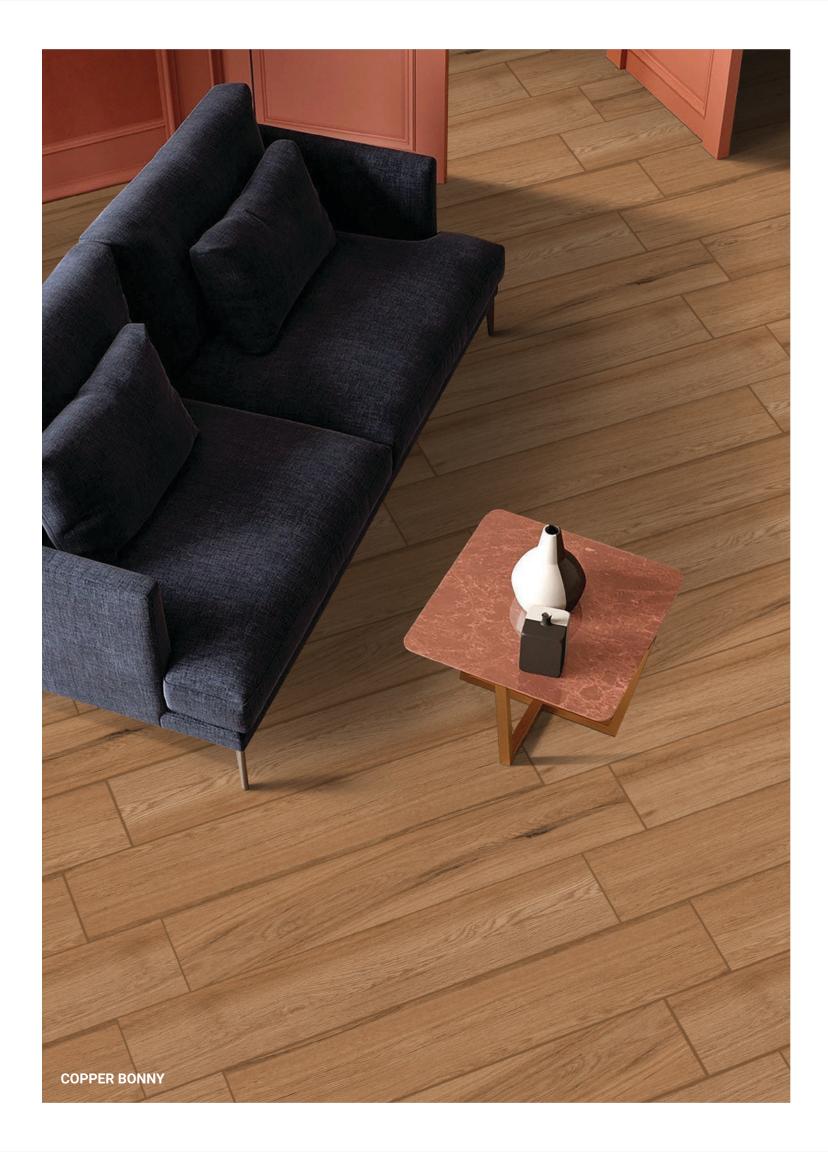



BRING YOUR
VISIONS TO REALITY









TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006 / En14411 GROUP Bla	LAVISH VALUE	TEST METHOD			
REGULATORY PROPERTIES						
Deviation in length & width	± 0.5%	± 0.3%	ISO - 10545-2			
Deviation in thickness	±0.5%	±4.0%	ISO-10545-2			
Straightness in side	±0.5%	±0.1%	ISO-10545-2			
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2			
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2			
Color difference	Uniterned	No change	ISO-10545-16			
Glossiness	As per mfg.	Min 90%	GLOSSO METER			
STRUCTURAL PROPERTIES						
Water absorption	< 0.50%	< 0.05%	ISO-10545-3			
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082			
MASSIVE MECHANICAL PROPERTIES						
Modulus of repture	Min. 35 N/mm²	Min. 40 N/mm²	ISO-10545-4			
Breaking strength	Min. 1300 N	Min. 1800 N	ISO-10545-4			
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5			
SURFACE MECHANICAL PROPERTIES						
Resistance to surface abrasion (PEI Rating)	As per mfg.	Class 4	ISO-10545-7			
MOH's hardness	As per mfg.	Min 5	EN 101			
THERMO HYGROMRTRIC PROPERTIES						
Frost resistance	No damage	No damage	ISO-10545-12			
Thermal shock resistance	No damage	No damage	ISO-10545-9			
Moisture expansion	Nil	Nil	ISO-10545-10			
Thermal expansion (COE)	Max. 9.0x10 ⁻⁰	Max. 6.5x10 ⁻⁰	ISO-10545-8			
Crazing resistance	As per mfg.	Min 10 Cycle	ISO-10545-11			
CHEMICAL PROPERTIES						
Chemical resistance	No damage	No damage	ISO-10545-13			
Stain resistance	Min. Class 3	Class 5	ISO-10545-14			
SEFETY PROPERTIES						
Slip resistance	As per mfg.	> 0.40	ISO-10545-17			
Fire resistance	As per mfg.	Fireproof	N.A.			
Lead & Cafmium given off by glazes tiles	As per mfg.	Does not yield Pb & Cd	ISO-10545-15			

The information contained in this catalogue is a accurate as possible, but cannot be considered as legally binging. The Company reserves the right to make any modifications that become necessary due to production requirements. Weight colours and dimensions are subject to the inevitable variation typical of the ceramic firing process. The colours are possible to the actual colours, within the limits allowed by the printing process. For technical printing reasons, the colours shown may slightly differ from the actual tiles. LAVISH CERAMICS RESERVES THE RIGHT TO MODIFY THE TECHNICAL INFORMATION QUOTED IN THIS CATALOGUE.

