



LAVISH[®]
WALL | VITRIFIED | DOUBLE CHARGE

F I N

E S S

E

THAT
HOLDS A
PRIME REFLECTION
OF FLAIR

600x600

NANO
TECHNOLOGY

www.lavishceramics.com

/ VITRIFIED TILES
600 x 600 mm




Ivory



Art 03



Art 05

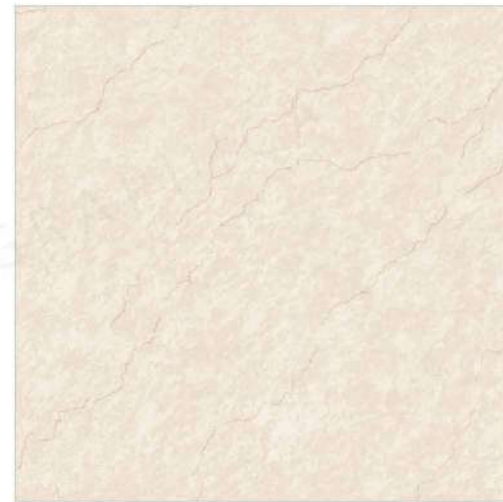

Art 06



Art 11




Art 13

/ VITRIFIED TILES
600 x 600 mm



Art 14

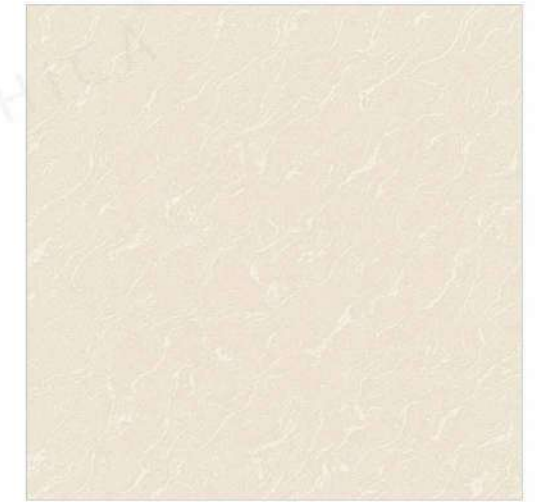

Art 15



Art 26



Art 28



Art 29



Art 30



Art 32



Art 33



Art 34



Art 35



Art 36



Art 37





Art 38




Art 39



Twi 26



Art Oak Wood

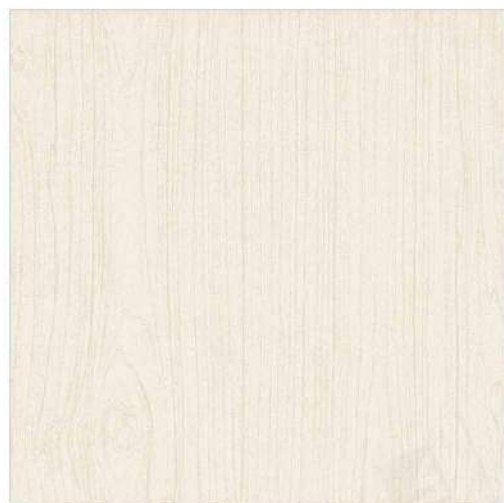

Art Timber Wood



/ VITRIFIED TILES
600 x 600 mm



Art M 01



Art M 02



Art M 03



Art M 04




Art M 10




Art Dc 02

/ VITRIFIED TILES
600 x 600 mm

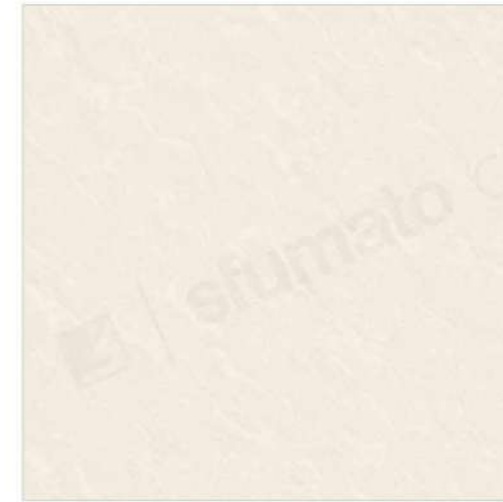

Tws 03

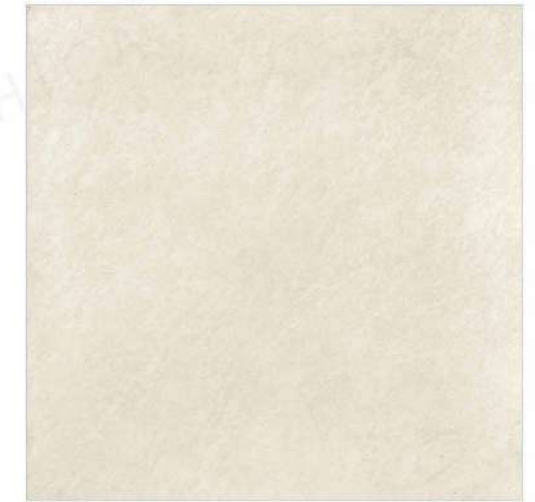


Tws 04



Tws 05



Tws 07

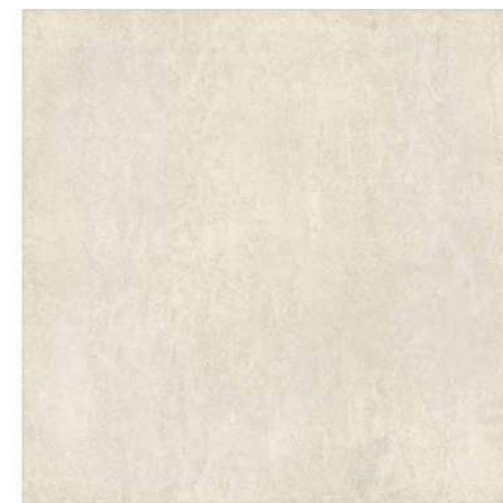

Tws 08



Tws 09



Twis 10



Conova




Fossil



Silvia



Florenzia

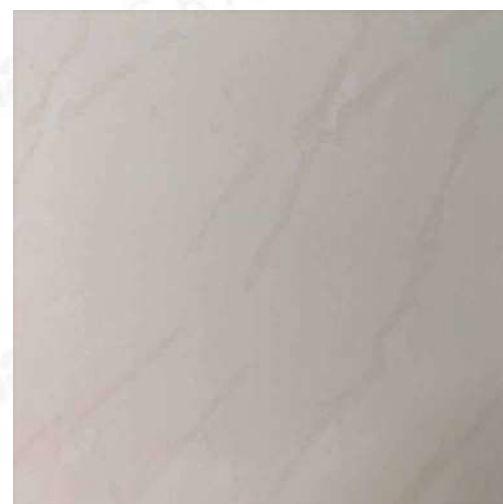

Musical Beige


EXPORT DESIGNS

Sr. No	PROPERTY	International Std. ISO 13006/EN 176 Group Bla	OUR VALUE	Method Of Testing
1.	Deviation in Length	± 0.6%	± 0.1%	EN 98
2.	Deviation in Thickness	± 5.0 %	± 3.0%	EN 98
3.	Straightness of sides	± 0.5%	± 0.1%	EN 98
4.	Rectangularity	± 0.6%	± 0.2%	EN 98
5.	Surface Flatness	± 0.5%	± 0.2%	EN 98
6.	Water absorption*	< 0.5%	< 0.05%	EN 99
7.	Mohs hardness*	> 6	> 8	EN 101
8.	Flexural Straightness*	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion resistance	< 204 mm ²	< 144 mm ²	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength*	1113 N	2830 N	ASTM C-648
12.	Density (g/cc)	> 2	2.4	DIN 51082
13.	Frost Resistance	Frost Proof	Frost Proof	EN 202
14.	Chemical Resistance	No Damage	No Damage	EN 106
15.	Thermal Shock Resistance	No Damage	No Damage	EN 104
16.	Colour Resistance	No Damage	No Damage	DIN 51094
17.	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistance	Resistance	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	-	Min 65% - 70% reflection	Glossmeter

PACKING DETAIL

Size	Normal Thickness	No. of Tiles/Box	Coverage Area	Wt. of Box
600 x 600 mm	8.00 mm (Approx)	4 pcs.	1.44 Sq. Mtr.	26 Kgs. (Approx)

APPLICATIONS

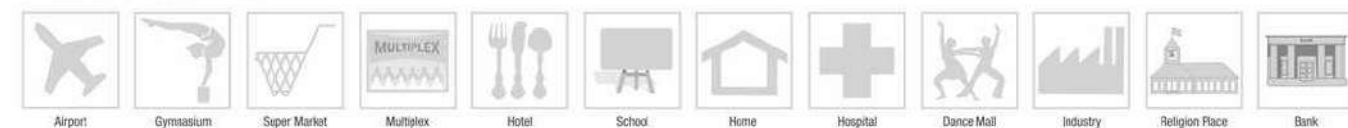

Note : Colours shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice.



LAVISH GRANITO PVT. LTD.

halvad Road, At. Unchi Mandal, Dist. Morbi - 363 642 (Gujarat) INDIA.
+91 99786 00408/409 | info@lavishceramics.com | www.lavishceramics.com