



LAVISH CERAMICS
8-A, National Highway, Lakhdhipur Road,
Nr, Antique Granito Ltd. Morbi-363 642 (Guj.) INDIA.

+91 84691 29888 | Info@lavishceramics.com
www.lavishceramics.com

LAVISH[®]
CERAMICS

by. **MOULD**


• • •

20x120cm

WOODEN STRIP

www.lavishceramics.com



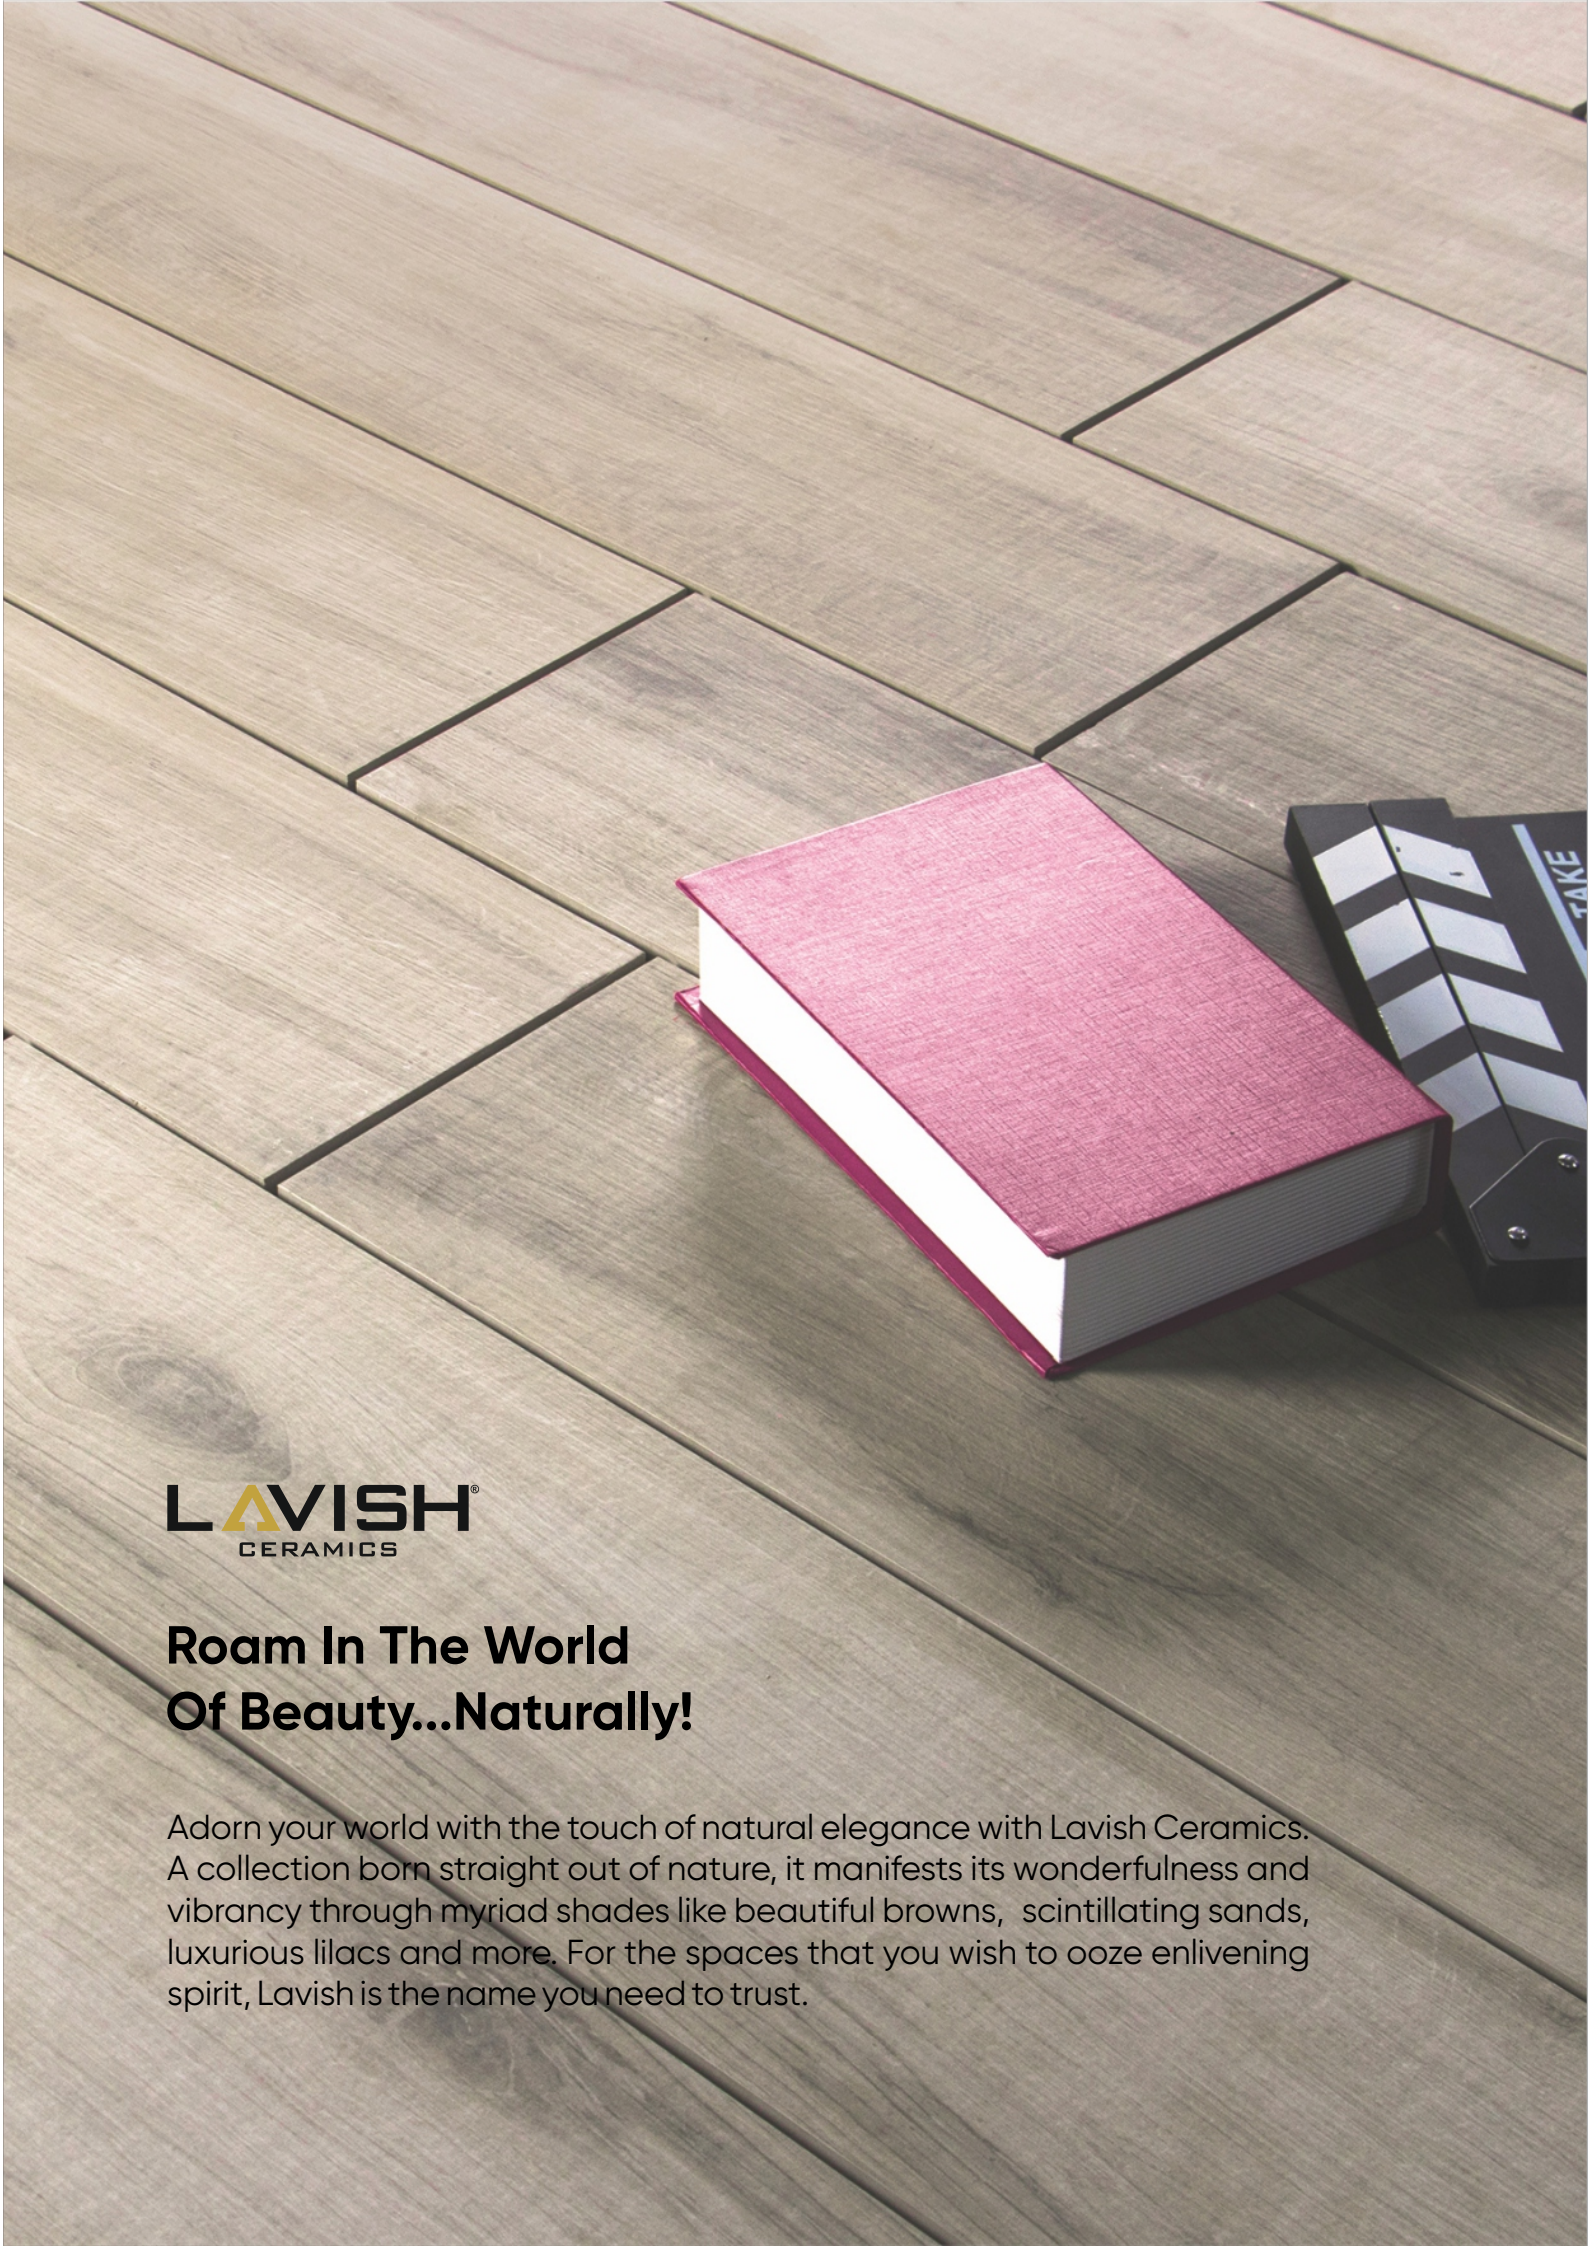

Roam In The World Of Beauty...Naturally!

Adorn your world with the touch of natural elegance with Lavish Ceramics. A collection born straight out of nature, it manifests its wonderfulness and vibrancy through myriad shades like beautiful browns, scintillating sands, luxurious lilacs and more. For the spaces that you wish to ooze enlivening spirit, Lavish is the name you need to trust.



WALL & FLOOR TILES

Glazed Porcelain Tiles 120x120 60x60 60x120 80x160 80x80 30x60cm	Wooden Tiles 20x120 30x120cm	Architectural Surfaces 30x120cm
Double Charged Tiles 60x60 60x120cm	Fullbody 60x60 60x120cm	Ceramic Wall Tiles 30x60cm 25x40 Subway Tiles
Outdoor Tiles 60x60 60x90 60x120 20x120 30x120cm	Thickness 07mm 09mm 20mm	

At Lavish, we've cultivated a passion for excellence through persistent efforts. Our approach to business involves thoroughly studying the market to design products that align with our values - innovation, creativity, and perfection! This, coupled with our commitment to a quality culture and expert craftsmanship, sets us apart as a reputed ceramic tile manufacturer and exporter. Our strict quality control process and certifications, such as ISO 9001:2015, CE, and UK CA, attest to our dedication to international standards. Additionally, constant R&D investment and a dedicated team enable us to launch new product lines while offering exceptional customer support.

Today, we serve over 50 countries worldwide. Despite the challenges of entering India's established tile industry, we have established our brand as a trusted source of high-quality ceramic wall and floor tiles, double charge vitrified tiles, polished vitrified tiles, glazed vitrified tiles, and digital tiles. Craftsmanship is a hallmark of our group, and we position ourselves as a team of skilled artisans rather than simply tile manufacturers. The unique designs, colors, sizes, & finishes of our surfaces set us apart, offering a fresh and distinctive alternative in an otherwise uniform market.

20x120cm WOODEN STRIP

The panvel series features wooden strip tiles with subtle shades, combining natural aesthetics and contemporary design for a sophisticated and versatile look.

PANVEL SERIES

NATURAL

BROWN

MIELE


BEIGE

MINT


GREIGE

WHITE

PANVEL BEIGE

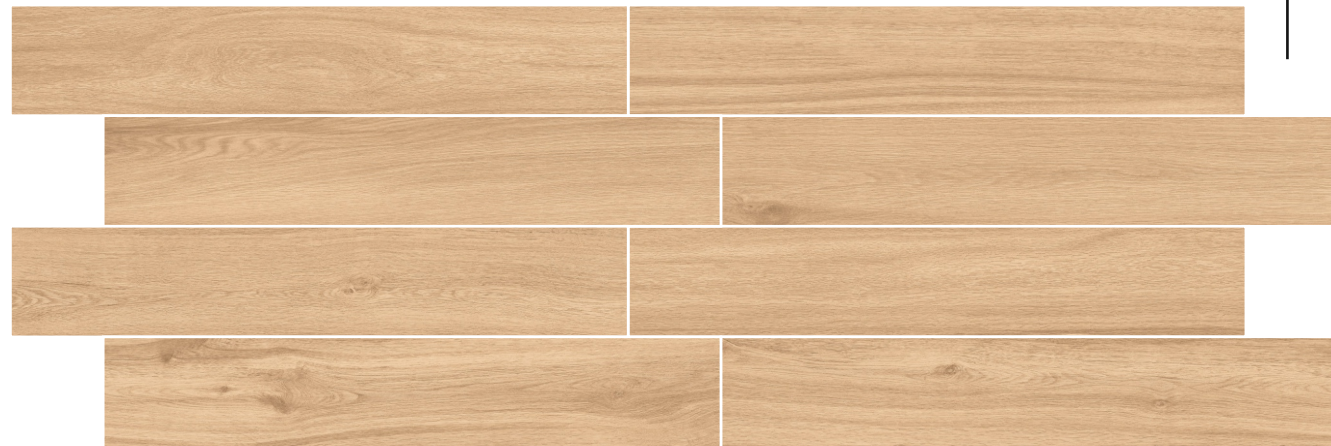

PANVEL BROWN

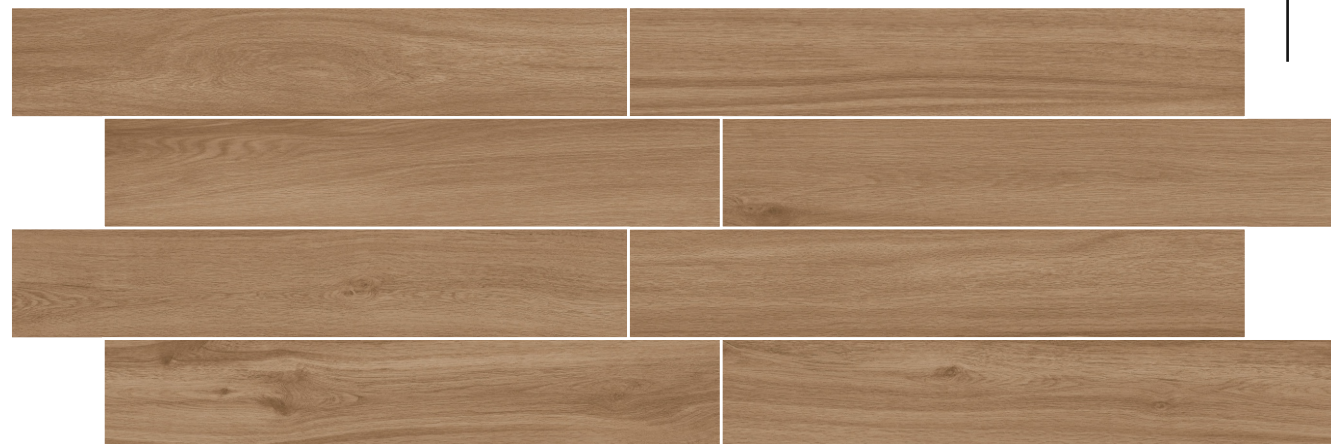

PANVEL GREIGE



Size :
20x120cm


Randoms :
12

200x120cm



PANVEL BEIGE

PANVEL NATURAL

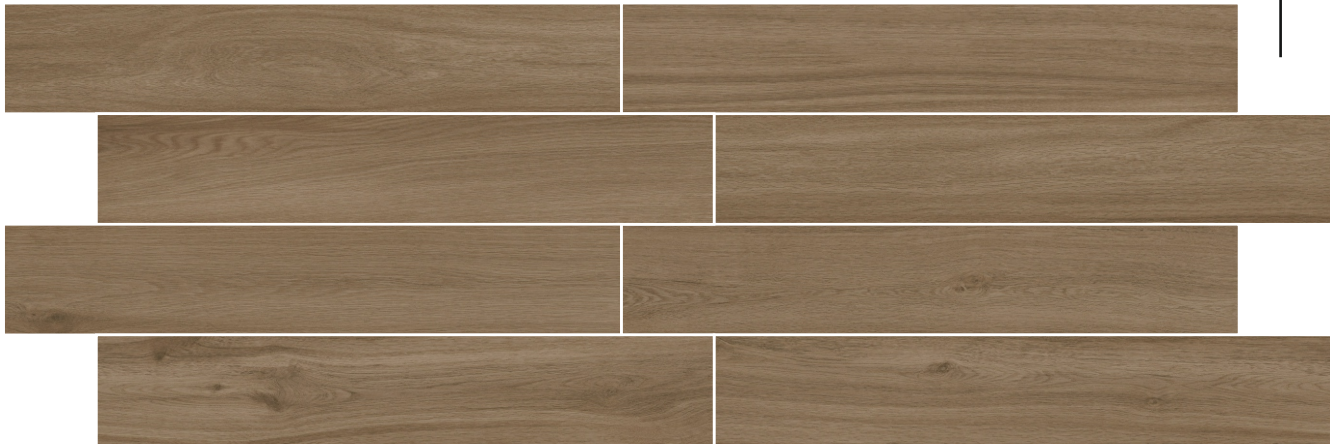

PANVEL MINT



PANVEL WHITE



PANVEL MIELE



Size :
20x120cm

Randoms :
12

200x120cm



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006 / En14411 GROUP Bla	LAVISH VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	± 0.5%	± 0.3%	ISO-10545-2
Deviation in thickness	± 0.5%	± 4.0%	ISO-10545-2
Straightness in side	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Color difference	Unlterned	No change	ISO-10545-16
STRUCTURAL PROPERTIES			
Water absorption	< 0.50%	< 0.05%	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of repture	Min. 35 N/mm²	Min. 40 N/mm²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 1800 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Resistance to surface abrasion (PEI RATING)	As per mfg.	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg.	Min. 5	EN 101
THERMO HYGROMRTRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nill	Nill	ISO-10545-10
Thermal expansion(COE)	Max. 9.0x10 ⁻⁶	Max. 6.5x10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Min. Class 3	Class 5	ISO-10545-14
SEFETY PROPERTIES			
Slip resistance	As per mfg.	> 0.40	ISO-10545-17
Fire resistance	As per mfg.	Fireproof	N.A.
Lead & Cafmium given off by glazes tiles	As per mfg.	Does not yield Pb & Cd	ISO-10545-15

PACKAGING DETAILS

SIZE	200x1200mm
PIECES/BOX	5.pcs.
AREA/BOX	1.2sq. mtr.
WEIGHT/BOX	25 kgs.
SQ.FT.	12.91sq.ft.

The information contained in this catalogue is a accurate as possible, but cannot be considered as legally binging. The Company reserves the right to make ant modification that become necessary due to production requirements. Weight colors and dimensions are subject to the inevitable variation typical of the ceramic firing process. the colors are possible to the actual colors, within the limits allowed by the printing process. for technical printing reasons, the colors shown may slight differ from the actual tiles. LAVISH CERAMICS RESERVES THE RIGHT TO MODIFY THE TECHNICAL INFORMATION QUOTED IN THIS CATALOGUE.