

CRAFTING LEGACY


COLLECTION



TURNING SPACES INTO SINCE 1999 SUCCESS STORIES

At Lavish, we combine innovation, craftsmanship, and strict quality standards to produce exceptional ceramic tiles. Recognized globally and backed by certifications like ISO 9001:2015, ISO 14025:2006, CE, and UK CA, we've become a trusted name in over 85 countries. Our unique designs and dedication to perfection set us apart as true artisans in the tile industry.

BUILT ON THE FOUNDATION OF





WALL & FLOOR TILES

Craftsmanship is also at the heart of our brand! In a way, we don't consider ourselves manufacturers but we see ourselves as a team of skilled artisans who take great care in crafting beautiful surfaces that are unmatched, unparalleled, and unrivaled! The uniqueness of our product is reflected in our designs, colors, sizes, and finishes which are exclusive to us and different by all means! In short, "We are a breath of fresh air in a sea of sameness"!

Glazed Porcelain Tiles 30x60 | 60x60 | 80x80 60x120 | 80x160 | 100x100 120x120 | 120x180cm

Double Charged Tiles 60x60 | 60x120cm

Wooden Tiles 10x60cm | 20x120 | 30x120 20x160 | 26x160cm

Fullbody 60x60 | 60x120cm

Architectural Surfaces 30x120cm

Outdoor Tiles 30x30 | 30x60 | 60x60 | 60x90 60x120 | 20x120 | 30x120cm Ceramic Wall Tiles 25x40 | 30x60cm Subway Tiles

Thickness 07mm | 08mm | 09mm 12mm | 20mm





MATWITSTRUCTURE COLLECTION SOLVED | 80x160 | 100x100 | 120x120 | 120x180 (in cm)






Onida

FINISH: MATT SIZE: 60x120cm AVAILABLE SIZES IN CM 30x60 | 60x60 | 80x80 | 60x120 80x160 | 100x100 | 120x120 | 120x180







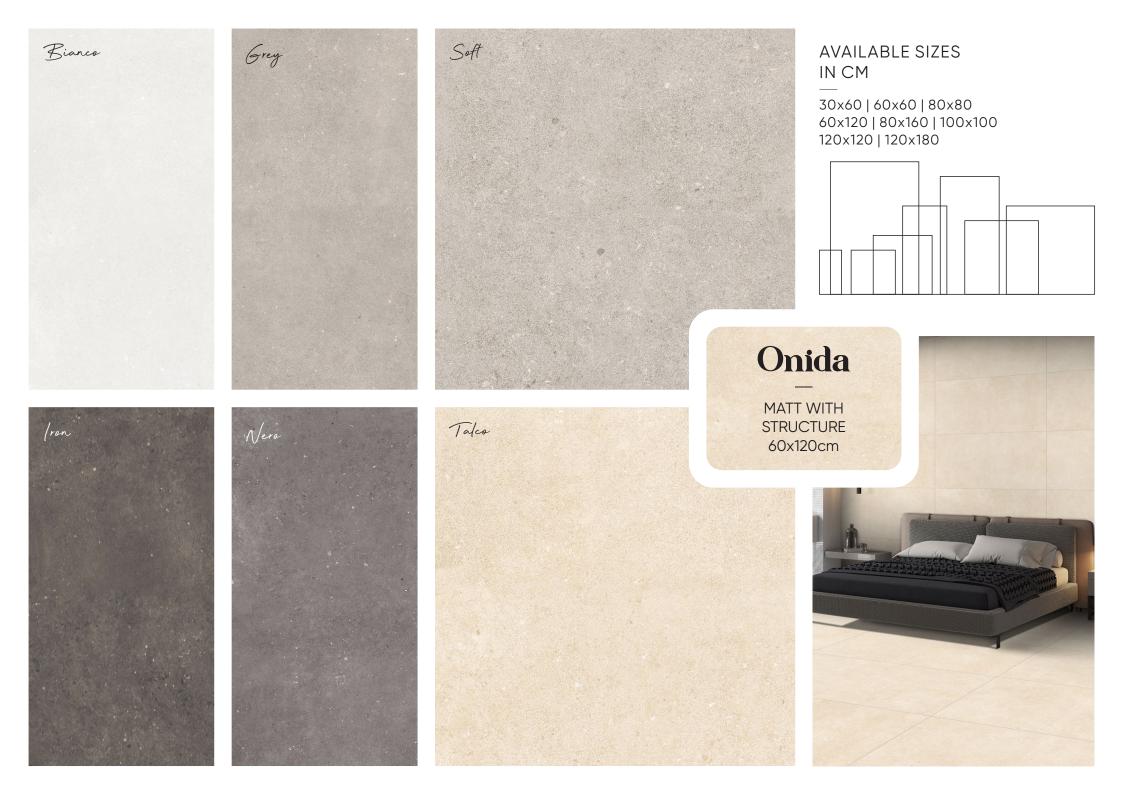

CHARACTERISTIC	STANDARD AS PER ISO-13006 / En14411 GROUP Bla	LAVISH VALUE	TEST METHOD	
REGULATORY PROPERTIES				
Deviation in length & width	± 0.5%	± 0.3%	ISO-10545-2	
Deviation in thickness	± 5%	± 4.0%	ISO-10545-2	
Straightness in side	± 0.5%	± 0.1%	ISO-10545-2	
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2	
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2	
Color difference	Unlterned	No change	ISO-10545-16	
Glossiness	As per mfg.	Min 90 %	GLOSSO METER	
STRUCTURAL PROPERTIES				
Water absorption	< 0.50%	< 0.05%	ISO-10545-3	
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082	
MASSIVE MECHANICAL PROPERTIES				
Modulus of repture	Min. 35 N/mm²	Min. 40 N/mm²	ISO-10545-4	
Breaking strength	Min. 1300 N	Min. 1800 N	ISO-10545-4	
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5	
SURFACE MECHANICAL PROPERTIES				
Resistance to surface abrasion (PEI RATING)	As per mfg.	Min. Class-3	ISO-10545-7	
MOH's hardness	As per mfg.	Min. 5	EN 101	
THERMO HYGROMETRIC PROPERTIES				
Frost resistance	No damage	No damage	ISO-10545-12	
Thermal shock resistance	No damage	No damage	ISO-10545-9	
Moisture expansion	Nill	Nill	ISO-10545-10	
Thermal expansion(COE)	Max. 9.0x10 ⁻⁶	Max. 6.5x10⁻ ⁶	ISO-10545-8	
Crazing resistance	As per mfg.	Min. 10 Cycle	ISO-10545-11	
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	ISO-10545-13	
Stain resistance	Min. Class 3	Class 5	ISO-10545-14	
SAFETY PROPERTIES				
Slip resistance	As per mfg.	> 0.40	ISO-10545-17	
Fire resistance	As per mfg.	Fireproof	N.A.	
Lead & Cafmium given off by glazes tiles	As per mfg.	Does not yield Pb & Cd	ISO-10545-15	

PACKING DETAILS

Size	30x60 CM	60x60 CM	80x80 CM	60x120 CM	80x160 CM	100x100 CM	120x120 CM	120x180 CM
Pieces / Box	05 Pcs.	04 Pcs.	02 Pcs.					
Area / Box	0.9 sq. mtr.	1.44 sq. mtr.	1.28 sq. mtr.	1.44 sq. mtr.	2.56 sq. mtr.	2.00 sq. mtr.	2.88 sq. mtr.	4.32 sq. mtr.
Weight / Box (approx*)	17.5 kg	27 kg	26 kg	29 kg	52 kg	40 kg	58 kg	90 kg



LAVISH GRANITO PVT. LTD.

Halvad Road, At. Unchi Mandal, Dist. Morbi - 363 642 (Gujarat) India.

Cell: +91 99099 80082 | +91 99099 87126

E-mail: export@lavishceramics.com | inquiry@lavishceramics.com

Web: www.lavishceramics.com