



CRAFTING LEGACY

PQVT

COLLECTION



---

## TURNING SPACES INTO SUCCESS STORIES **SINCE 1999**

---

At Lavish, we combine innovation, craftsmanship, and strict quality standards to produce exceptional ceramic tiles. Recognized globally and backed by certifications like ISO 9001:2015, ISO 14025:2006, CE, and UK CA, we've become a trusted name in over 85 countries. Our unique designs and dedication to perfection set us apart as true artisans in the tile industry.

---

## BUILT ON THE FOUNDATION OF



## WALL & FLOOR TILES

Craftsmanship is also at the heart of our brand! In a way, we don't consider ourselves manufacturers but we see ourselves as a team of skilled artisans who take great care in crafting beautiful surfaces that are unmatched, unparalleled, and unrivaled! The uniqueness of our product is reflected in our designs, colors, sizes, and finishes which are exclusive to us and different by all means! In short, "We are a breath of fresh air in a sea of sameness"!

**Glazed Porcelain Tiles**  
30x60 | 60x60 | 80x80  
60x120 | 80x160 | 100x100  
120x120 | 120x180cm

**Wooden Tiles**  
10x60cm | 20x120 | 30x120  
20x160 | 26x160cm

**Architectural Surfaces**  
30x120cm

**Ceramic Wall Tiles**  
25x40 | 30x60cm  
Subway Tiles

**Double Charged Tiles**  
60x60 | 60x120cm

**Fullbody**  
60x60 | 60x120cm

**Outdoor Tiles**  
30x30 | 30x60 | 60x60 | 60x90  
60x120 | 20x120 | 30x120cm

**Thickness**  
07mm | 08mm | 09mm  
12mm | 20mm



# POLISHED COLLECTION

*30x60 | 60x60 | 80x80 | 60x120 | 80x160 | 100x100 | 120x120 | 120x180 (in cm)*

SIGNATURE  
LIVING


From timeless and traditional to trendy and bold, Our perfectly polished tiles will impart a unique look and functionality to your space, especially your most lived-in spaces.

Natural

# River Romano

FINISH : POLISHED

SIZE : 60x120cm

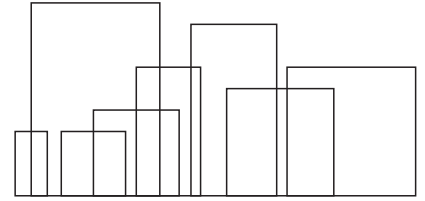

AVAILABLE SIZES IN CM

30x60 | 60x60 | 80x80 | 60x120  
80x160 | 100x100 | 120x120 | 120x180





Natural



Light

*Beige*

*Light*


*Natural*

# River Romano

POLISHED  
60x120cm

## AVAILABLE SIZES IN CM

30x60 | 60x60 | 80x80 | 60x120  
80x160 | 100x100 | 120x120 | 120x180

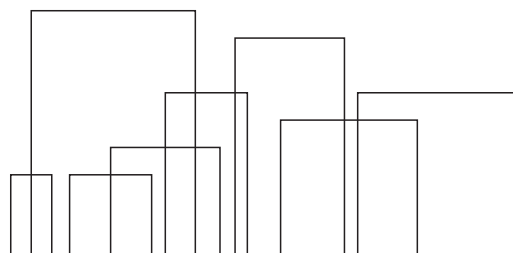

| CHARACTERISTIC                              | STANDARD AS PER<br>ISO-13006 / En14411<br>GROUP Bla | LAVISH VALUE              | TEST METHOD  |
|---------------------------------------------|-----------------------------------------------------|---------------------------|--------------|
| REGULATORY PROPERTIES                       |                                                     |                           |              |
| Deviation in length & width                 | ± 0.5%                                              | ± 0.3%                    | ISO-10545-2  |
| Deviation in thickness                      | ±5%                                                 | ± 4.0%                    | ISO-10545-2  |
| Straightness in side                        | ± 0.5%                                              | ± 0.1%                    | ISO-10545-2  |
| Rectangularity                              | ± 0.5%                                              | ± 0.1%                    | ISO-10545-2  |
| Surface flatness                            | ± 0.5%                                              | ± 0.2%                    | ISO-10545-2  |
| Color difference                            | Unlterned                                           | No change                 | ISO-10545-16 |
| Glossiness                                  | As per mfg.                                         | Min 90 %                  | GLOSSO METER |
| STRUCTURAL PROPERTIES                       |                                                     |                           |              |
| Water absorption                            | < 0.50%                                             | < 0.05%                   | ISO-10545-3  |
| Apparent density                            | > 2.0 g/cc                                          | > 2.10 g/cc               | DIN 51082    |
| MASSIVE MECHANICAL PROPERTIES               |                                                     |                           |              |
| Modulus of repture                          | Min. 35 N/mm <sup>2</sup>                           | Min. 40 N/mm <sup>2</sup> | ISO-10545-4  |
| Breaking strength                           | Min. 1300 N                                         | Min. 1800 N               | ISO-10545-4  |
| Impact resistance                           | As per mfg.                                         | Min. 0.55                 | ISO-10545-5  |
| SURFACE MECHANICAL PROPERTIES               |                                                     |                           |              |
| Resistance to surface abrasion (PEI RATING) | As per mfg.                                         | Min. Class-3              | ISO-10545-7  |
| MOH's hardness                              | As per mfg.                                         | Min. 5                    | EN 101       |
| THERMO HYGROMETRIC PROPERTIES               |                                                     |                           |              |
| Frost resistance                            | No damage                                           | No damage                 | ISO-10545-12 |
| Thermal shock resistance                    | No damage                                           | No damage                 | ISO-10545-9  |
| Moisture expansion                          | Nill                                                | Nill                      | ISO-10545-10 |
| Thermal expansion(COE)                      | Max. 9.0x10 <sup>-6</sup>                           | Max. 6.5x10 <sup>-6</sup> | ISO-10545-8  |
| Crazing resistance                          | As per mfg.                                         | Min. 10 Cycle             | ISO-10545-11 |
| CHEMICAL PROPERTIES                         |                                                     |                           |              |
| Chemical resistance                         | No damage                                           | No damage                 | ISO-10545-13 |
| Stain resistance                            | Min. Class 3                                        | Class 5                   | ISO-10545-14 |
| SAFETY PROPERTIES                           |                                                     |                           |              |
| Slip resistance                             | As per mfg.                                         | > 0.40                    | ISO-10545-17 |
| Fire resistance                             | As per mfg.                                         | Fireproof                 | N.A.         |
| Lead & Cafmium given off by glazes tiles    | As per mfg.                                         | Does not yield Pb & Cd    | ISO-10545-15 |

PACKING DETAILS

| Size                                  | 30x60 CM     | 60x60 CM      | 80x80 CM      | 60x120 CM     | 80x160 CM     | 100x100 CM    | 120x120 CM    | 120x180 CM    |
|---------------------------------------|--------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Pieces / Box                          | 05 Pcs.      | 04 Pcs.       | 02 Pcs.       | 02 Pcs.       | 02 Pcs.       | 02 Pcs.       | 02 Pcs.       | 02 Pcs.       |
| Area / Box                            | 0.9 sq. mtr. | 1.44 sq. mtr. | 1.28 sq. mtr. | 1.44 sq. mtr. | 2.56 sq. mtr. | 2.00 sq. mtr. | 2.88 sq. mtr. | 4.32 sq. mtr. |
| Weight / Box <small>(approx*)</small> | 17.5 kg      | 27 kg         | 26 kg         | 29 kg         | 52 kg         | 40 kg         | 58 kg         | 90 kg         |



**LAVISH GRANITO PVT. LTD.**

Halvad Road, At. Unchi Mandal, Dist. Morbi - 363 642 (Gujarat) India.

---

Cell : +91 99099 80082 | +91 99099 87126

---

E-mail : [export@lavishceramics.com](mailto:export@lavishceramics.com) | [inquiry@lavishceramics.com](mailto:inquiry@lavishceramics.com)

---

Web : [www.lavishceramics.com](http://www.lavishceramics.com)